

DEPARTMENT OF THE ARMY
U.S. Army Corps of Engineers
441 G Street, NW
Washington, DC 20314-1000

EM 1110-1-2910

CECW-CE


Manual
No. 1110-1-2910

10 March 2021

Engineering and Design
REMOTE SENSING

1. Purpose. This Engineer Manual (EM) is intended to promote effective use of remotely sensed data by all U.S. Army Corps of Engineers (USACE) divisions and districts.
2. Applicability. This EM applies to all Headquarters USACE (HQUSACE) elements and USACE commands responsible for integrating remotely sensed and geospatial data into Civil Works projects.
3. Distribution Statement. Approved for public release. Distribution is unlimited.

FOR THE COMMANDER

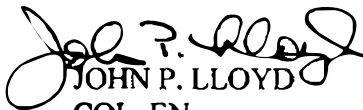
JOHN P. LLOYD
COL, EN
Chief of Staff

*This manual supersedes EM 1110-2-2907, dated 1 October 2003.

CONTENTS

	Paragraph	Page
Purpose.....	1.....	i
Applicability.....	2.....	i
Distribution Statement.	3.....	i
Chapter 1: Introduction to Remote Sensing.....		
Purpose of This Manual.	1.1.....	1
Applicability.....	1.2.....	1
Distribution Statement.	1.3.....	1
References.	1.4.....	1
Records Management (Recordkeeping) Requirements.....	1.5.....	2
Contents of This Manual.....	1.6.....	2
Chapter 2: Principles of Remote Sensing Systems.....		
Introduction.....	2.1.....	3
Definition of Remote Sensing.....	2.2.....	3
Basic Components of Remote Sensing.....	2.3.....	3
Component 1: Electromagnetic Energy Is Emitted from a Source.....	2.4.....	4
Component 2: Interaction of Electromagnetic Energy with Matter.....	2.5.....	14
Component 4: Energy Is Detected and Recorded by the Sensor.....	2.6.....	21
Brief History of Remote Sensing.....	2.7.....	29
Future of Remote Sensing.....	2.8.....	31
Chapter 3: Three-Dimensional (3D) Data Acquisition.....		
Light Detection and Ranging Systems.....	3.1.....	33
Structure from Motion.....	3.2.....	43
Chapter 4: Processing Geospatial Data.....		
Introduction.....	4.1.....	47
Image Processing Software.....	4.2.....	47
Metadata.....	4.3.....	47
Viewing the Image.....	4.4.....	48
Band/Color Composite.....	4.5.....	48
Displaying Imagery: Ellipsoids, Datums, and Projections.....	4.6.....	49
Registration and Rectification.....	4.7.....	50
Resampling.....	4.8.....	51
Image Enhancement.....	4.9.....	53
Image Mosaics, Image Subsets, and Multiple Image Analysis.....	4.10.....	69
Digital Elevation Models (DEMs).....	4.11.....	71
Advanced Topics in Image Processing.....	4.12.....	72

Table List

Table 2.1 Different scales used to measure object temperature, conversion formulas are listed below.....	8
Table 2.2 Wavelengths of the primary colors of the visible spectrum	12
Table 2.3 Common subdivisions of the infrared (IR) wavelength region	12
Table 2.4 Wavelengths of various bands in the microwave range.....	13
Table 2.5 Properties of Different Atmospheric Scattering Effects.....	20
Table 2.6 Digital Number (DN) value ranges for various unsigned integer types.....	23
Table 3.1 Typical flight characteristics and point density.	41
Table 4.1 Minimizing the effects of shadows using a band ratio	61
Table 4.2 Variety in 9-Matix Kernel Filters Used in a Convolution Enhancement.	63
Table 4.3 Omission and Commission Accuracy Assessment Matrix (Jensen 1996).....	72

Figure List

Figure 2.1. As an electron jumps from a higher to lower energy level,.....	7
Figure 2.2. Propagation of the electromagnetic and magnetic field.	8
Figure 2.3. Wave morphology— wavelength (λ) is measured from crest-to-crest or trough-to-trough	9
Figure 2.4. Long wavelengths maintain a low frequency and lower energy state relative to the short wavelengths.....	9
Figure 2.5. Frequency (ν) refers to the number of crests of waves of the same wavelength that pass by a point (P) in each second.....	9
Figure 2.6. Electromagnetic spectrum displayed in meter (m) and Hertz (Hz) units;	11
Figure 2.7. Spectral intensity of different emitted temperatures.	15
Figure 2.8. The Sun and Earth both emit electromagnetic radiation;	16
Figure 2.9. Incident radiation encountering a material will be reflected, absorbed, or transmitted through the medium.	17
Figure 2.10. Plot of atmospheric transmission for solar (left panel) and terrestrial (right panel) energy sources.....	18
Figure 2.11. Specular reflection or mirror-like reflection (left) and diffuse reflection (right)	19
Figure 2.12. Diagram of Rayleigh and Mie scattering processes by particle size	20
Figure 2.13. This image illustrates a range of scattering conditions.	21
Figure 2.14. Moon rising in the Earth's horizon.....	22
Figure 2.15. This figure simulates the creation of a raster product;	24
Figure 2.16. Example pixel appearance and data values in an 8-bit unsigned integer, greyscale image.....	25
Figure 2.17. Spectral reflectance of snow from Aster Spectral Library	27
Figure 2.18. Spectral reflectance of healthy vegetation from the Aster Spectral Library	28
Figure 2.19. Spectral reflectance of one variety of soil using the Aster Spectral Library	29
Figure 2.20. Spectral reflectance of grass, soil, water, and snow using the Aster Spectral Library	30

Figure 3.1. Graphical representation of discrete return and full waveform airborne laser measurements for different target situations.....	36
Figure 3.2. Comparison of traditional Light Detection and Ranging (LiDAR) (left) with single photon-sensitive detection LiDAR (left two images).....	38
Figure 3.3. (a) Oscillating Scanning Mirror (b) Rotating Polygon Scanning Mirror (c) Refractive Scanner;.....	39
Figure 3.4. Hillshade Image of LiDAR point cloud showing bare earth filtered digital terrain models (DTM) on the left, and unclassified DEM on the right.....	43
Figure 3.5. Height of Tree Canopy (color scale) Derived from Difference between DTM and DEM for Study Area.....	44
Figure 3.6. Additional Classification of the Point Cloud Beyond Ground and Non-Ground Returns to Include Transmission Towers and Transmission Wires.....	44
Figure 3.7. LiDAR Intensity Map of University of Houston Campus.....	45
Figure 3.8. With only the left image, point X could be at any location (X1, X2, X3...) along line.....	46
Figure 3.9. Visualization of Colorized Point Cloud Created Using Bentley ContextCapture	47
Figure 4.1. Figure 4.1a is a true color composite, where RGB = Red, Green, Blue.....	50
Figure 4.2. Basic elements of a geographic projection.....	54
Figure 4.3. A linear stretch involves identifying the minimum and maximum brightness values in the image histogram and applying a transformation to stretch this range to fill the full range across 0 to 255	56
Figure 4.4. Contrast in an image before (left) and after (right) a linear contrast stretch	57
Figure 4.5. Pixel population and distribution across the 0 to 255 DN range.....	58
Figure 4.6. Unenhanced satellite data.....	59
Figure 4.7. Example histograms from a histogram equalization stretch.....	60
Figure 4.8. Landsat TM band 345 RGB color composite.....	64
Figure 4.9. Idealized principle components (PC) analysis.	65
Figure 4.10. PC-1 contains most of the variance in the data, each successive PC-transformation isolates less and less variation in the data.....	66
Figure 4.11. Landsat image (left) and its corresponding thematic map (right)	67
Figure 4.12. Classification training data of 35 landscape classification features	68
Figure 4.13. Example classification method outputs from left to right:	69
Figure 4.14. Multi-image mosaic of Western United States centered on the state of Utah.....	73
Figure 4.15. DEM. The brightness values in this image represent elevation data.....	75
Figure 4.16. Hyperspectral classification image of the Kissimmee River in Florida.....	76
Figure 4.17. Close-up of the Atlantic Gulf Stream;.....	77
Figure 4.18. A Synthetic Aperture Radar Radarsat image (10-meter resolution) centered on St. Louis, Missouri;	78

Glossary

Chapter 1.

Introduction to Remote Sensing

1.1. Purpose of This Manual. This EM is intended to promote effective use of remotely sensed data by all USACE divisions and districts.

1.1.1. This manual reviews the theory and practice of remote sensing and image processing. Remote sensing provides a cost-effective means of surveying, monitoring, and mapping objects at or near the surface of the Earth. This technology has been rapidly integrated into a variety of USACE applications and has proven to be valuable in meeting Civil Works business program requirements.

1.1.2. A goal of the Remote Sensing and Geographic Information Systems (GIS) Center of Expertise (RS/GIS CX) at the USACE Engineer Research and Development Center Cold Regions Research Engineering Laboratory (CRREL) is to enable effective use of remotely sensed data by all USACE divisions and districts. The USACE RS/GIS CX supports new and promising remote sensing and GIS technologies. Introductory and Advanced Remote Sensing and GIS PROSPECT courses are offered through the RS/GIS CX.

1.1.3. The practice of remote sensing has become greatly simplified by useful and affordable commercial software, which has made numerous advances in recent years. Satellite and airborne platforms provide local and regional perspective views of the Earth's surface. These views are accessible at various resolutions and are highly accurate depictions of surface objects. Satellite images and image processing allow researchers to better understand and evaluate a variety of Earth processes occurring on the surface and in the hydrosphere, biosphere, and atmosphere.

1.2. Applicability. This EM applies to all HQUSACE elements and USACE commands responsible for integrating remotely sensed and geospatial data into Civil Works projects.

1.3. Distribution Statement. Approved for public release. Distribution is unlimited.

1.4. References.

1.4.1. Baldrige, A.M., S.J. Hook, C.I. Grove, and G. Rivera. 2009. The ASTER Spectral Library, Version 2.0. Remote Sensing of Environment, Vol. 113, pp. 711–715. <https://doi.org/10.1016/j.rse.2008.11.007>.

1.4.2. Kokaly, R.F., Clark, R.N., Swayze, G.A., Livo, K.E., Hoefen, T.M., Pearson, N.C., Wise, R.A., Benzel, W.M., Lowers, H.A., Driscoll, R.L., and Klein, A.J. 2017. The United States Geological Survey (USGS) Spectral Library, Version 7: USGS Data Series 1035, 61 pp., <https://doi.org/10.3133/ds1035>.

1.4.3. Luhmann T., Robson S., Kyle S., and J. Boehm. 2013. Close Range Photogrammetry: Principles, Techniques, and Applications (Caithness: Whittles Publishing), pp. 683. https://www.whittlespublishing.com/Close_Range_Photogrammetry.

1.4.4. Maune, D. and A. Nayegandhi (eds.). 2019. Digital Elevation Model Technologies and Applications: The DEM User's Manual, 3rd Edition (Bethesda, MD: American Society for Photogrammetry and Remote Sensing), pp. 655. <https://www.asprs.org/dem>.

1.4.5. Meerdink, S.K., Hook, S.J., Roberts, D.A., & Abbott, E.A. 2019. The ECOSTRESS Spectral Library, Version 1.0. *Remote Sensing of Environment*, 230(111196), pp. 1–8. <https://doi.org/10.1016/j.rse.2019.05.015>.

1.4.6. Jensen, J.R. 1996. *Introductory Digital Image Processing: A Remote Sensing Perspective*, 2nd Edition. NJ: Prentice-Hall. <https://www.cabdirect.org/cabdirect/abstract/20001911540>.

1.4.7. Renslow, M. (ed.). 2012. *Manual of Airborne Topographic LiDAR* (Bethesda, MD: American Society for Photogrammetry and Remote Sensing), pp. 504.

1.4.8. Shan, J. and C. Toth (eds.). 2009. *Topographic Laser Ranging and Scanning* (New York, NY: CRC Press), pp. 590. <https://www.crcpress.com/Topographic-Laser-Ranging-and-Scanning-Principles-and-Processing-Second/Shan-Toth/p/book/9781498772273>.

1.4.9. Vosselmann, G. and H-G Maas (eds.). 2010. *Airborne and Terrestrial Laser Scanning* (New York, NY: CRC Press), pp. 318.

1.4.10. Wolf P., Dewitt B., Wilkenson, B. 2014. *Elements of Photogrammetry*, 4th Edition, (Boston: McGraw Hill), 676pp. <https://www.mheducation.com/highered/product/elements-photogrammetry-application-gis-fourth-edition-wolf-dewitt/9780071761123.html>.

1.5. Records Management (Recordkeeping) Requirements. The records management requirement for all record numbers, associated forms, and reports required by this regulation are addressed in the Army's Records Retention Schedule—Army (RRS-A). Detailed information for all related record numbers are located in the Army Records Information Management System (ARIMS)/RRS-A at <https://www.arims.army.mil>. If any record numbers, forms, and reports are not current, addressed, and/or published correctly in ARIMS/RRS-A, see Department of the Army Pamphlet 25-403, *Guide to Recordkeeping in the Army*.

1.6. Contents of This Manual.

1.6.1. The objective of this manual is to provide both theoretical and practical information to aid acquiring, processing, and interpreting remotely sensed data. Additionally, this manual provides reference materials and sources for further study and information.

1.6.2. Included in this work is a background of the principles of remote sensing, with a focus on the physics of electromagnetic waves and the interaction of electromagnetic waves with objects. Aerial photography and history of remote sensing are briefly discussed.

1.6.3. The fundamentals of image processing are presented along with a summary of map projection and information extraction. Helpful examples and tips are presented to clarify concepts and to enable the efficient use of image processing.

1.6.4. Examples of remote sensing applications are presented.

1.6.5. A glossary of remote sensing terms is presented at the end of this manual.

1.6.6. This manual represents the combined efforts of individuals from CRREL, the USACE Engineer Research and Development Center Geospatial Research Laboratory, AGC, the USACE Wilmington District, and the University of Houston.

This page intentionally left blank

Chapter 2.

Principles of Remote Sensing Systems

2.1. Introduction. The principles of remote sensing are based primarily on the properties of the electromagnetic spectrum and the geometry of airborne or satellite platforms relative to their targets. This chapter provides a background on the physics of remote sensing, including discussions of energy sources, electromagnetic spectra, atmospheric effects, interactions with the target or ground surface, spectral reflectance curves, and the geometry of image acquisition.

2.2. Definition of Remote Sensing.

2.2.1. Remote sensing describes the collection of data about an object, area, or phenomenon from a distance with a device that is not in physical contact with the object. Such data are collected from ground-based, airborne, and satellite platforms that house sensor equipment. The data collected by the sensors are in the form of electromagnetic energy, which is the energy emitted, absorbed, or reflected by objects. Electromagnetic energy is synonymous with many terms, including electromagnetic radiation, radiant energy, energy, and radiation.

2.2.2. Sensors carried by platforms are engineered to detect variations of emitted and reflected electromagnetic radiation. A simple and familiar example of a platform carrying a sensor is a camera mounted on the underside of an airplane. The airplane may be a high or low altitude platform while the camera functions as a sensor collecting data from the ground. The data in this example are reflected electromagnetic energy commonly known as visible light.

2.2.3. Likewise, spaceborne platforms known as satellites, such as Landsat Thematic Mapper (Landsat TM), Satellite Pour l'Observation de la Terra or SPOT, Moderate-Resolution Imaging Spectroradiometer (MODIS), Worldview, and many others carry a variety of sensors. Similar to the above camera example, the sensors on these “passive” systems collect emitted and reflected electromagnetic energy, and are capable of recording radiation from the visible and other portions of the electromagnetic spectrum. Some remote sensing systems are categorized as “active” (e.g., radar and LiDAR) in that they both transmit and receive electromagnetic energy, measuring the reflected radiation returned to the sensor.

2.3. Basic Components of Remote Sensing. The overall process of remote sensing can be broken down into four components:

2.3.1. Electromagnetic energy is emitted from a source, either natural (most commonly the Sun) or from a manmade system.

2.3.2. This energy interacts with matter, including the atmosphere and objects on the Earth's surface.

2.3.3. Emitted or reflected energy is recorded by a sensor as data.

2.3.4. Data is displayed digitally for visual and numerical interpretation.

2.4. Component 1: Electromagnetic Energy Is Emitted from a Source.

2.4.1. Electromagnetic Energy: Source, Measurement, and Illumination. Remote sensing data become extremely useful when there is a clear understanding of the physical principles that govern what we are observing in the imagery. Many of these physical principles have been known and understood for decades, if not centuries. For this manual, the discussion will be limited to the critical elements that contribute to our understanding of remote sensing principles.

2.4.2. Summary of Electromagnetic Energy. Electromagnetic energy or radiation is derived from the subatomic vibrations of matter and is measured in a quantity known as wavelength. The units of wavelength are traditionally given as micrometers (μm) or nanometers (nm). Electromagnetic energy travels through space at the speed of light and can be absorbed and reflected by objects. To understand electromagnetic energy, it is necessary to discuss the origin of radiation, which is related to the temperature of the matter from which it is emitted.

2.4.3. Temperature. The origin of all energy (electromagnetic energy or radiant energy) begins with the vibration of subatomic particles called photons (Figure 2.1). All objects at a temperature above absolute zero vibrate and therefore emit some form of electromagnetic energy. Temperature is a measurement of this vibrational energy emitted from an object. Humans are sensitive to the thermal aspects of temperature; the higher the temperature is the greater is the sensation of heat. A “hot” object emits relatively large amounts of energy. Conversely, a “cold” object emits relatively little energy.

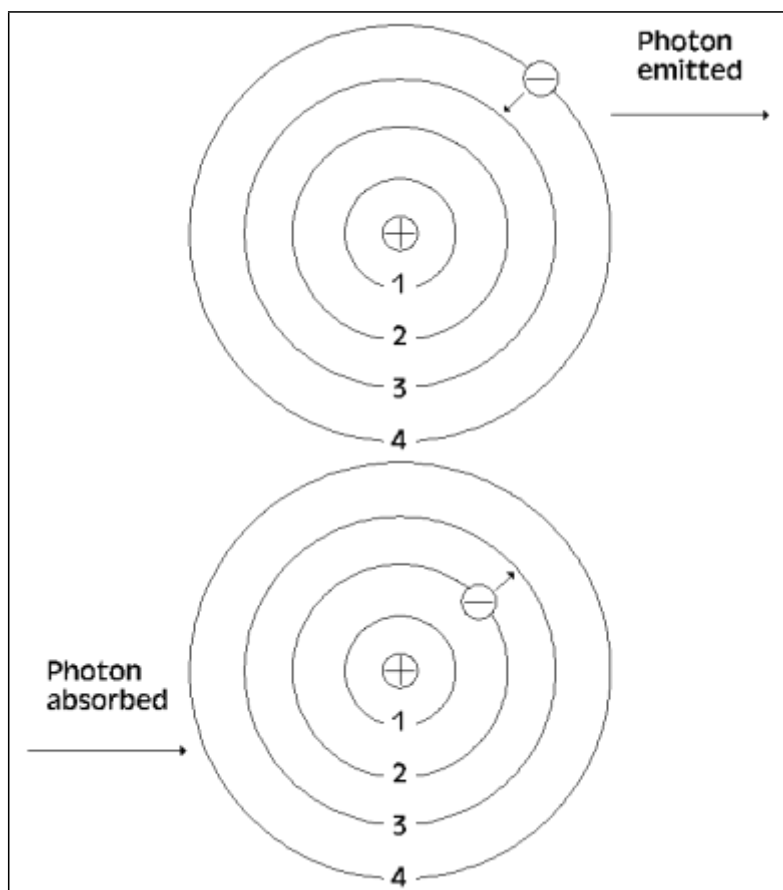


Figure 2.1. As an electron jumps from a higher to lower energy level, shown in top figure, a photon of energy is released. The absorption of photon energy by an atom allows electrons to jump from a lower to a higher energy state

2.4.4. Absolute Temperature Scale. The lowest possible temperature has been shown to be -273.2°C and is the basis for the absolute temperature scale. The absolute temperature scale, known as Kelvin, is adjusted by assigning -273.2°C to 0 K (“zero Kelvin”; no degree sign). The Kelvin scale has the same temperature intervals as the Celsius scale, so conversion between the two scales is simply a matter of adding or subtracting 273 (Table 2.1). Because all objects with temperatures above, or higher than, zero Kelvin emit electromagnetic radiation, it is possible to collect, measure, and distinguish energy emitted from adjacent objects.

Table 2.1

Different scales used to measure object temperature, conversion formulas are listed below

Object	Fahrenheit (°F)	Celsius (°C)	Kelvin (K)
Absolute zero	-459.7	-273.2	0.0
Frozen water	32.0	0.0	273.16
Boiling water	212.0	100.0	373.16
Sun	9981.0	5527.0	5800.0
Earth	46.4	8.0	281.0
Human body	98.6	37.0	310.0

2.4.5. Nature of Electromagnetic Waves. Electromagnetic energy travels along the path of a sinusoidal wave (Figure 2.2) at the speed of light (3.00×10^8 m/s). All emitted and reflected energy travels at this rate, including light. Electromagnetic energy has two components, the electric and magnetic fields. This energy is defined by its wavelength (λ) and frequency (ν); see below for units. These fields are in-phase, perpendicular to one another, and oscillate normal to their direction of propagation (Figure 2.2). Familiar forms of radiant energy include X-rays, ultraviolet (UV) rays, visible light, microwaves, and radio waves. All of these waves move and behave similarly; they differ only in radiation intensity.

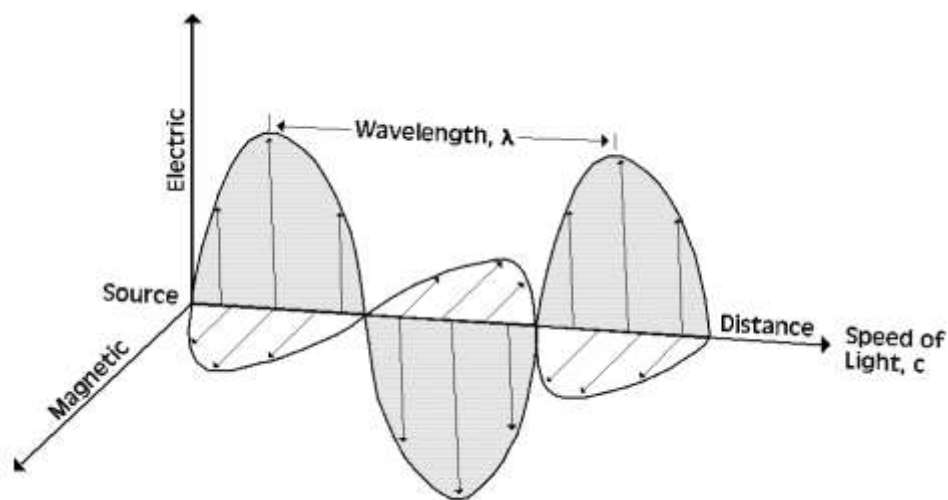


Figure 2.2. Propagation of the electromagnetic and magnetic field. Waves vibrate perpendicular to the direction of motion; electric and magnetic fields are at right angle to each other. These fields travel at the speed of light.

2.4.6. Measurement of Electromagnetic Wave Radiation. Electromagnetic waves are measured from wave crest to wave crest or conversely from trough to trough. This distance is known as wavelength (λ or “lambda”) and is expressed in units of micrometers (μm) or nanometers (nm) (Figure 2.3 and Figure 2.4).

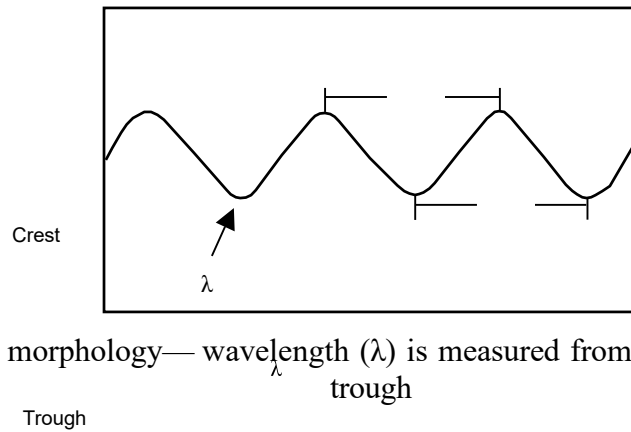


Figure 2.3. Wave morphology—wavelength (λ) is measured from crest-to-crest or trough-to-trough

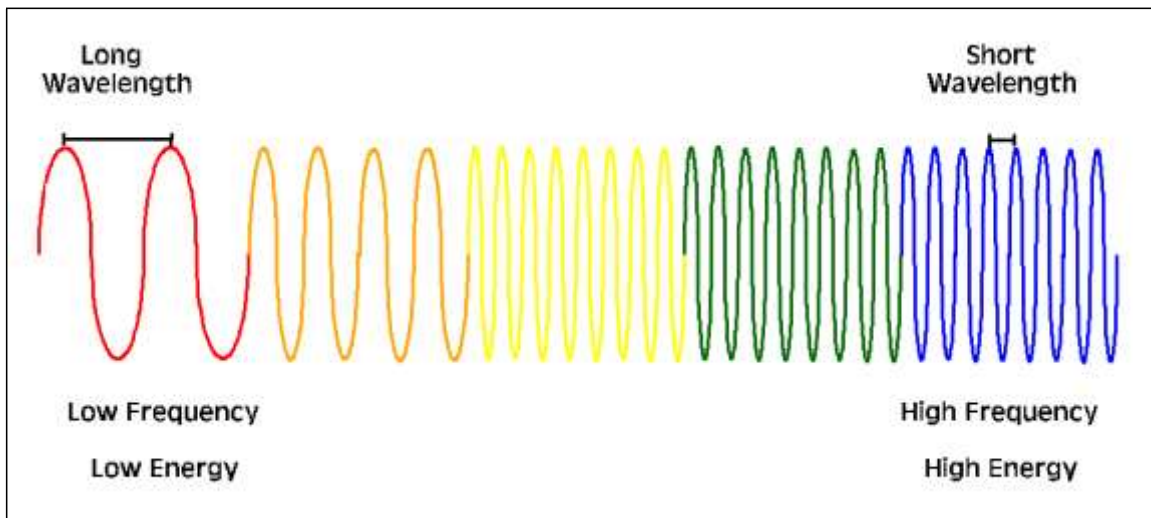


Figure 2.4. Long wavelengths maintain a low frequency and lower energy state relative to the short wavelengths

2.4.6.1. Frequency. The rate at which a wave passes a fixed point is known as the wave frequency and is denoted as ν ("nu"). The units of measurement for frequency are given as Hertz (Hz), the number of wave cycles per second (Figure 2.4 and Figure 2.5).

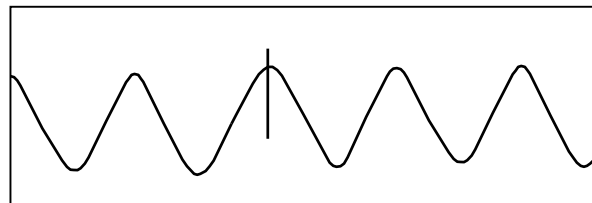


Figure 2.5. Frequency (ν) refers to the number of crests of waves of the same wavelength that pass by a point (P) in each second

2.4.6.2. Speed of electromagnetic radiation (or speed of light). Wavelength and frequency are inversely related to one another; as one increases the other decreases. Their relationship is expressed as:

$$c = \lambda \nu \quad (\text{Equation 2.1})$$

where

c = the speed of light (3.0×10^8 m/s)

λ = the wavelength (m)

ν = frequency (Hz)

This mathematical expression also indicates that wavelength (λ) and frequency (ν) are both proportional to the speed of light (c). Because the speed of light is constant, radiation with a relatively short wavelength will have a relatively high frequency; conversely, radiation with a relatively long wavelength will have a relatively low frequency.

2.4.7. Electromagnetic Spectrum.

2.4.7.1. Electromagnetic radiation wavelengths are typically plotted on a logarithmic scale, in increments of powers of 10, known as the electromagnetic spectrum (Figure 2.6). Though the spectrum is commonly divided into various regions based on certain characteristics of particular wavelengths, it is truly a continuum of increasing wavelengths with no inherent differences among the radiation of varying wavelengths.

2.4.7.2. For instance, the visible region of the electromagnetic spectrum is commonly classified as the wavelength region spanning approximately 400 to 700 nm (Figure 2.6). This region represents the range of wavelengths within which the human eye can typically detect colors. However, the upper and lower boundaries of this region are somewhat arbitrarily defined, as the precise limits of human vision can vary between individuals.

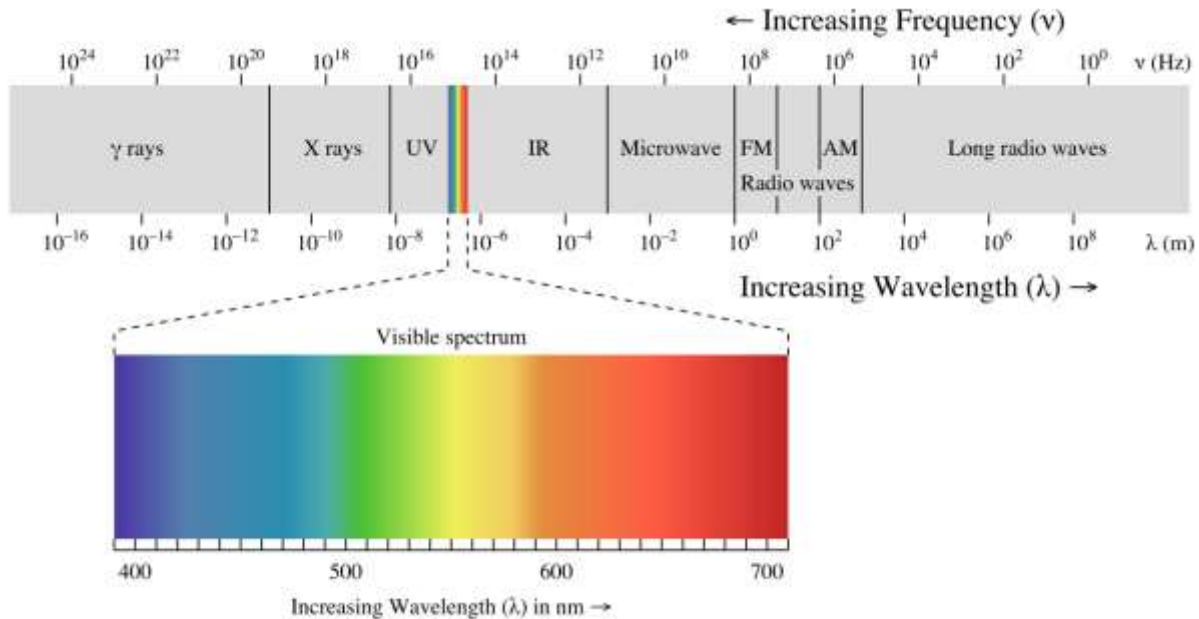


Figure 2.6. Electromagnetic spectrum displayed in meter (m) and Hertz (Hz) units; short wavelengths are shown on the left, long wavelengths on the right and the visible spectrum is shown in red

2.4.8. Regions of the Electromagnetic Spectrum. Different regions of the electromagnetic spectrum can provide discrete information about an object. The categories of the electromagnetic spectrum represent groups of measured electromagnetic radiation with similar wavelength and frequency. Remote sensors are engineered to detect specific spectrum wavelength and frequency ranges. Most sensors operate in the visible, infrared (IR), and microwave regions of the spectrum. The following paragraphs discuss prominent regions of the electromagnetic spectrum and their general characteristics and potential uses. The spectrum regions are discussed in order of increasing wavelength and decreasing frequency.

2.4.8.1. UV. The UV portion of the spectrum contains radiation just beyond the violet portion of the visible wavelengths (Figure 2.6). UV radiation has relatively short wavelengths (10 to 400 nm) and high frequencies. UV wavelengths are used in geologic and atmospheric science applications. Materials, such as rocks and minerals, fluoresce or emit visible light in the presence of UV radiation. The fluorescence associated with natural hydrocarbon seeps is useful in monitoring oil fields at sea. In the upper atmosphere, UV radiation is greatly absorbed by ozone (O_3) and becomes an important tool in tracking changes in the ozone layer.

2.4.8.2. Visible Light. The radiation detected by human eyes is in the spectrum range aptly named the visible spectrum. Visible radiation or light is the only portion of the spectrum that can be perceived as colors. These wavelengths span a very short portion of the spectrum, ranging from approximately 400 to 700 nm. Because of this short range, the visible portion of the spectrum is often plotted on a linear scale, as in Figure 2.6. This linear scale allows the individual colors in the visible spectrum to be discretely depicted. The shortest visible

wavelength is violet and the longest is red. The visible colors and their corresponding wavelengths are listed in Table 2.2.

2.4.8.3. Visible light detected by sensors depends greatly on the surface reflection characteristics of objects. Urban feature identification, soil/vegetation discrimination, ocean productivity, cloud cover, precipitation, snow, and ice cover are only a few examples of current applications that use the visible range of the electromagnetic spectrum.

Table 2.2
Wavelengths of the primary colors of the visible spectrum

Color	Wavelength (nm)
Violet	400 – 446
Blue	446 – 500
Green	500 – 578
Yellow	578 – 592
Orange	592 – 620
Red	620 – 700

2.4.8.4. IR.

a. The portion of the electromagnetic spectrum adjacent to the visible range is the IR region (Figure 2.6). This energy is not visible to the human eye but is experienced by humans as the sensation of heat. The IR region ranges from approximately 700 nm to 1 mm, which is more than 100 times as large of a range as that of visible light. The IR region can be subdivided into several sub-regions as outlined in Table 2.3.

b. Near-IR is the range of wavelengths just beyond (longer than) the red portion of the visible light region. Near-IR and short-wavelength IR (SWIR) wavelengths are also commonly referred to as reflected IR, as measurements of the reflection of these wavelengths (emitted by the Sun) off Earth surfaces can be diagnostic of various properties such as vegetation health and soil composition. The mid- and longer IR wavelengths are categorized as “thermal” IR, as they are emitted from the Earth’s surface in the form of thermal energy and are used to measure temperature variations between various surfaces and objects.

Table 2.3
Common subdivisions of the IR wavelength region

IR Sub-regions	Wavelengths (μm)
Near-IR (NIR)	.7 – 1.4
Short-Wavelength IR (SWIR)	1.4 – 3
Mid-Wavelength IR (MWIR)	3 – 8
Long-Wavelength IR (LWIR)	8 – 15
Far IR (FIR)	15 – 1,000

2.4.8.5. Microwave.

a. Beyond the IR region is the microwave region, including a very broad range of wavelengths from 1 mm to 1 m. Various bands of microwave radiation commonly used in remote sensing applications are listed in Table 2.4. These bands are diagnostic of certain properties of various materials they interact with. Microwave radiation includes the longest wavelengths typically used for remote sensing applications.

b. Microwave remote sensing is used in the studies of meteorology, hydrology, oceans, geology, agriculture, forestry, and ice, and for topographic mapping. Because microwave emission is influenced by moisture content, it is useful for mapping soil moisture, sea ice, currents, and surface winds. Other applications include snow wetness analysis, profile measurements of atmospheric ozone and water vapor, and detection of oil slicks.

Table 2.4
Wavelengths of various bands in the microwave range

Band	Frequency (MHz)	Wavelength (cm)
Ka	40,000–26,000	0.8–1.1
K	26,500–18,500	1.1–1.7
X	12,500–8000	2.4–3.8
C	8000–4000	3.8–7.5
L	2000–1000	15.0–30.0
P	1000–300	30.0–100.0

2.4.9. Quantifying Energy. In addition to wavelength and frequency, it is also useful to measure the intensity exhibited by electromagnetic energy. Intensity can be described by Q and is measured in units of Joules (J). The following equation shows the relationship between electromagnetic wavelength, frequency, and intensity:

$$Q = h \nu \quad (\text{Equation 2.2})$$

Because $c = \lambda \nu$, Q also equals

$$Q = h c / \lambda$$

where

Q = energy of a photon in J

h = Planck's constant (6.6×10^{-34} J s)

c = the speed of light, (3.0×10^8 m s⁻¹)

λ = wavelength (μm)

ν = frequency (s⁻¹ or Hz)

2.4.9.1. The equation for energy indicates that, for long wavelengths, the amount of energy will be low, and for short wavelengths, the amount of energy will be high. For instance, blue light is on the short wavelength end of the visible spectrum (446 to 500 nm) while red is on the longer end of this range (620 to 700 nm). Thus, blue light is a higher energy radiation than red light.

2.4.9.2. Implications for Remote Sensing. The relationship between energy and wavelengths has implications for remote sensing. For example, in order for a sensor to detect low-energy microwaves (which have a large λ), it will have to remain fixed over a site for a relatively long period of time, known as “dwell time.” Dwell time is critical for the collection of an adequate amount of radiation. Conversely, low energy microwaves can be detected by “viewing” a larger area to obtain a detectable microwave signal. The latter is typically the solution for collecting lower energy microwaves.

2.4.10. Black Body Emission. Energy emitted from an object is a function of its surface temperature. An idealized object called a black body is used to model and approximate the electromagnetic energy emitted by an object. A black body completely absorbs and re-emits all radiation incident to (striking) its surface. A black body emits electromagnetic radiation at all wavelengths if its temperature is above 0 Kelvin. The Wien and Stefan-Boltzmann Laws explain the relationship between temperature, wavelength, frequency, and intensity of energy.

2.4.10.1. Wien’s Displacement Law. In (Equation 2.2, wavelength is shown to be an inverse function of energy. It is also true that wavelength is inversely related to the temperature of the source. This is explained by Wien’s Displacement Law:

$$\lambda_{\max} = b/T \quad (\text{Equation 2.3})$$

where

λ_{\max} = wavelength of maximum emission (μm)

b = Wien’s constant ($2898 \mu\text{m K}$)

T = temperature of object (K)

Using this formula, we can determine the temperature of an object by measuring the wavelength of its incoming radiation.

2.4.10.2. The Stefan-Boltzmann Law. The Stefan-Boltzmann Law states that the total energy radiated by a black body per volume of time is proportional to the fourth power of temperature. This can be represented by the following equation:

$$j^* = \sigma T^4 \quad (\text{Equation 2.4})$$

where

j^* = radiant exitance or emissive power (W)

σ = Stefan-Boltzmann constant ($5.6697 \times 10^{-8} \text{ W m}^{-2} \text{ K}^{-4}$)

T = temperature of the object (K)

This simply means that the total energy emitted from an object rapidly increases with only slight increases in temperature. Therefore, a hotter black body emits more radiation at each wavelength than a cooler one (Figure 2.7).

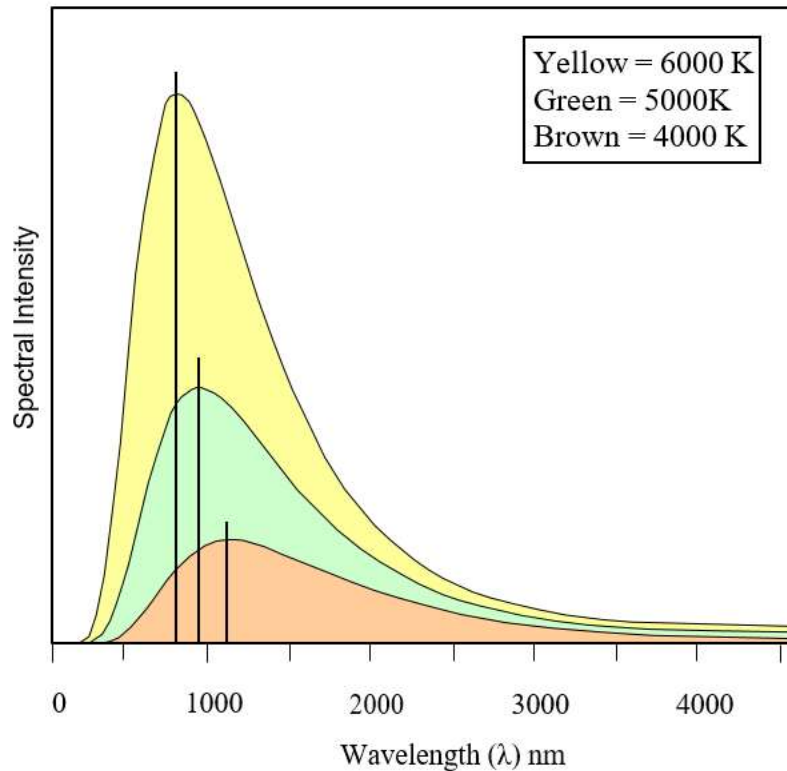


Figure 2.7. Spectral intensity of different emitted temperatures. The horizontal axis is wavelength in nm and the vertical axis is spectral intensity. The vertical bars denote the peak intensity for the temperatures presented. These peaks indicate a shift toward higher energies (lower wavelengths) with increasing temperatures.

2.4.10.3. Summary. Together, the Wien and Stefan-Boltzmann Laws are powerful tools. From these equations, temperature and radiant energy can be determined from an object's emitted radiation. For example, ocean water temperature distribution can be mapped by measuring the emitted radiation, discrete temperatures over a forest canopy can be detected, and surface temperatures of distant solar system objects can be estimated.

2.4.11. The Sun and Earth as Black Bodies. The Sun's surface temperature is 5800 K; at that temperature, much of the energy is radiated as visible light (Figure 2.8). We can therefore see much of the spectra emitted from the Sun. Scientists speculate the human eye has evolved to take advantage of the portion of the electromagnetic spectrum most readily available (i.e., sunlight). Note from the figure that the Earth's emitted radiation peaks between 6 to 16 μm ; to "see" these wavelengths, one must use a remote sensing detector.

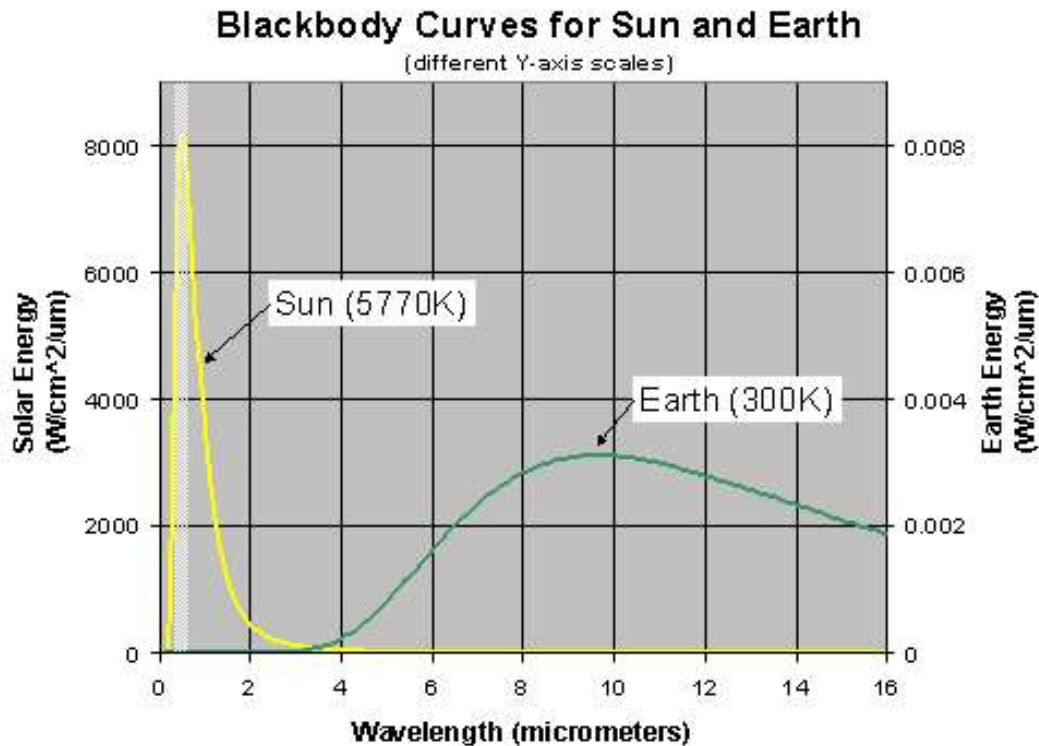


Figure 2.8. The Sun and Earth both emit electromagnetic radiation; the Sun's temperature is approximately 5770 Kelvin and the Earth's temperature is centered on 300 Kelvin

2.4.12. Passive and Active Sources.

2.4.12.1. The energy referred to above is classified as passive energy. Passive energy is emitted directly from a natural source. The Sun, rocks, the ocean, and humans are all examples of passive sources. Remote sensing instruments are capable of collecting energy from both passive and active sources.

2.4.12.2. Active energy is energy generated and transmitted from the sensor itself. Active radar systems transmit their own microwave energy to the surface terrain; the strength of energy returned to the sensor is recorded as representing the surface interaction. Similarly, LiDAR systems (discussed in detail in 0) transmit light to objects in the form of lasers and receive the returned signal to derive distance measurements.

2.5. Component 2: Interaction of Electromagnetic Energy with Matter. Absorption, Transmission, and Reflection. After leaving the source, the emitted energy undergoes a potentially transformative journey on its path to the sensor, changing intensity, wavelength, and direction depending on what materials it encounters along the way. When light encounters other matter, it is absorbed, transmitted, or reflected (Figure 2.9). The intensity and contribution of these effects depend on the wavelength of light, the material in question, and the geometry of the interaction; however, their sum will equal that of the incident energy:

$$EI = EA + ET + ER$$

(Equation 2.5)

where

EI = incident energy striking an object

EA = absorbed radiation

ET = transmitted energy

ER = reflected energy

The following discussion will highlight these interactions in the case of passive solar remote sensing, where the Sun is the energy source, and the emitted energy interacts with the Earth's atmosphere and surface before reaching the sensor.

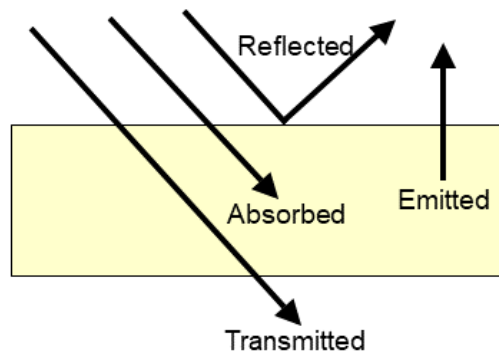


Figure 2.9. Incident radiation encountering a material will be reflected, absorbed, or transmitted through the medium. Materials also emit radiation; the wavelength of the emitted radiation is a function of their temperature.

2.5.1. Absorption. With reference to electromagnetic radiation, absorption is the conversion of incident energy into internal energy (most commonly as an increase in temperature) by a material. Absorption is measured as a percentage and is often presented as the opposite of transmission (when referring to the atmosphere) or reflectance (when referring to surface objects) because it is essentially a loss or attenuation of the remote signal. Absorbed energy is incorporated into the chemical bonds of the impacted material, and the bond length, which depends on the chemical makeup of the material, governs which wavelengths are absorbed. Generally, the intensity of the incident energy does not influence absorption.

2.5.2. Transmission occurs when radiation passes through a material. Total absorption (0% transmission) and total transmission (100% transmission) are uncommon as all materials absorb some radiation—this explains why thin or porous media may appear transparent but thicker instances of the same material are opaque.

2.5.3. Atmospheric Windows and Walls.

2.5.3.1. The gases in the Earth's atmosphere absorb a significant amount of the Sun's radiation. Ozone (O₃), carbon dioxide (CO₂), and water vapor (H₂O) are the three main

atmospheric compounds that absorb radiation, and each absorbs radiation at particular wavelengths. To a lesser extent, oxygen (O_2) and nitrogen dioxide (NO_2) also absorb radiation (Figure 2.10).

2.5.3.2. Wavelength regions of high absorption are called atmospheric walls. Regions of high transmission are called atmospheric windows. Most remote sensing systems are interested in imaging the planet's surface, so they are constrained to operating in wavelength regions where there are atmospheric windows. Notable elemental absorption regions are discussed below.

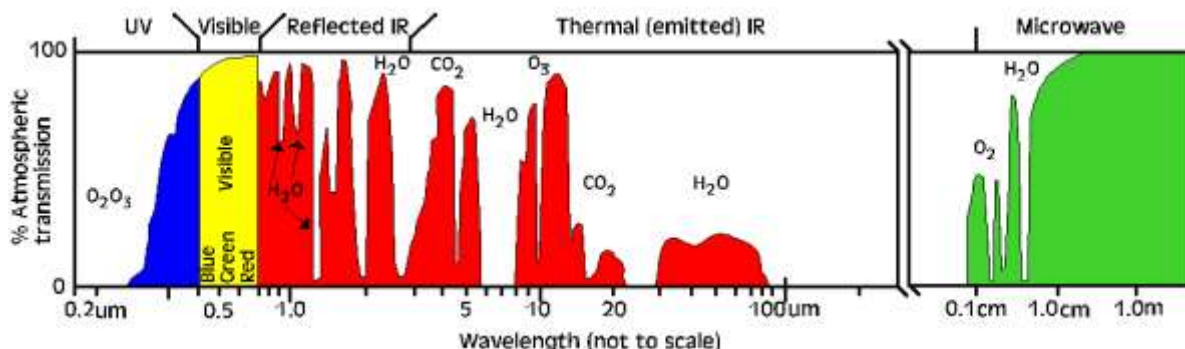


Figure 2.10. Plot of atmospheric transmission for solar (left panel) and terrestrial (right panel) energy sources. Regions of high transmission, atmospheric windows allow radiation to penetrate the Earth's atmosphere and reach the surface and sensor. Regions of low transmission, atmospheric walls are caused by absorption of those wavelengths by gases in the atmosphere; the gases responsible for notable atmospheric walls are indicated by their molecular formula above.

2.5.3.3. Ozone. Ozone (O_3) absorbs harmful UV radiation from the Sun. Without this protective layer in the atmosphere, our skin would burn when exposed to sunlight.

2.5.3.4. Carbon Dioxide. Carbon dioxide (CO_2) is called a greenhouse gas because it greatly absorbs thermal IR radiation. Carbon dioxide thus serves to trap heat in the atmosphere from radiation emitted from both the Sun and the Earth.

2.5.3.5. Water vapor. Water vapor (H_2O) in the atmosphere absorbs incoming longwave IR and shortwave microwave radiation (22 to 1 μm). Water vapor in the lower atmosphere varies annually from location to location. For example, the air mass above a desert would have very little water vapor to absorb energy, while the tropics would have high concentrations of water vapor (i.e., high humidity).

2.5.4. Reflection.

2.5.4.1. Let us suppose for the moment that any radiation that is not absorbed in the atmosphere reaches the Earth's surface—this is not quite true, but because it requires some prior discussion of reflection, scattering will be discussed later in this chapter. Upon reaching near-surface objects, radiation can again be transmitted, absorbed, or reflected. Reflection occurs

when radiation is neither absorbed nor transmitted but is instead bounced off of the object it encountered. This reflected energy is what is collected by the sensor.

2.5.4.2. The intensity and wavelength of the reflected energy depends on the material properties, surface roughness relative to the wavelength of the incident light, and geometry. These differences allow us to delineate different materials and objects in remotely sensed imagery. Reflectance is a unitless quantity describing the percentage of incident radiation that is reflected at a particular wavelength:

$$R_{\lambda} = E_{R,\lambda} / E_{I,\lambda} \quad (\text{Equation 2.6})$$

where

R_{λ} is the reflectance of light of wavelength λ

$E_{R,\lambda}$ is the reflected energy of wavelength λ , and

$E_{I,\lambda}$ is the total incident energy of wavelength λ

2.5.4.3. At each wavelength, a material has a characteristic reflectance, which when taken together form a spectral reflectance curve or spectral signature, which can be used to identify the material. While reflectance is a material property, individual objects reflect light differently based on their surface roughness, their orientation, the orientation of the light source, and the orientation of the sensor. Reflectance describes the ratio of incident to reflected energy for a diffuse or Lambertian surface, orthogonal to the sensor. Deviations from this spatial arrangement result in geometric effects or errors that may need to be corrected for in a remotely sensed product.

2.5.4.4. Specular and diffuse reflection. The nature of reflectance is controlled by the wavelength of the radiation relative to the surface texture. Surface texture is defined by the roughness or bumpiness of the surface relative to the wavelength. Objects display a range of reflectance from diffuse to specular. Specular reflectance is a mirror-like reflection, which occurs when an object with a smooth surface reflects in one direction. The incoming radiation will reflect off a surface at the same angle of incidence (Figure 2.11). Diffuse or Lambertian reflectance reflects in all directions from a rough surface. This type of reflectance gives the most information about an object.

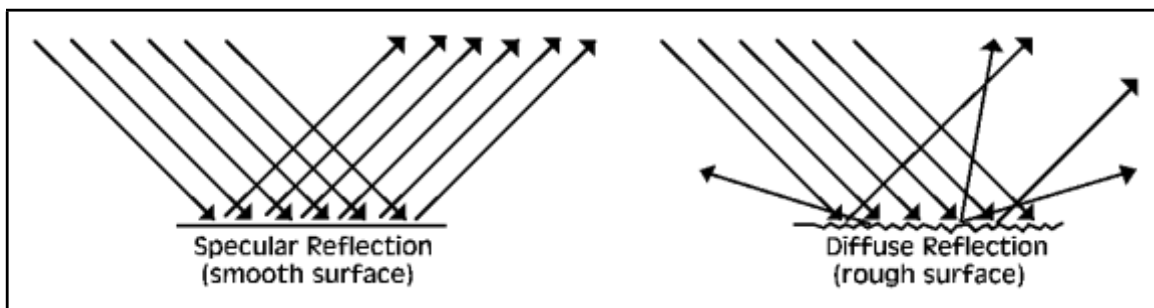


Figure 2.11. Specular reflection or mirror-like reflection (left) and diffuse reflection (right)

2.5.5. Atmospheric Effects.

2.5.5.1. Up to this point, a simplified view of energy's path from the Sun, to a ground target, and back to the sensor has been presented in order to establish the basic interactions of light with matter. In this idealized scenario, light that was not absorbed by the atmosphere traveled to the surface and was either absorbed or reflected to the sensor. In actuality, radiation's journey to the surface involves a plethora of interactions with particles in the atmosphere; however, because the atmospheric constituents are so small, some smaller than the wavelength of the radiation traveling past them, the way that light is transmitted and reflected is somewhat different than with macroscale targets.

2.5.5.2. The interaction of light with liquids, gases, and small particles is often referred to as scattering and is heavily dependent on the size of the particle or scatterer and the wavelength of the incident radiation (Table 2.5). Because the composition and density of the atmosphere varies, the path length or the total distance that radiation travels between the top of the atmosphere, the surface, and the sensor, also affects how much scattering occurs. Three prevalent types of scattering that occur in the atmosphere are Rayleigh scattering, Mie scattering, and nonselective or geometric scattering (Figure 2.12).

Table 2.5
Properties of Different Atmospheric Scattering Effects

Process	Diameter (D) of Particle Relative to Incoming Wavelength (λ)	Result
Rayleigh scattering	$D \ll \lambda$	Short wavelengths are scattered
Mie scattering	$D \approx \lambda$	Long wavelengths are scattered
Nonselective scattering	$\lambda \gg D$	All wavelengths are scattered
Absorption	No relationship	No transmission

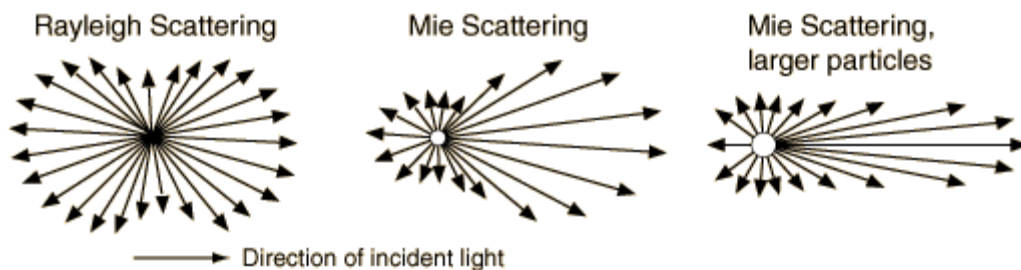


Figure 2.12. Diagram of Rayleigh and Mie scattering processes by particle size

2.5.5.3. Rayleigh Scattering. Rayleigh scattering dominates when the diameters of atmospheric particles (D) are much smaller than the incoming radiation wavelength (λ). This leads to a greater amount of short wavelength scatter resulting from the small particle size of atmospheric gases. Scattering is inversely proportional to wavelength by the fourth power:

$$\text{Rayleigh Scatter} = D / \lambda^4 \quad (\text{Equation 2.7})$$

where

λ is the wavelength (m)

2.5.5.4. This means that shorter wavelengths (those shorter than about 10% of the scatterer's diameter) will be diffusely scattered, or transmitted equally in all directions (Figure 2.12). Longer wavelengths are unaffected and will be transmitted without changing direction. Rayleigh scattering is an elastic scattering process, meaning the wavelength of the scattered light is unchanged, merely separated from the incident spectra (Figure 2.13).



Figure 2.13. This image illustrates a range of scattering conditions. Rayleigh scattering causes the clear sky to be blue near the top of the scene and red nearer the horizon. Mie scattering, and ultimately, nonselective scattering result in the variable appearance of clouds throughout the scene. Note the clouds in the bottom right (and presumably above based on the darkness of the ground surface) are nearly optically opaque. Image courtesy of the National Aeronautics and Space Administration (NASA).

2.5.5.5. Why is the sky blue? Rayleigh scattering accounts for the Earth's blue sky (Figure 2.13). We see predominately blue because the wavelengths in the blue region ($0.446\text{--}0.500\ \mu\text{m}$) are scattered primarily by nitrogen gas (N_2 , $D = 3.6 \times 10^{-10}\ \text{m}$) in the atmosphere. When radiation from the Sun encounters nitrogen molecules, notably those that are not necessarily in the path between the Sun and our eyes, most of the wavelengths are transmitted to the surface or to space, depending on the angle; however, short wavelengths are scattered diffusely, in all directions. Some of that blue light, effectively amplified by the sheer number of interactions, reaches our eyes and makes the sky appear blue.

2.5.5.6. Our perception of sunrise and sunset as red or pink is caused by the same phenomenon. When the Sun is lower in the sky, light must travel through a greater thickness of atmosphere to reach our eyes (Figure 2.13). This increase in path length increases the number of interactions light has with molecules in the atmosphere and increasingly longer wavelengths are

scattered as the incident signal is depleted, leaving only reddish wavelengths to reach the eye. Another example of this effect is “Earthrise” on the Moon as famously captured by the Apollo 8 mission. The Moon has no atmosphere, and therefore, no Rayleigh scattering, so no sunlight is reflected back to the observer. This explains why the Moon’s sky appears black (shadows on the Moon are more black than shadows on the Earth for the same reason; see Figure 2.14).



Figure 2.14. Moon rising in the Earth’s horizon (left). The Earth’s atmosphere appears blue due to Rayleigh Scatter. Photo taken from the Moon’s surface shows the Earth rising (right). The Moon has no atmosphere, thus no atmospheric scatter. Its sky appears black. Moonset (left) image was taken on the Astro-1 Mission, December 1990, NASA. Earthrise (right) was taken from Apollo 8, December 1968, NASA.

2.5.5.7. Mie Scattering. Mie scattering occurs when an atmospheric particle diameter is on the order of the radiation’s wavelength ($D \approx \lambda$), most commonly in the presence of water vapor, dust, smoke, or smog. Mie scattering is both gradational and directional—there is more scattering from larger particles and the intensity of the scattering is in the same direction as the incident radiation. For example, the bright white halo we observe around the Sun is from Mie scattering of water vapor in the atmosphere. Similarly, water droplets (larger diameters than vapor) in clouds appear white because of Mie scattering.

2.5.5.8. Nonselective Scattering. At even larger particle sizes (5–100 μm), Mie scattering approaches the point where all wavelengths are scattered equally or nonselectively. This leads to the scatter of visible, near IR, and mid-IR. All these wavelengths are equally scattered. This scattering effect is noticeable in haze, smog, and clouds (those with large droplet sizes prior to precipitation events).

2.5.6. Summary. You now have an understanding of where remotely sensed energy comes from, its composition, and what effects the materials it encounters can have on it as it travels from its source, to a target, and back to the sensor. The next section will highlight what information a typical remote sensor actually collects and begin the discussion of how to extract information about the target or surface from the collected data.

2.6. Component 4: Energy Is Detected and Recorded by the Sensor. Earlier sections of this chapter explored the nature of emitted and reflected energy and the interactions that influence the resultant radiation as it traverses from source to target to sensor. This section will address how data is collected by a sensor, the transition of remotely sensed data to a usable product, including an introduction to correcting for radiometric, atmospheric, and geometric effects.

2.6.1. Conversion of the Radiation to Data. Data collected at a sensor are converted from a continuous analog to a digital number (DN). This is a necessary conversion, as electromagnetic waves arrive at the sensor as a continuous stream of radiation. The power of the incoming radiation is sampled at regular time intervals by measuring the voltage created at the sensor. This voltage is converted to a DN, most often as an 8, 16, or 32-bit integer. Table 2.6 contains a list of select bit integer binary scales and their corresponding number of brightness levels. The ranges are derived by exponentially raising the base of 2 by the number of bits.

Table 2.6
DN value ranges for various unsigned integer types

Bit Value	2^x	DNs	DN Range
8	2^8	256	0–255
16	2^{16}	65536	0–1023
32	2^{32}	4294967296	0–4294967295

2.6.2. Diversion on Data Type. DN values for raw remote sensing data are usually integers. Occasionally, data can be expressed as a decimal. The most popular code for representing real numbers (a number that contains a fraction, such as 0.5, which is one-half) is called the Institute of Electrical and Electronics Engineers or IEEE, pronounced I-triple-E, Floating-Point Standard. ASCII text or American Standard Code for Information Interchange text, pronounced ask-ee, is another alternative computing value system. This system is used for text data.

2.6.3. You may need to be aware of the type of data used in an image, particularly when determining the DN in a pixel. For most sensors, the data numbers recorded are not indicative of physical properties and need to be rescaled or calibrated to spectral radiance or spectral reflectance. This process is called radiometric calibration and varies by sensor; specific instructions for converting data numbers to radiance or reflectance can be found in the documentation for individual sensing systems.

2.6.4. Turning Digital Data into Images. Satellite data can be displayed as an image on a computer monitor by an array of pixels, or picture elements, containing DNs. The composition of the image is simply a grid of continuous pixels, known as a raster image (Figure 2.15). The DN of a pixel is the result of the spatial, spectral, and radiometric averaging of reflected/emitted radiation from a given area of ground cover. The DN of a pixel is therefore the average radiance of the surface area the pixel represents, and the value given to the DN is based on the brightness value of the radiation.

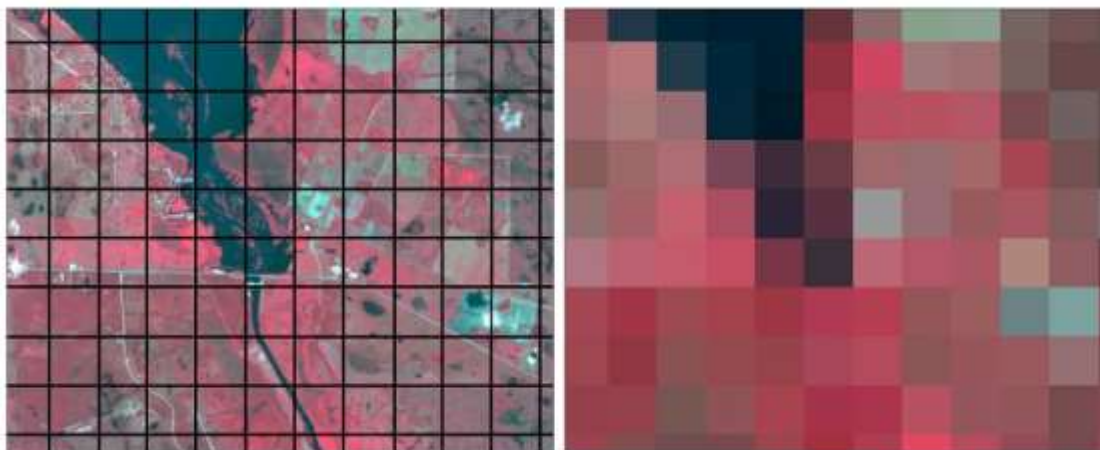


Figure 2.15. This figure simulates the creation of a raster product; the left panel, a high-resolution color-IR image collected over Lake Kissimmee, Florida, simulates a full resolution scene. Black gridlines show the pixel boundaries that will be collected by the sensor. The right panel shows the raster image collected by the sensor. Note that each pixel value in the raster image is a spatial average of the radiance values present in the higher resolution scene.

2.6.5. For most radiation, an 8-bit scale is used that corresponds to a value range of 0–255 (Table 2.6). This means that 256 levels of brightness (DN values are sometimes referred to as brightness values—Bv) can be displayed, each representing the intensity of the reflected/emitted radiation.

2.6.6. On the image this translates to varying shades of grays. A pixel with a brightness value of zero ($Bv = 0$) will appear black; a pixel with a Bv of 255 will appear white (Figure 2.16). All brightness values in the range of $Bv = 1$ to 254 will appear as increasingly brighter shades of gray. In Figure 2.16, the dark regions represent water-dominated pixels, which have low reflectance/Bv, while the bright areas are developed land (agricultural and forested), which has high reflectance.

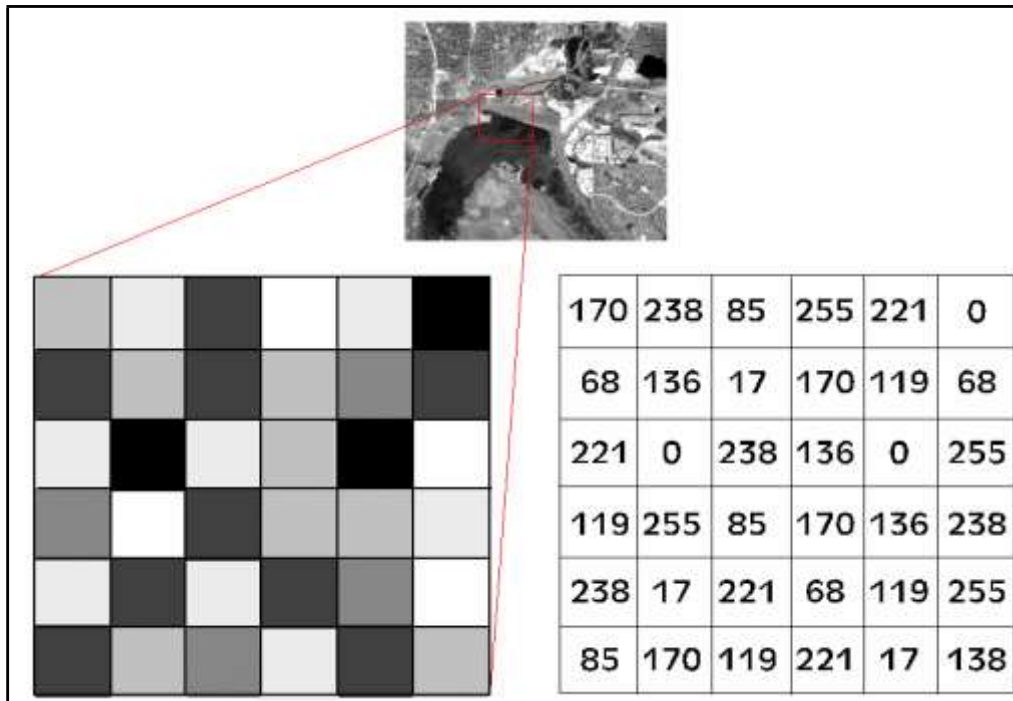


Figure 2.16. Example pixel appearance and data values in an 8-bit unsigned integer, greyscale image

2.6.7. Spectral Radiance. As reflected energy radiates away from an object, it moves in a hemi-spherical path. The sensor measures only a small portion of the reflected radiation—the portion along the path between the object and the sensor. This measured radiance is known as the spectral radiance (Equation 2.8).

$$I = \text{Reflected radiance} + \text{Emitted radiance} \quad (\text{Equation 2.8})$$

where

I = radiant intensity in watts per steradian (W sr^{-1}).

The steradian is the international unit of solid angle, the three-dimensional equivalent to the radian. The energy sampled by the sensor across this angle corresponds to a single pixel in the output. Spectral reflectance can be calculated from spectral radiance by normalizing the radiance measurement with the power of the incident radiation. During this process, geometric and atmospheric affects may need to be accounted for.

2.6.8. Atmospheric Correction Techniques. Data can be corrected by resampling with the use of image processing software such as ERDAS Imagine or ENVI, or by the use of specialty software. In many of the image processing software packages, atmospheric correction models are included as a component of an import process. Also, data may have some corrections applied by the vendor. When acquiring data, it is important to be aware of any corrections that may have

been applied to the data (see Chapter 4). Correction models can be mathematically or empirically derived.

2.6.8.1. Empirical Modeling Corrections.

a. Measured or empirical data collected on the ground at the time the sensor passes overhead allows for a comparison between ground spectral reflectance measurements and sensor radiation reflectance measurements. Typical data collection includes spectral measurements of selected objects within a scene as well as a sampling of the atmospheric properties that prevailed during sensor acquisition. The empirical data are then compared with image data to interpolate an appropriate correction.

b. Empirical corrections have many limitations, including cost, spectral equipment availability, site accessibility, and advanced preparation. It is critical to time the field spectral data collection to coincide with the same day and time that the satellite collects radiation data. This requires knowledge of the satellite's path and revisit schedule. For archived data, it is impossible to collect the field spectral measurements needed for developing an empirical model that will correct atmospheric error. In such a case, a mathematical model using an estimate of the field parameters must complete the correction.

2.6.8.2. Mathematical Modeling Corrections. Alternatively, corrections that are mathematically derived rely on estimated atmospheric parameters from the scene. These parameters include visibility, humidity, and the percent and type of aerosols present in the atmosphere. Data values or ratios are used to determine the atmospheric parameters. Subsequently, a mathematical model is extracted and applied to the data for re-sampling.

2.6.9. Spectral Reflectance Curves.

2.6.9.1. A surface feature's color can be characterized by its reflectance, the percentage of incoming electromagnetic energy (illumination) it reflects at each wavelength across the electromagnetic spectrum. This is its spectral reflectance curve or spectral signature, and as above, it is an unchanging property of the material. For example, an object such as a leaf may reflect 3% of incoming blue light, 10% of green light, and 3% of red light. The amount of light it reflects depends on the amount and wavelength of incoming illumination, but the percentages are constant.

2.6.9.2. Unfortunately, remote sensing instruments do not record reflectance directly, rather radiance, which is the amount (not the percent) of electromagnetic energy received in selected wavelength bands. A change in illumination, more or less intense Sun for instance, will change the radiance. Spectral signatures are often represented as plots or graphs, with wavelength on the horizontal axis and the reflectance on the vertical axis (Figure 2.17 provides a spectral signature for snow).

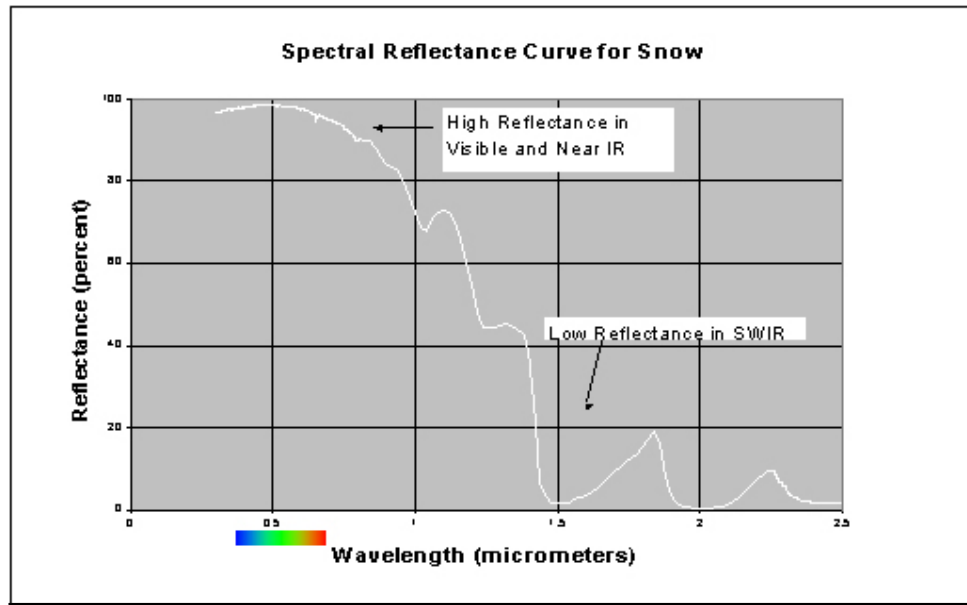


Figure 2.17. Spectral reflectance of snow from Aster Spectral Library (<http://speclib.jpl.nasa.gov/>) data

2.6.9.3. Important Reflectance Curves and Critical Spectral Regions. While there are too many surface types to memorize all their spectral signatures, it is helpful to be familiar with the basic spectral characteristics of green vegetation, soil, and water. This in turn helps determine which regions of the spectrum are most important for distinguishing these surface types.

2.6.9.4. Spectral Reflectance of Green Vegetation. Reflectance of green vegetation (Figure 2.18) is low in the visible portion of the spectrum because of chlorophyll absorption, high in the near IR due to the cell structure of the plant, and lower again in the shortwave IR due to water in the cells. Within the visible portion of the spectrum, there is a local reflectance peak in the green (0.55 μm) between the blue (0.45 μm) and red (0.68 μm) chlorophyll absorption valleys.

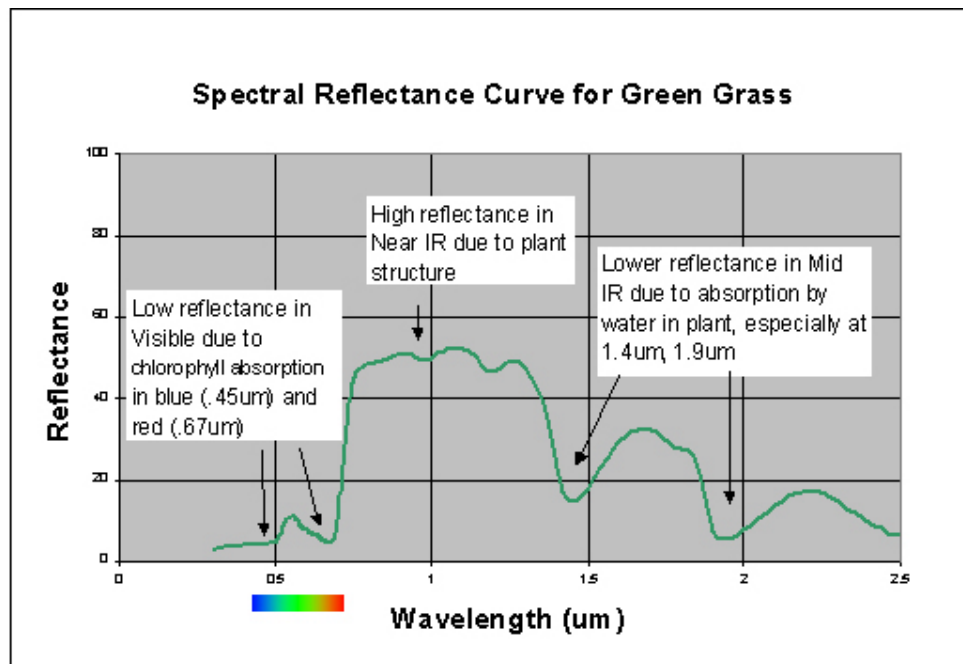


Figure 2.18. Spectral reflectance of healthy vegetation from the Aster Spectral Library (<http://speclib.jpl.nasa.gov/>)

2.6.9.5. Spectral Reflectance of Soil. Soil reflectance (Figure 2.19) typically increases with wavelength in the visible portion of the spectrum and then stays relatively constant in the near-IR and shortwave IR, with some local dips resulting from water absorption at 1.4 and 1.9 μm and resulting from clay absorption at 1.4 and 2.2 μm.

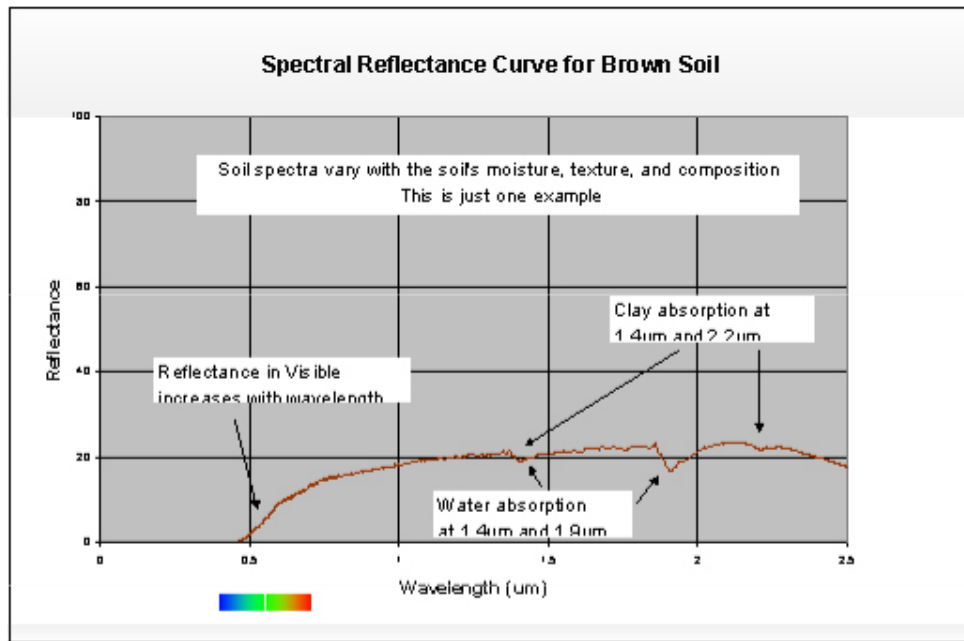


Figure 2.19. Spectral reflectance of one variety of soil using the Aster Spectral Library (<http://speclib.jpl.nasa.gov/>)

2.6.9.6. Spectral Reflectance of Water. Spectral reflectance of clear water is low in all portions of the spectrum (Figure 2.20). Reflectance increases in the visible portion when materials are suspended in water.

2.6.9.7. Critical Spectral Regions.

a. The spectral regions that will be most useful in a remote sensing application depend on the spectral signatures of the surface features to be distinguished. Figure 2.20 shows that the visible blue region is not very useful for separating vegetation, soil, and water surface types, since all three have similar reflectance, but visible red wavelengths separate soil and vegetation. In the near IR (0.7 to 2.5 μm), all three types are distinct, with vegetation high, soil intermediate, and water low in reflectance. In the shortwave IR, water is distinctly low, while vegetation and soil exchange positions across the spectral region.

b. When spectral signatures cross, the spectral regions on either side of the intersection are especially useful. For instance, green vegetation and soil signatures cross at about 0.7 μm , so the 0.6 μm (visible red) and 0.8- μm and larger wavelengths (near IR) regions are of particular interest in separating these types. In general, vegetation studies include near IR and visible red data, water vs. land distinction include near IR or shortwave IR. Water quality studies might include the visible portion of the spectrum to detect suspended materials.

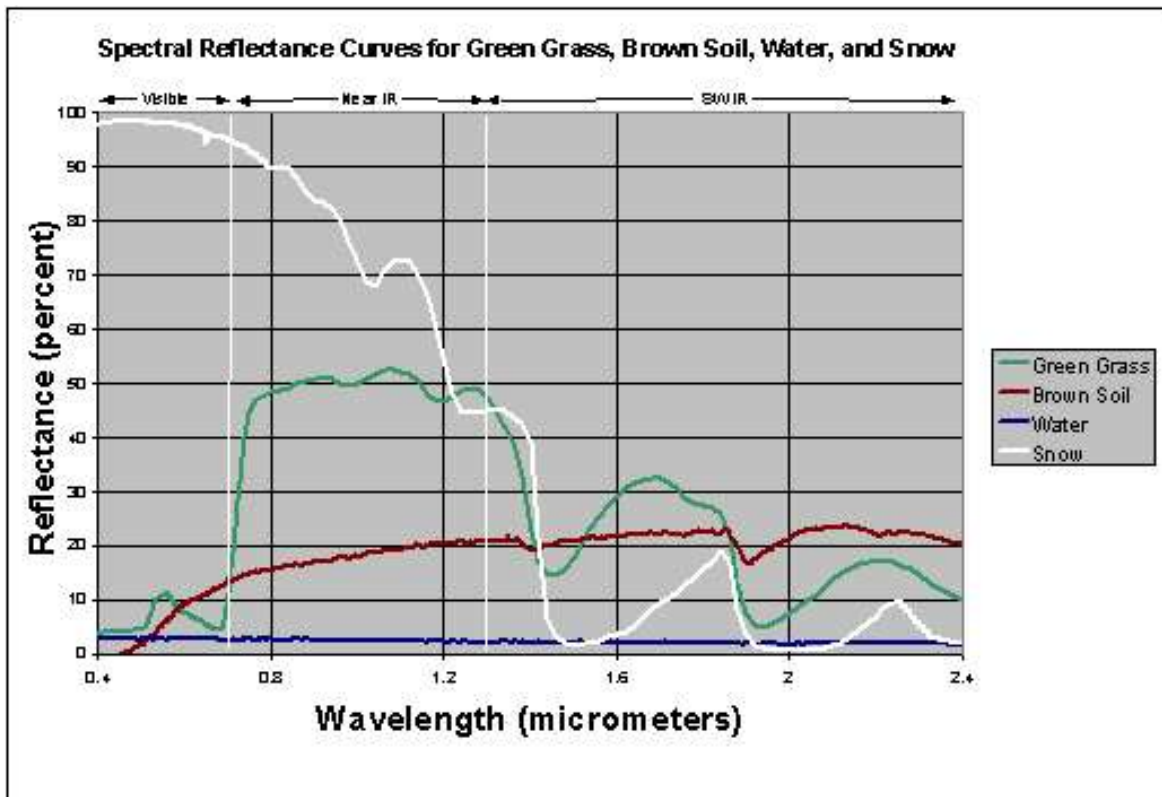


Figure 2.20. Spectral reflectance of grass, soil, and snow using the Aster Spectral Library (<http://speclib.jpl.nasa.gov/>)

2.6.10. Spectral Libraries. As noted above, detailed spectral signatures of known materials are useful in determining whether and in what spectral regions surface features are distinct. Spectral reflectance curves for many materials (especially minerals) are available in existing reference archives (spectral libraries). Data in spectral libraries are gathered under controlled conditions, quality checked, and documented. Since these are reflectance curves, and reflectance is theoretically an unvarying property of a material, the spectra in the spectral libraries should match those of the same materials at other times or places.

2.6.10.1. Two major spectral libraries that are freely available online are:

- a. USGS Spectral Library (Kokaly et al., 2017): <https://www.usgs.gov/labs/spec-lab>
- b. ECOSTRESS Spectral Library (formerly the ASTER Spectral Library) (Baldridge et al., 2009; Meerdink et al., 2019): <http://speclib.jpl.nasa.gov/>

2.6.10.2. The ECOSTRESS Spectral Library includes data from three other spectral libraries: Johns Hopkins University, the Jet Propulsion Laboratory, and the USGS.

2.7. Brief History of Remote Sensing. Remote sensing technologies have been built upon by the work of researchers from a variety of disciplines. One must look further than 100 years ago to understand the foundations of this technology; however, the foundations of remote sensing as we use it today started to be developed in the 1960s and have progressed rapidly since then. This advancement has been driven by both the military and commercial sectors in an effort to effectively model and monitor Earth processes.

2.7.1. The Camera.

2.7.1.1. The concept of imaging the Earth's surface has its roots in the development of the camera. While some of the important concepts behind photography were realized as early as 1021 AD, the first camera to assume a recognizable form and produce images on film was developed in 1816. A small aperture allows light reflected from objects to travel into the black box. The light then "exposes" film, positioned in the interior, by activating a chemical emulsion on the film surface.

2.7.1.2. After exposure, the film negative (bright and dark are reversed) can be used to produce a positive print or a visual image of a scene. Since then, photography has advanced significantly, and film cameras have, for the most part, been replaced by digital cameras, which create raster images using 3-band sensors, similar to those housed in satellites. This transition illustrates an important linguistic distinction—a photograph is an image created by a film camera, whereas an image is a pixel representation of a scene.

2.7.2. Aerial Photography. The idea of mounting a camera on platforms above the ground for a "bird's-eye view" came about in the mid-1800s. In the 1800s, there were few objects that flew or hovered above ground. During the United States (U.S.) Civil War, cameras were mounted on balloons to survey battlefield sites. Later, pigeons carrying cameras were employed. The use of balloons and other platforms created geometric problems that were eventually solved by the development of a gyro-stabilized camera mounted on a rocket. This gyro-stabilizer was created by the German scientist Maul and was launched in 1912. Today, aerial platforms continue to be valuable to the remote sensing community because of their high resolution and targeted nature.

2.7.3. First Satellites.

2.7.3.1. The world's first artificial satellite, Sputnik 1, was launched on 4 October 1957 by the Soviet Union. It was not until NASA's meteorological satellite, Television IR Operational Satellite (TIROS)-1 was launched in 1960 that the first satellite images were produced. NASA's first satellite missions involved study of the Earth's weather patterns. TIROS missions launched 10 experimental satellites in the early 1960s in an effort to prepare for a permanent weather bureau satellite system referred to as TOS which stands for TIROS Operating System.

2.7.3.2. Subsequent programs including TIROS-N, Advanced TIROS-N, and the National Oceanic and Atmospheric Administration's D system extended the data record of these early weather satellites through the turn of the century. The first satellite imagery program was the classified CORONA Program, which collected imagery between 1959 and 1972. CORONA was developed as a replacement for the U-2 Aerial Photography Program to reduce the risk of flying

into remote regions of foreign airspace. Imagery from CORONA had 40 m resolution and was declassified in 1995.

2.7.4. Landsat Program.

2.7.4.1. The 1970s brought the introduction of the Landsat series of satellites with the launching of Earth Resources Technology Satellite (also known as Landsat 1) by NASA. The Landsat program was the first attempt to image whole Earth resources, including terrestrial (land-based) and marine resources. Images from the Landsat series allowed for detailed mapping of land masses on a regional and continental scale. Landsat imagery continues to provide a wide variety of information that is highly useful for identifying and monitoring resources, such as fresh water, timberland, and minerals.

2.7.4.2. Landsat imagery is also used to assess hazards such as floods, droughts, forest fires, and pollution. Geographers have used Landsat images to map previously unknown mountain ranges in Antarctica and to map changes in coastlines in remote areas. A notable event in the history of the Landsat program was the addition of the Thematic Mapper on Landsat 4 in 1982. The Thematic Mapper produced 30-meter resolution imagery—a major improvement over the 70-meter imagery available at the time.

2.7.4.3. More importantly, the Thematic Mapper was the first 30-meter sensor in a series of sensors carried on Landsat missions (later versions were the Enhanced Thematic Mapper Plus and the Operational Land Imager), which have maintained a global, 30-meter imagery data set ever since. This data set is currently maintained by the USGS Earth Resources Observation and Science Data Center and is freely available at <http://earthexplorer.usgs.gov>.

2.7.5. MODIS is a sensor housed on two NASA satellites: Aqua and Terra. MODIS is notable because it images the entire planet every day and its data is freely available from NASA's Disturbed Active Archive Centers, searchable at <http://reverb.echo.nasa.gov/reverb>. Because of its global scale and high temporal resolution, MODIS has been used to monitor global processes (at 250 to 500 m resolution) since its launch in 2000, and a vast array of products ranging from sea surface temperature to snow covered area have been developed from its 36 spectral bands. At the time of writing, MODIS is past its design life but its successor has already been launched.

2.7.6. The Visible IR Imaging Radiometer Suite was launched on board the Suomi National Polar-orbiting Partnership satellite in November 2011 and aims to continue the global record established by MODIS.

2.7.7. High Resolution Optical Systems. Advances in commercial satellite imagery have created a huge surge in both the supply and demand of high-resolution multispectral satellite imagery in the last decade. The transition to high resolution commercial systems began with the launches of IKONOS and Quickbird in 1999 and 2001, respectively. These satellites boast resolutions on the order of meters rather than tens of meters and have become finer as time goes on. Worldview 3, which was launched in August 2014, collects multispectral imagery at just over 1 m resolution. Capabilities of individual systems can be found on their vendor's websites. DigitalGlobe, the developer of the Worldview series of satellites, is perhaps the most widely known and contracted image vendor: <https://www.digitalglobe.com>.

2.7.8. Non-Optical Sensing Systems. We have concentrated on optical and multispectral imagers, but many remote sensing systems do not rely on the Sun as the radiation source. There are a variety of active remote sensing systems (e.g., RADAR and LiDAR) that transmit and receive their own signals and have a wide range of applications and platforms associated with them. LiDAR systems are discussed in detail in 0.

2.8. Future of Remote Sensing. The improved availability of satellite images coupled with the ease of image processing has led to numerous and creative applications. Remote sensing has dramatically brought about changes in the methodology associated with studying Earth processes on both regional and global scales. Advancements in sensor resolution, particularly spatial, spectral, and temporal resolution broaden the possible applications of satellite data. Both government agencies around the world and private companies are pushing to meet the demand for reliable and continuous satellite coverage. This includes both technological advances in large satellite systems, like the Worldview series and the development of small or micro-satellites. Planet Labs, NASA, and others are working to develop constellations of small satellites that are able to image the planet daily at high resolution and low cost.

This page intentionally left blank

Chapter 3. Three-Dimensional (3D) Data Acquisition

3.1. Light Detection and Ranging Systems.

3.1.1. Current State of the Art. The text below is an attempt to give a general overview of the significant components that make up an airborne laser scanning system, but is by no means an exhaustive description, and is based upon the work presented in Glennie et al., 2013. The interested reader is encouraged to refer to some recent sources on airborne laser scanning including [Renslow 2012, Shan and Toth 2009, Vosselmann and Mass 2010, Maune and Nayegandhi 2019].

3.1.1.1. Time-of-flight ranging.

a. All current airborne laser scanning systems are based upon time-of-flight laser ranging, where the ranging unit consists of a laser transmitter that emits short pulses of laser light, and an optical receiver that detects backscattered laser radiation. With precise electronics, the round-trip travel time of the light can be measured and directly converted to range: $\Delta t = 2R/c$, where Δt is the round-trip flight time of the laser, R is the range (distance) between emitter/receiver and target, and c is the speed of light in the atmosphere.

b. Once the laser pulse is emitted from the transmitter, its propagation and reflection are governed by the same phenomena discussed in Chapter 2 for visible light sources. Current commercial LiDAR systems almost exclusively use avalanche photodiodes (APD) as their photodetector. The APD converts the incident photon energy into a proportional analog electric current. For so-called discrete return airborne LIDAR systems, the analog signal is then analyzed in real time to extract the peaks from the incident laser light waveform.

3.1.1.2. Full waveform ranging.

a. For simple discrete return systems, as described above, the real-time analysis of the returned energy simply identifies the peak power locations of the return signal, which normally correspond to the hard targets illuminated by the laser. However, recent technological advancements allow the recording of the entire echo of the backscattered illumination at significantly higher sampling rates (1 to 2 GHz), resulting in a sampled waveform of the entire backscattered illumination (i.e., full waveform LiDAR or (FWL)) (Figure 3.1).

b. FWL provides a new ability to enhance pulse peak detection through post-processing, and further quantify additional information about the imaged scene by parametric and volumetric analysis of the sampled backscattered illumination. While the acquisition of FWL return information can provide additional information, it should also be noted that the processing time required to convert these waveform signatures into usable information is currently quite time prohibitive.

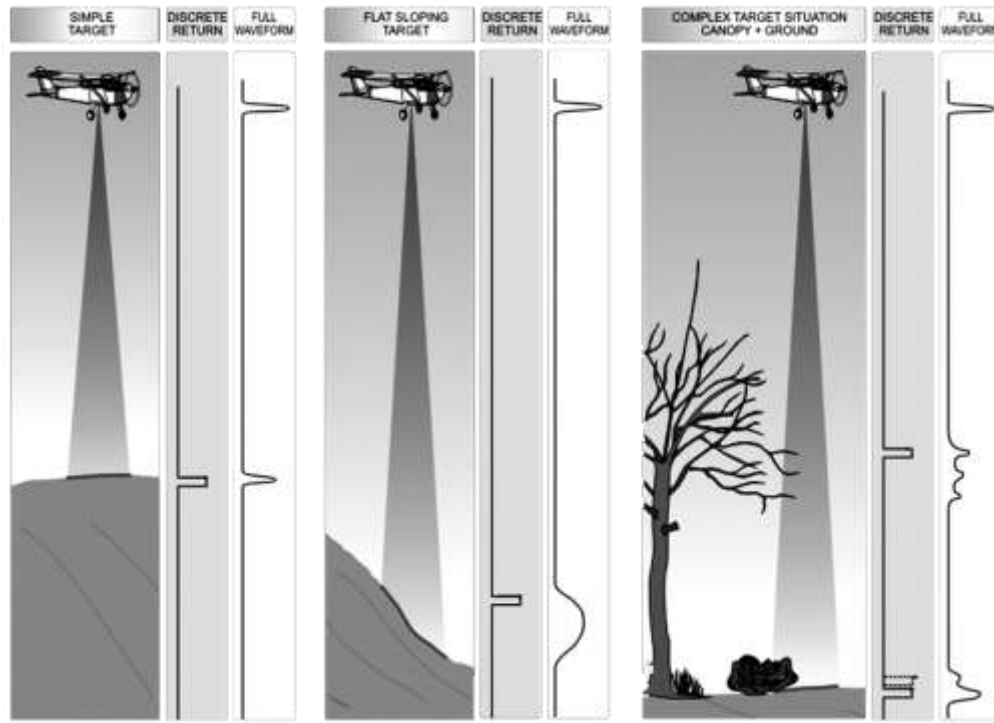


Figure 3.1. Graphical representation of discrete return and full waveform airborne laser measurements for different target situations. The target is illuminated with a short laser pulse, and when the pulse interacts diffusely with a target, a fraction of the signal is reflected back to the instrument. This complexity is well characterized using a full waveform system, whereas a discrete return system often fails to detect all surfaces in complex or cluttered target environments.

3.1.1.3. Single photon sensitivity.

a. Traditional discrete return and FWL systems rely on the return light energy having a high signal-to-noise ratio so that the detector is easily able to measure a proportion of the number of returning light photons—typically thousands of photons are required. This is not the most efficient use of the light energy, and as a result, the power required to run the lasers is high and the standoff distance for collection is relatively limited.

b. However, recent developments have brought new LiDAR systems that employ sensitive light detection technologies and fast-timing electronics. These systems are based upon low energy, short pulse lasers, and sensitive photon-counting detector arrays, which are able to measure very low levels of reflected active radiation—often down to the level of a single photon. These single photon systems are able to collect observations from higher elevations, and therefore are efficient at capturing large swaths of data in a limited amount of time.

c. This efficiency does come at a cost, however. Because the detectors being used are extremely sensitive, they are also significantly noisier and subject to false returns from scattered light from the Sun, for example. Therefore, the resultant range observations from a single

photon-sensitive system requires additional denoising steps to extract target returns from background noise. Currently, there are two competing modes for single photon systems: (a) Geiger mode detectors, and (b) single photon-sensitive systems.

d. Geiger mode systems use detectors that operate as a binary detection system; either they sense light return or they don't. These detectors therefore do not directly provide intensity of the return signal. These detectors also generally have longer reset times, meaning that only one return is detected per outgoing pulse. As a result, they also tend to require areas with complex structure (e.g., vegetation) to be sampled multiple times in order to increase the probability of detecting both the tree canopy and the ground beneath it.

e. To enable oversampling, multiple detectors in an array (like a digital camera) are used to detect returns. A large outgoing laser beam footprint is used to illuminate the field of view of the detector array, and each individual pixel in the array measures an independent range to the targets of interest (Figure 3.2). Geiger mode systems are used commercially by Harris Corporation, and have been used in the DoD-developed systems Airborne Ladar Imaging Research Testbed and MACHETE.

f. Single photon-sensitive systems do not operate as a binary detector, but rather use devices (either photomultiplier tubes or silicon photomultipliers) that are sensitive down to the level of a few photons. The primary difference between these systems and Geiger mode sensors is that photomultipliers do not have long reset times, and are therefore able to generate multiple returns per outgoing laser pulse. As a result, their requirements for oversampling in complex structure is not as high, and current systems use a smaller array of detectors than that of Geiger Mode systems. The Leica SPL100 and the Advanced Topographic Laser Altimeter System (ATLAS) system on the IceSat-2 satellite (see section 3.1.1.7.d) are examples of single photon-sensitive ranging devices.

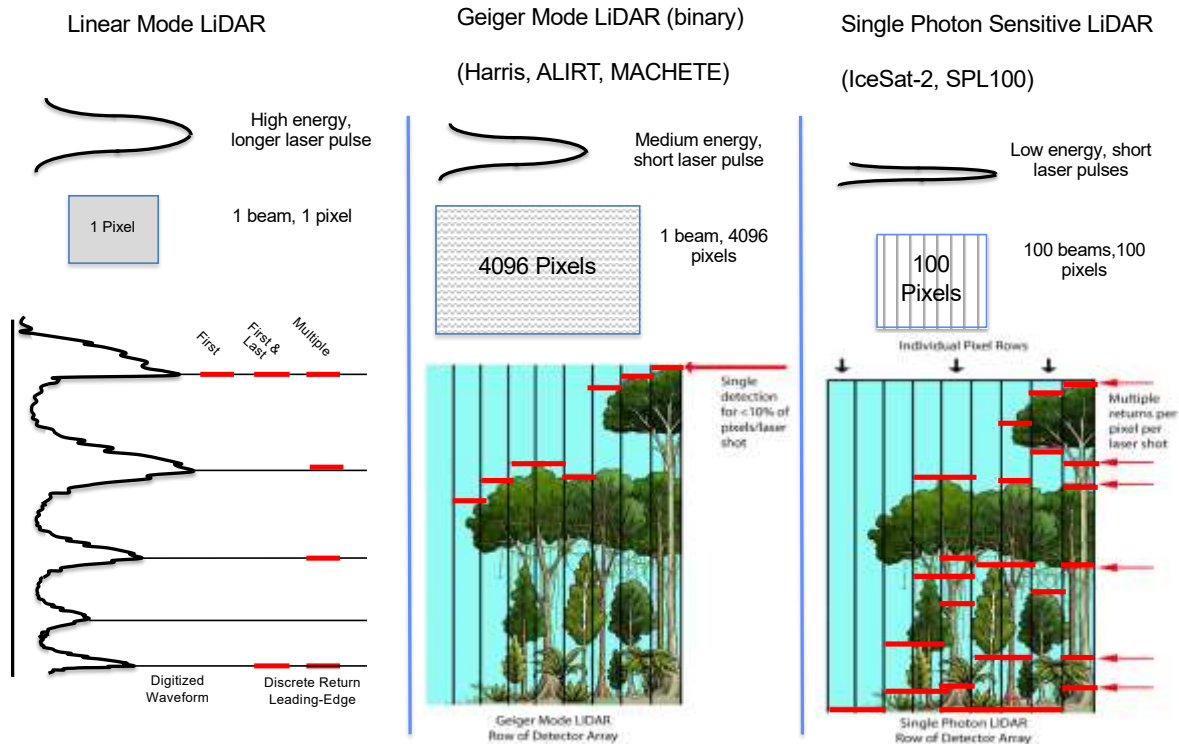


Figure 3.2. Comparison of traditional LiDAR (left) with single photon-sensitive detection LiDAR (left two images)

3.1.1.4. Scanning systems. The collection of a three-dimensional surface requires that the LiDAR system has a mechanism to steer the single laser beam in two dimensions across the surface of the object. For an airborne system, one direction of scanning motion is provided by the forward motion of the aircraft. The second dimension must be accomplished using a mechanical motion, which is usually implemented by the use of a scanning mirror. There are a number of possibilities for scanning mirrors, but the most common for airborne LiDAR systems are the oscillating mirror, the rotating polygon, and the risley prism, which are graphically depicted in Figure 3.3.

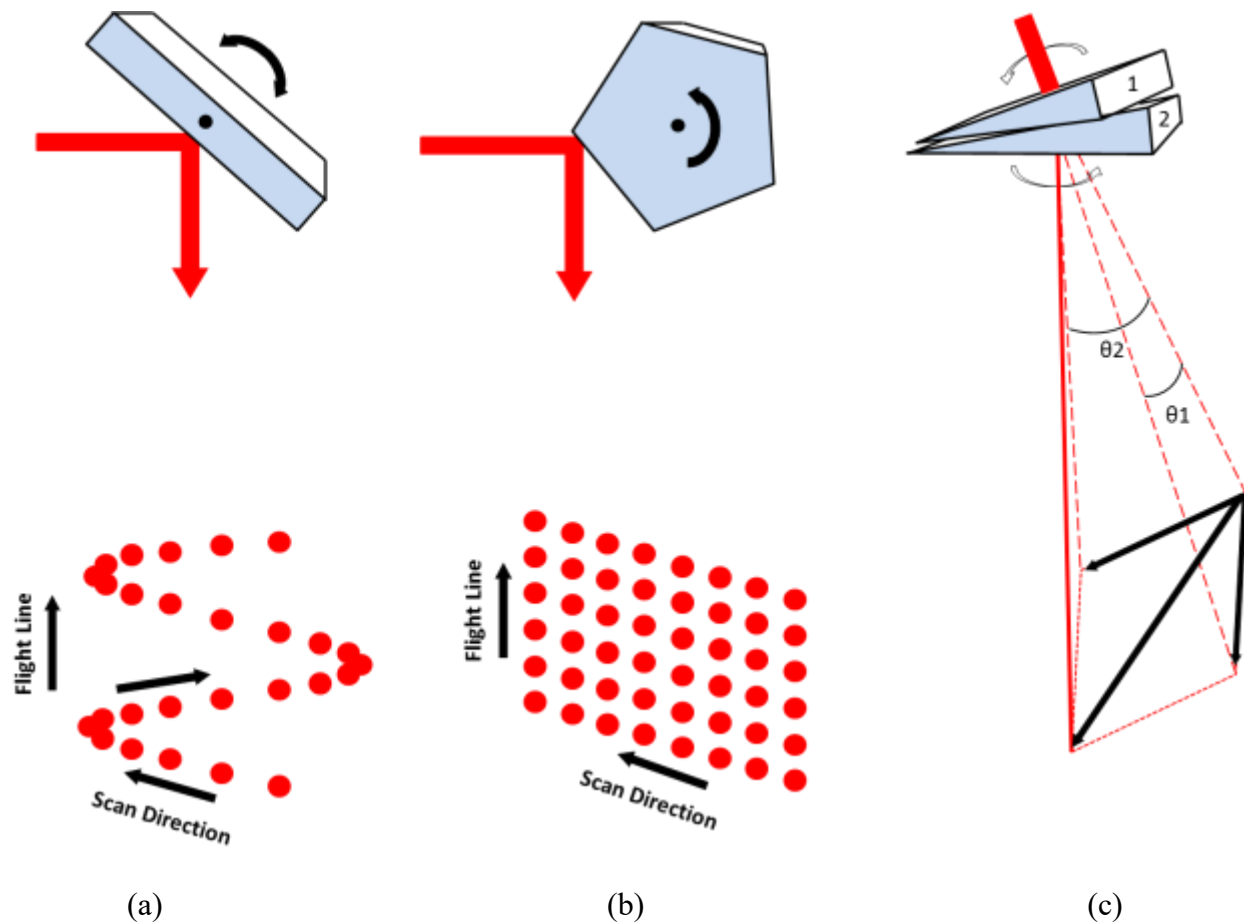


Figure 3.3. (a) Oscillating Scanning Mirror (b) Rotating Polygon Scanning Mirror (c) Refractive Scanner; the sketch shows how two inline prisms can be used to redirect a laser beam by varying the direction

3.1.1.5. Enabling technology [Global Navigation Satellite Systems/Inertial Navigation Systems (GNSS/INS)].

a. For kinematic LiDAR, the laser scanning mechanism is continually moving during data acquisition; therefore, to render a 3D point cloud from the LiDAR observations, the global position and orientation (attitude) of the laser scanning system must be known at all times (6 degrees of freedom). The process of estimating the position and attitude of a remote sensing platform is commonly referred to as direct georeferencing and is enabled through a combination of GNSS/INS, and Inertial Measurement Unit (IMU) technology.

b. An IMU consisting of three orthogonal accelerometers and three orthogonal gyroscopes, when coupled with high rate (1 Hz or greater) GNSS/INS, is capable of providing full estimates of 6 degrees of freedom motion at data rates of 100 to 2000Hz. This data rate is still significantly lower than that of the laser scanner (0.1 to 1.0 MHz), and therefore the trajectory must be interpolated to determine airframe position and attitude for every emitted laser pulse.

Typical aircraft dynamic motion has a frequency of 6 to 10 Hz, and as a result, simple linear or spline interpolation of the trajectory is normally sufficient.

3.1.1.6. Bathymetric LiDAR.

a. A majority of commercially available LiDAR systems use near IR laser sources. While these lasers provide excellent observations over terrain, vegetation, snow, and ice, they are not able to penetrate water. As a result, bathymetric LiDAR systems are specialized sensors that use lasers in the visible spectrum that are capable of penetrating shallow water. The most common wavelength for bathymetric LiDAR is 532 nm, which is in the green portion of the visible spectrum. Green lasers are able to penetrate water to provide benthic layer mapping and subsurface obstacle detection.

b. Because the green laser used for bathymetry is still a light source, the depth that it can measure is highly dependent upon the clarity of the water being observed. There are a number of methods to describe water clarity (or turbidity), with the most common being K_d , the diffuse attenuation coefficient of the water. Most bathymetric systems are able to measure to a depth of 2 to 3 K_d . In even the most clear water, however, maximum depths are generally limited to 50 to 60 meters because of power absorption and scattering from the water column.

c. The processing and point cloud acquisition from bathymetric LiDAR systems are significantly more complex than that of topographic systems. This is because the LiDAR pulse is both refracted and slowed down by travel through the water. As a result, bathymetric processing requires determination of the air-water interface so that the return pulses can be corrected for the change in the speed of light and the bending of the laser beam at the water surface. Because of this more complex geometry, full waveform systems are often utilized to enable more accurate bathymetric determination.

3.1.1.7. Data acquisition discussion. There are a number of ways to classify topographic LiDAR observations. One of the more useful methods of dichotomy involves a classification according to the data collection platform.

a. Static Terrestrial. Static terrestrial observations are collected from a stationary laser scanner, typically mounted rigidly to a surveying tripod. This type of acquisition is generally referred to as terrestrial laser scanning (TLS). Because the laser scanner does not move during acquisition, an additional mechanical rotation must be added to the scanner to allow for a full 3D point cloud acquisition. The data collected from a TLS platform has very high resolution with higher accuracy because a GNSS/INS is not required to determine location. However, because the line of sight of the instrument is from the ground, it is normally limited to shorter distances as occlusions in the field of view normally limit long-range observations except barren environments.

b. Airborne. Airborne scanning affixes the laser scanner and accessories (e.g., GNSS/INS) to either a fixed wing aircraft or a helicopter platform with the instrument normally scanning in a nadir direction. Data is normally collected in a “lawnmower-like pattern”. The field of view of the instrument is normally 40 to 80 degrees, and adjacent flight lines are normally overlapped by at least 30 to 50% to accommodate variations in aircraft trajectory and to provide multiple observations of the same topography. Note that for the purposes of acquisition, the use of an

unmanned aerial vehicle is also considered an airborne collection (Table 3.1).

Table 3.1

Typical flight characteristics and point density. Both linear and single photon systems

	Unmanned Aerial Vehicle	Helicopter	Fixed Wing: Linear Mode System	Fixed Wing: Single Photon- Sensitive System
Flight Altitude (AGL)	20–400	50–1,500	1,000–7,500	5,000–25,000
Flight Speed (knots)	0–87	0–50	100–200	150–300
Point Density	>100	50–100	4–25	4–10
Project Size (km²)	< 5	< 200	50–unlimited	500–unlimited

c. Mobile.

(1) The principles behind mobile laser scanning (MLS) are in practice very similar to that of an airborne system. The acquisition platform (e.g., passenger vehicle, boat) is still assumed to be moving, as in the case of airborne acquisitions, the laser scanner must be rigidly mounted with a high-precision GNSS/INS system for determining laser system position and orientation during acquisition. In general, MLS is used predominantly for corridor projects (e.g., highways and railways), where airborne collection would not be cost effective.

(2) MLS is also required where the primary features of interest are vertical objects that cannot be efficiently scanned from an airborne nadir-looking platform. Examples would be building facades and infrastructure in urban environments. Because of the normally limited range of MLS systems, point densities can be as high as thousands of points per square meter, especially near the acquisition platform.

(3) There are a couple of unique challenges with MLS. First, because the objects of interest tend to be all around the platform, a laser scanner with a large field of view (usually 360 degrees) is often required. Secondly, because collection usually occurs in areas that cause occlusions for GNSS/INS positioning (such as under tree canopy, in tunnels, or in urban environments), the determination of an accurate vehicle trajectory is a significant challenge with MLS processing.

d. Space-Based. Space-based LiDAR observations provide their own set of technical challenges. Ranging distance for space-based LiDAR is >100 km, and therefore, fairly powerful lasers and low signal detectors are required for observations. Currently, there are two space-based LiDAR missions being supported. The first is the ATLAS sensor on the IceSat-2 satellite, and the second is the Global Ecosystem Dynamics Investigation (GEDI) sensor that is attached to the International Space Station. Details on instrument specifications and mission objectives

are briefly summarized below. Currently, these space-based systems are only used for collecting profiles.

(1) The GEDI laser provides laser ranging profile observations of the Earth's forests and topography. The primary goal of the mission is to provide global vegetation heights to advance understanding of carbon and water cycle processes, biodiversity, and habitat. GEDI was commissioned on the International Space Station on March 25, 2019, and has a planned 2-year mission duration.

(2) GEDI contains three lasers at 1064 nm, which produce 8 profile beams spaced ~600 meters apart. Each laser pulses 242 times a second, collecting a point every 60 m on the ground track with an approximate footprint diameter of 25 m. The GEDI sensor is a linear mode system, and full waveform records are recorded for each of the profile beams. See <https://gedi.umd.edu/> for more details.

(3) ATLAS is the primary instrument onboard ICESat-2 (Ice, Cloud, and Land Elevation Satellite-2). The primary goal of the ICESat-2 mission is to measure the height of a changing Earth, with a particular focus on changes in the cryosphere in a warming climate. ICESat-2 was launched in September 2018 and has a design operational life of 3 years.

(4) ATLAS contains a single laser (plus a spare) at 532 nm, which produces 6 laser profiles (in three pairs). The pairs are separated by ~3 km, and the beams in each pair are 90 m apart. The laser pulse rate is 10 kHz, and results in a sample every 0.7 m along track with a footprint size of 13 m. The profile is highly oversampled because ATLAS uses a single photon-sensitive detector and therefore the dense samples are needed to overcome noise. See Neumann et al., 2019 for more details on IceSat-2. Note that since IceSat-2 uses a green laser, it is also capable of producing shallow water bathymetric estimates.

3.1.2. Representative LiDAR Products.

3.1.2.1. The point cloud produced by a LiDAR system includes returns from all objects within the field of view of the laser scanner. The resultant point cloud does not have any point identification (or classification) assigned to each individual point. As a result, automated and manual filtering routines are usually applied in software in order to estimate the type of surface that the laser point was returned from. In a majority of applications, the most basic filtering process separates the LiDAR point cloud into ground and non-ground features.

3.1.2.2. The separation of the dataset into ground and non-ground returns allows the generation of digital terrain models (DTMs) of the ground surface, and digital elevation models (DEMs) of the so-called unclassified datasets. An example of a DTM and DEM, displayed as a hillshade model is shown in Figure 3.4. The difference between the DTM and DEM surface is also commonly delivered as a point cloud product to display object height above ground. As an example, a model of tree height calculated as the difference between surfaces is given in Figure 3.5.

3.1.2.3. Some applications of LiDAR point clouds can require additional classification beyond the simple separation into ground and non-ground returns displayed in Figures 3.4 and 3.5. In these specialized instances, additional classification can be applied to the non-ground

points to extract additional features such as the transmission line and towers as illustrated in Figure 3.6.

3.1.2.4. Finally, in addition to location data, most modern LiDAR scanning systems also record a measure of the relative backscatter of the backscattered laser illumination from the target. This quantity is normally referred to as the laser intensity. In general, the scale and resolution of these intensity measurements varies between LiDAR scanners, but for a single scan, the variations give information about the relative reflectance of the scanned objects at the laser wavelength. An example of LiDAR intensity, rasterized into an image format is given in Figure 3.7.

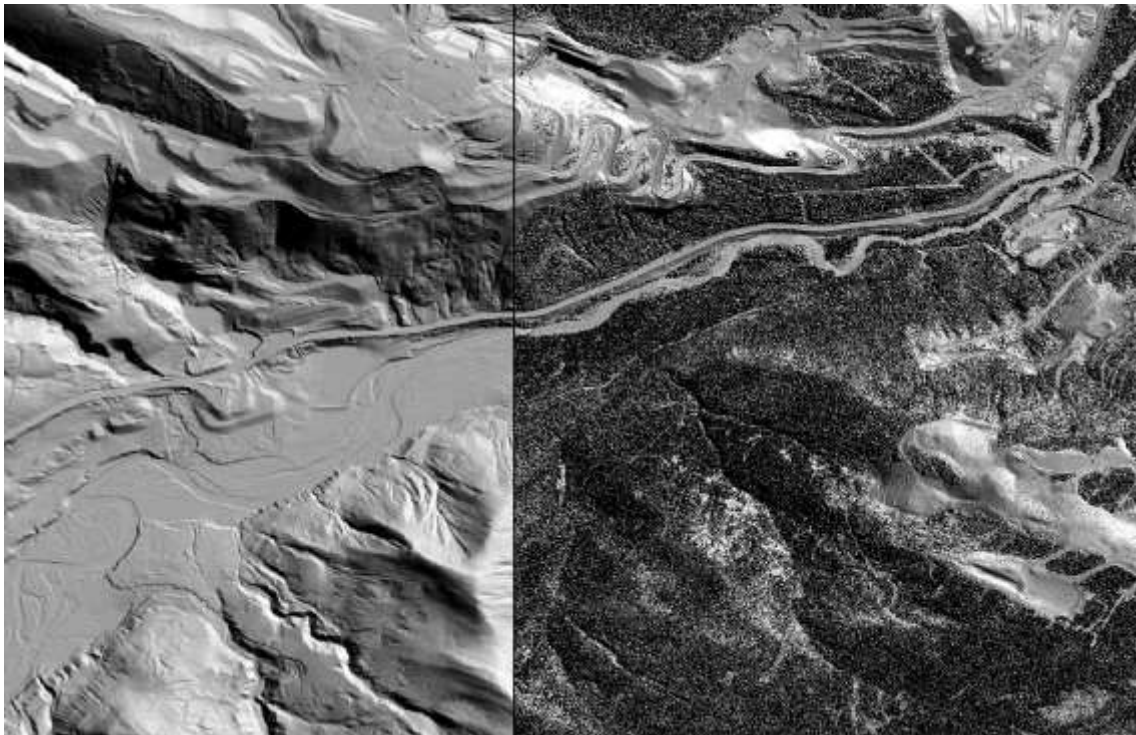


Figure 3.4. Hillshade Image of LiDAR point cloud showing bare earth filtered DTM on the left, and unclassified DEM on the right

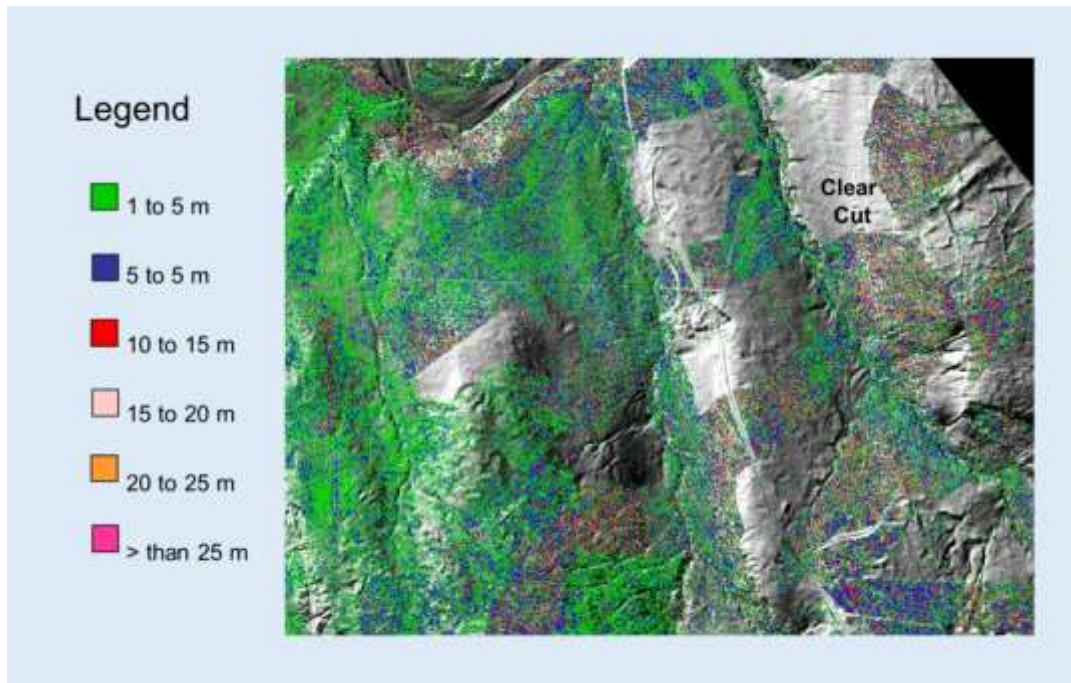


Figure 3.5. Height of Tree Canopy (color scale) Derived from Difference between DTM and DEM for Study Area

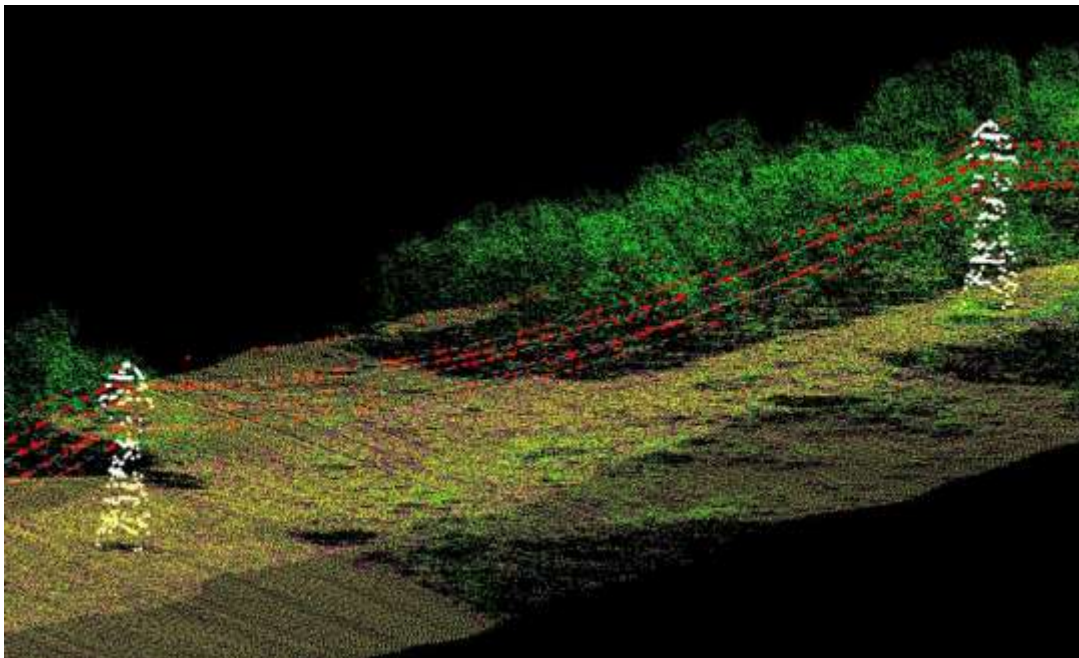


Figure 3.6. Additional Classification of the Point Cloud Beyond Ground and Non-Ground Returns to Include Transmission Towers and Transmission Wires



Figure 3.7. LiDAR Intensity Map of University of Houston Campus

3.2. Structure from Motion.

3.2.1. Principles of photogrammetry. The formation of a digital image is the projection of a 3D scene onto a 2D plane, which results in the loss of depth information; the 3D location of a specific image point can only be constrained to be along a line of sight, and therefore you cannot determine its depth along the line from a single image. However, if two images of the same scene are available, then the position of an object in 3D can be found as the intersection of the two projection rays: one from each photograph using a process called triangulation.

3.2.2. The key for triangulation is the relationship between multiple views which convey the information that corresponding sets of points must contain some structure and that this structure is related to the poses and the calibration of the camera. This geometry is conceptually illustrated in Figure 3.88. Therefore, if common points can be identified in overlapping images, these can be used to both solve for the pose of the camera (position and orientation), and for the 3D coordinates of these common points on the ground. This process is commonly referred to as photogrammetry. More details on the photogrammetric process can be found in [Luhmann et al. 2013, Wolf et al. 2014].

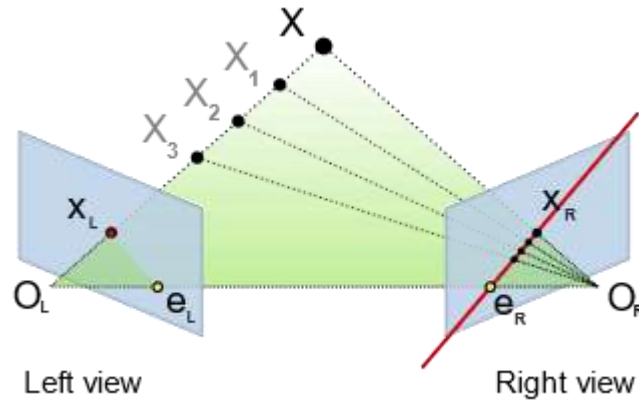


Figure 3.8. With only the left image, point X could be at any location (X₁, X₂, X₃...) along line. Right view allows determination of exact 3D location of X.

3.2.3. From photogrammetry to structure from motion.

3.2.3.1. Photogrammetric processes to determine 3D coordinates from overlapping images have been around since the first days of aerial photography from balloons. However, the use of photography for rendering dense 3D models has only recently become commonplace. There are two principal reasons for this: (a) computing power for high resolution mapping and modeling has only recently been available, and (b) automated image matching techniques were not available. With recent increases in computing power, the first limitation has been removed. The second limitation has been overcome by a series of automated algorithms that automatically detect unique features in an image and then match these unique features between sets of images, providing the automated correspondence required to determine both camera pose and 3D location of points in the images.

3.2.3.2. There are a variety of common image point matching algorithms, with the most widely used being SIFT (Scale Invariant Feature Transform). The automated matching of common features between sets of images using algorithms such as SIFT enables the generation of dense 3D models from overlapping images. There are now a number of open source and commercial software packages capable of performing structure from motion calculations. Density of the final point clouds are normally at or near the pixel size of the input imagery (i.e., for 1 meter pixel photography, the resultant point cloud would have approximately 1 meter point spacing). The processing of using automated image matching software to generate dense point clouds is most accurately referred to as structure from motion with multi-view stereo (SFM-MVS), although the entire process is sometime referred to as SFM.

3.2.4. Processing software packages. With the recent explosion in the use of SFM-MVS techniques for deriving 3D models, there has also been the emergence of many software packages, both open source and commercial for the creation of 3D models for overlapping photographs. While not an exhaustive list of possibilities, the products below are most commonly used in Earth surface mapping applications.

3.2.4.1. Open Source Options.

a. AMES Stereo Pipeline: <https://ti.arc.nasa.gov/tech/asr/groups/intelligent-robotics/ngt/stereo/>

b. MicMac: <https://micmac.engg.eu>

c. OpenSfM: <https://www.opensfm.org/>

3.2.4.2. Commercial Products.

a. Agisoft Photoscan: <https://www.agisoft.com/>

b. Pix4D : <https://www.pix4d.com>

c. Bentley ContextCapture: <https://www.bentley.com/en/products/brands/contextcapture>

3.2.4.3. The majority of first time Unmanned Aircraft Systems (commonly known as “UAS”) users normally will choose either Agisoft Photoscan or Pix4D for their initial testing and model generation.

3.2.4.4. An example point cloud, created using SFM-MVS on high resolution (10 cm pixel resolution) airborne image is given below in Figure 3.99. The figure shows a colorized point cloud in an oblique view. Note that the SFM process does very well modeling hard surfaces (e.g., pavement, rooftops), but does not perform as well in vegetation. The SFM process requires that at least two photographs image the exact same spot, but from different viewpoints. This is difficult in vegetation, and as a result, SFM provides very little mapping under a tree canopy; in areas of vegetation, the SFM 3D model primarily only maps the top of the tree canopy or vegetation. This is an important consideration for vegetated areas, because a majority of applications are more interested in a terrain model.



Figure 3.9. Visualization of Colorized Point Cloud Created Using Bentley ContextCapture

3.2.5. Point Cloud Processing Software. The following is not meant to be an exhaustive list, but rather a sampling of some of the more commonly used packages within the academic, DoD, and commercial sectors.

3.2.5.1. Open Source Options.

a. The Point Data Abstraction Library (PDAL), which is more commonly referred to by its acronym PDAL. PDAL is a software library that has been open source since its inception in 2011, and provides a standalone application for point cloud processing, a C++ library for development of new point cloud applications, and bindings to both MATLAB and Python. Central to PDAL are the concepts of stages, which implement core capabilities for reading, writing, and filtering point cloud data and pipelines, which are end-to-end workflows for transforming point clouds. PDAL can be used to automate tasks such as generating a digital terrain model, removing noise, classifying data, and reprojecting between coordinate systems (www.pdal.io).

b. CloudCompare: CloudCompare is a 3D point cloud (and triangular mesh) processing and visualization software. It was originally designed for performing comparisons between two dense point clouds. It has also been extended to include many algorithms for manipulating point clouds including registration, resampling, statistical computations, and segmentation (www.danielgm.net/cc/).

3.2.5.2. Commercial Options. All of the products listed below provide software for managing and processing large volumes of LiDAR point clouds, including classification, visualization, and final product (e.g., DTM and DEM) generation.

a. QT Modeler: A stand-alone software package with wide use across the DoD (www.appliedimagery.com).

b. Terrascan: A processing and production software package utilized by most commercial firms offering ALS and MLS services. Software runs as a plug-in to Bentley Microstation (www.terrasolid.com).

c. LP360: This runs as a plug-in to ArcGIS and is utilized mainly by engineering and design firms using airborne laser scanning (www.geocue.com/products/lp-360).

Chapter 4.

Processing Geospatial Data

4.1. Introduction. Image processing in the context of remote sensing refers to the management of digital images, usually satellite or digital aerial photographs. Image processing includes the display, analysis, and manipulation of digital image computer files. The derived product is typically an enhanced image or a map with accompanying statistics and metadata. An image analyst relies on knowledge in the physical and natural sciences for aerial view interpretation combined with the knowledge of the nature of the digital data (see Chapter 2). This chapter will explore the basic methods employed in image processing. Many of these processes rely on concepts included in the fields of geography, physical sciences, and analytical statistics.

4.2. Image Processing Software.

4.2.1. Imaging software facilitates the processing of digital images and allows for the manipulation of vast amounts of data. There are numerous software programs available for image processing and image correction (atmospheric and geometric corrections). USACE has an enterprise license for ESRI's ArcGIS which includes some image processing capabilities. Common commercial processing software suites include ERDAS Imagine, ENVI, QT Modeler (for point cloud data), and GAMMA (for RADAR data). Open source alternatives include QGIS, Geospatial Data Abstraction Library, PDAL, and others.

4.2.2. The various programs available have many similar processing functions. There may be minor differences in the program interface, terminology, metadata files (see below), and types of files it can read (indicated by the file extension). There can be a broad range in cost. Be aware of the hardware requirements and limitations needed for running such programs. An online search for remote sensing software is recommended to acquire pertinent information concerning the individual programs.

4.3. Metadata.

4.3.1. Metadata is ancillary information about the characteristics of the data or “data about data.” It describes important elements concerning the acquisition of the data as well as any post-processing that may have been performed. Metadata comes in many forms, but for image data, metadata is typically found in an accompanying file (often a text file). Metadata files document the source (e.g., sensor platform, sensor, vendor), date and time, projection, precision, accuracy, resolution, radiometric data, and geometric data. It is the responsibility of the vendor and the user to document any changes that have been applied to the data. Without this information, the data could be rendered useless.

4.3.2. Depending on the information needed for a project, the metadata can be an invaluable source of information about the scene. For example, if a project centers on change detection, it will be critical to know the dates and times that the imagery was collected. Numerous agencies have worked toward standardizing the documentation of metadata in an effort to simplify the process for both vendors and users. The USACE follows the Federal Geographic Data Committee standards for metadata (<https://www.fgdc.gov/metadata/csdgm/>). The importance of metadata cannot be overemphasized.

4.4. Viewing the Image. Image files are typically displayed as either a gray scale or a color composite. When loading a gray scale image, the user must choose one band (data set) for display. Color composites allow three bands of wavelengths to be displayed at one time. Depending on the software, users may be able to set a default band/color composite or designate the band/color combination during image loading.

4.5. Band/Color Composite.

4.5.1. Color composites allow you to display three data sets (often three bands in an image) in a single view by mapping the data in each band to one of three colors displayed by your monitor/projector. The most common color composite is “true color” (Figure 4.1a). A true color composite mimics what your eyes would see, so bands corresponding to the wavelengths of red (~700 nm), green (~550 nm), and blue (~400 nm) are shown as red, green, and blue by your display.

4.5.2. Many sensors have more than three bands and have bands that capture data from areas of the electromagnetic spectrum outside what our eyes can see. “False color” composites allow us to have visual combinations of these bands. A common false color composite is Red Green Blue (RGB) = NIR/R/G, also called a “near-IR composite,” like a near IR photograph (Figure 4.1b).

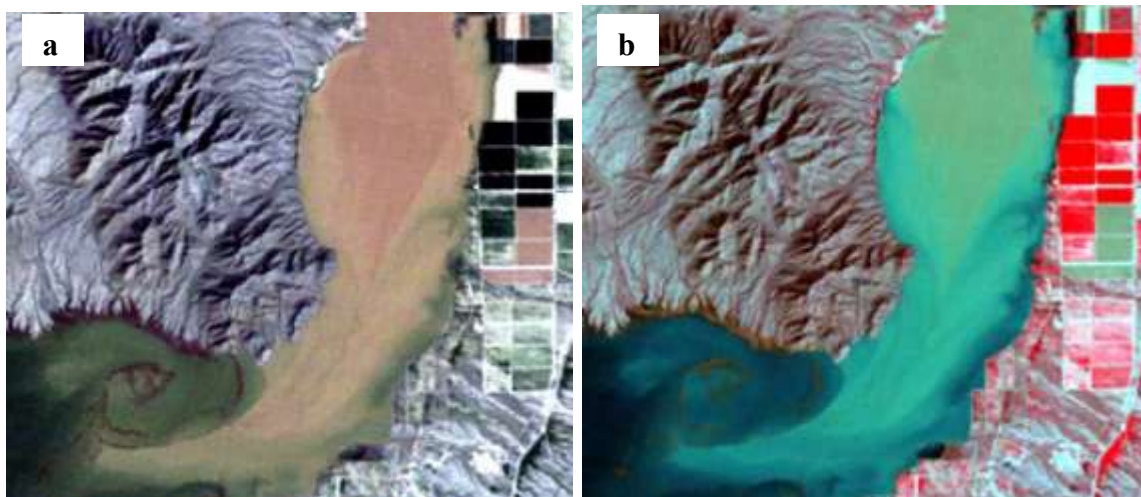


Figure 4.1. Figure 4.1a is a true color composite, where RGB = Red, Green, Blue. This looks similar to how your eyes might perceive it, though it has been stretched to enhance contrast. Figure 4.1b is a false color composite, where RGB = Near IR, Red, Green. This is often called a ‘near IR composite’ and highlights healthy vegetation (in red).

4.5.3. In this combination, a near-IR band (often ~800-850 nm) is shown as red, red (~700 nm) is shown as green, and green (~550 nm) is shown as blue. It is important for interpretation purposes to know what band combinations you are displaying. For example, in this configuration, healthy vegetation appears bright red. This is because high chlorophyll content makes vegetation highly reflective of near-IR light, orders of magnitude more than for either red, green, or blue. In a true color composite, the vegetation would appear green because vegetation

reflects relatively more green light than red or blue. Color composites are an initial way of exploring some of the concepts regarding material spectra discussed in Chapter 2.

4.6. Displaying Imagery: Ellipsoids, Datums, and Projections.

4.6.1. A map projection is the method by which data about Earth's surface (a lumpy, oblate spheroid) is displayed in two dimensions (on a map or your screen, for example). This first requires a description or reference system for Earth, which includes an ellipsoid and a datum.

4.6.2. An ellipsoid is a simple geometric shape that approximates the shape of the planet, defined by its major and minor axes. If Earth had uniform density and a smooth surface, an ellipsoid would provide all the information you'd need to define a two-dimensional reference system. This ellipsoid is the basis of a coordinate reference system; however, because we generally discuss elevation in "height above sea level" rather than "height above the ellipsoid," and sea level is variable across the planet because of heterogeneous mass distribution, we need to establish a reference sea level.

4.6.3. Datums describe the lumpiness or the distribution of the Earth's mass, and therefore provide a crucial vertical component to the (horizontal) reference system. It should be noted that datums often do not describe surface topography, rather distribution of mass at a very large scale, and while they are updated as new gravitational surveys are performed, this is relatively rare (semi-decadal to decadal).

4.6.4. A local datum may include topography depending on the way it was generated and the size of the area surveyed. At this point, the spatial relationship of all the points of the globe is defined and could be described by a geographic coordinate system (latitude relative to the equator, longitude relative to the prime meridian), but to display it on a screen, we need to project it. For a more complete discussion of ellipsoids, datums, and USACE standards regarding them, please consult EM 110-2-6056: Standards and Procedures for Referencing Project Elevation Grades to Nationwide Vertical Datums.

4.6.5. Map projections describe how a three-dimensional surface is displayed in two dimensions. For example, one could make a map of the continental U.S. using a globe and a sheet of paper. First, place the sheet of paper over the center of the U.S. It touches the globe at only one point, the intersection of a plane and a sphere. This point can represent the origin of a coordinate system: 0 meters East, 0 meters North. Next, draw an imaginary line between every point on the globe (in this case, probably just the half closest to the paper), and the sheet of paper, transferring the data from that spot on the globe to the paper.

4.6.6. Now the three-dimensional data is represented on a two-dimensional surface. The data has been projected to a planar projection, as the "developable shape" (the sheet of paper) is a plane. While moving away from the center point, the distance traveled on the globe is farther than the distance travelled on the paper. This results in distortion of the projected image, relative to the globe.

4.6.7. Map distortion is a necessary inconvenience of projecting data. Different projections utilize different developable shapes (such as cones, cylinders), different origin and reference structures (points, parallels, meridians), different units (degrees, meters, radians), and different

target areas (global, continental U.S., polar) to minimize distortion and provide the most appropriate display for a given application. Projections may preserve distance, area, angle, or shape, but cannot perfectly preserve all elements of a surface.

4.6.8. Transformations are the mathematical methods used to convert the geospatial data of one coordinate/projection system to another. Conceptually, this is done by first reversing the previous exercise—converting the map coordinates back to the three-dimensional (or geographic) coordinates—then converting to a new projected system. Most remote sensing software packages include reference systems and transformations (such as those found at <http://spatialreference.org/>) and can transform data on-the-fly, allowing it to be displayed coincidentally with data that may use a different coordinate system. All software packages have the ability to reproject data to a desired reference system and projection.

4.7. Registration and Rectification.

4.7.1. Registration or georegistration is the process of attributing geospatial information to a raw image. This is mostly commonly done using positional data collected at the sensor, sometimes termed “ephemeris data,” using IMU. This information allows the image to be projected and positioned or georegistered. Georegistration can also be accomplished using the image-to-image or image-to-landmark method described below; however, most public and commercial remotely sensed data is provided already georegistered.

4.7.2. Rectification is the process by which an image is warped to more accurately represent known surface characteristics such as elevation or landmarks. Rectification is most commonly used to correct for the effects of relief displacement caused by topography. Relief displacement is the visual perception that taller features (or features with more relief above an arbitrary plane) lean away from the sensor. In imagery this manifests in both subtle and obvious ways. Trees and buildings appear to lean away from the sensor; this distortion is not corrected for, as the goal of rectification is to correctly represent the image location of the ground surface.

4.7.3. Topographic relief also causes relief displacement and is targeted by rectification. Because rectification involves warping an image, essentially stretching pixels or groups of pixels out to fill variable amounts of ground space, it is common to resample the output such that each pixel is square and all pixels are the same size. This ultimately produces an image where each pixel attempts to represent an equal parcel of the ground surface and display data values as if it were viewed from nadir. This end result is called an ortho-image (or an ortho-photo) and the full process is called orthorectification.

4.7.3.1. Image-to-Image Rectification. Remote sensing software packages allow the user to rectify (or register) an image by correlating features in the image to features in another image or map using Ground Control Points (GCPs). This method uses a (variable degree) polynomial model to warp the image such that the user-defined points most closely match in the source and reference image. The success of this method relies on the user choosing appropriate and accurate GCPs. Features used as GCPs often include manmade, ground-level objects with little to no movement over time, such as the foundations of buildings, surveyor landmarks, and intersections of roads. Natural features may also be used, but temporal variability between a source and reference scene can result in error in your rectification.

4.7.3.2. After choosing control points, the user can select what type and what order polynomial is used to warp the image. The appropriate choice varies by application. In general, higher order polynomials can more easily adapt to variable topography but require both more GCPs to use also produce more edge-effects and distortion in areas where GCP density is low. Finding a balance for your application and area of interest is at the user's discretion. Image-to-image rectification utilities will provide tables that show the source coordinate for each of your GCPs, the reference coordinate, and the output (or warped) coordinate. The output coordinate and the reference coordinate differ because the polynomial model cannot perfectly replicate your reference data (unless it had either infinite points or infinite orders).

4.7.3.3. These tables generally include the Root Mean Square Error (RMSE) or the average difference between the reference points and the warped output. Importantly, this is not an expression of the accuracy of your rectification—it is a description of how close the model you chose was able to fit itself to your inputs, using the number of points you provided it with. Large RMSE may result from poorly chosen GCPs, lack of GCP density, inappropriate polynomial or order selected. Refining your rectification so that it is both precise and accurate is an iterative process.

4.7.3.4. Automatic (Rapid Positioning Coefficient-Driven) Rectification.

a. Rapid Polynomial Coefficients (RPCs) are a series of equations that relate image space (or sensor space) and ground space. They are derived from ephemeris data and provide per-pixel positional aids for the appropriate software. RPCs are delivered standard as part of DigitalGlobe's NITF formats and are more commonly being included with other vendor products. Some software suites (like ENVI) can generate RPCs for select satellite/sensor systems.

b. RPCs allow the user to sensitively and accurately orthorectify an image using a DEM. The accuracy of this process is largely dependent on the accuracy and spatial resolution of the DEM used (with highest accuracies occurring when the resolution of the DEM is the same or higher than that of the image). This functionality is notably included (with specific support for NITF imagery) in ArcGIS (in versions after 10.1).

4.8. Resampling. The concept of resampling raster data is important to many of the processes, and in some cases, the individual steps involved in projecting, reprojecting, and rectifying imagery. Resampling is the process of changing a pixel's orientation, size, location, or value.

4.8.1. Pixel orientation. When an image is initially collected, its pixel orientation is usually in line with the direction the sensor was moving. This rarely (if ever) aligns with the standard projections and grids that most users utilize. These data resampled to align with the target coordinate system and grid.

4.8.2. Size. Sometimes you need to change the size of the pixels in an image, this could be to compare it to a different raster or might just be part of a reprojection. For example, a geographic projection (Figure 4.2) might have a pixel that is 1° latitude by 1° longitude. These data could be plotted as square pixels, but because the length of a degree of longitude changes with latitude, the areal extent of a pixel is inherently variable when compared to the ground surface. If converted to an equal-area projection, or a projection where each pixel represents the

same ground area, one of our 1° would end up being represented by a variable number of equal-area pixels after it was resampled.

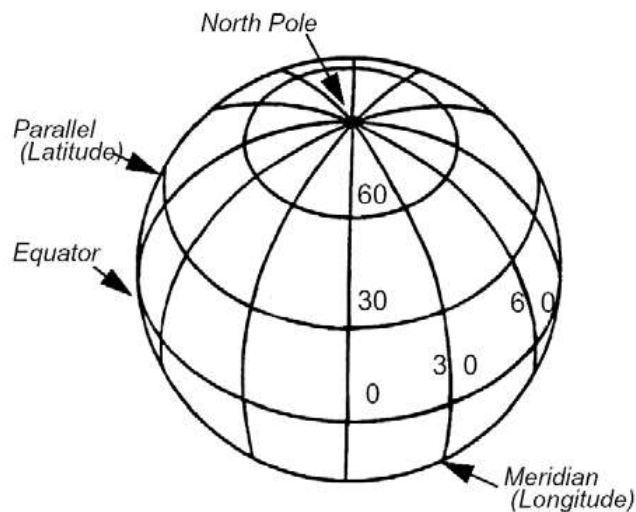


Figure 4.2. Basic elements of a geographic projection

4.8.3. Location. In the example of orthorectification above, sometimes image pixels are not initially represented correctly in space. Resampling is part of the process of moving those pixels to their new locations; this functionality is closely tied to (sometimes) changing pixel values.

4.8.4. Value. When moving a pixel or changing its size or orientation, you inherently change the ground surface that it is representing. In some cases, a pixel in your output may overlap several pixels in your input, and different resampling methods allow you to incorporate that information (or ignore it) in the process to produce the most useful and accurate product.

4.8.5. There are a variety of algorithms available for resampling, but there are three common ones that will be covered here (understanding these will help contextualize others you may encounter): nearest neighbor, bilinear interpolation, and cubic convolution. These each dictate how values in your input are mapped to your output.

4.8.5.1. Nearest neighbor. Nearest neighbor resampling assigns pixel values in your output based on the nearest pixel value in your input (calculated from pixel center to pixel center in Euclidian distance). This method is the fastest and does not change any values (though it may exclude values) that were present in your source data. This is recommended for thematic data sets (where numeric values represent unique classes—for example, land cover type).

4.8.5.2. Bilinear interpolation. Bilinear interpolation computes a spatial weighted averaging of input pixels around the location (usually the nearest four) of the output pixel to determine its value. This is relatively fast and produces an approximation of contributing pixel values in your output product. The average is weighted by Euclidian distance between each of

the four inputs and the single output. The output value will always be within the range of the input values.

4.8.5.3. Cubic convolution. Cubic convolution considers a collection of pixels around your output location (an N by N square), fits a polynomial function to those points, and outputs the value of that function at the location of your output as the value of the output. This can produce values outside the range of inputs.

4.9. Image Enhancement. An advantage of remote sensing data lies in the ability to visually evaluate the data for overall interpretation. A useful visual interpretation may require manipulating how the image data is displayed or what parts of an image are displayed. There are many methods that can be used for image enhancement; we will briefly cover contrast stretching, band arithmetic, spatial filtering, and principal components. The type of enhancement performed will depend on the appearance of the original scene and the goal of the interpretation.

4.9.1. Contrast Stretching. Displaying and interpreting an image is dependent on the distinction between the source pixel value and the display value. The source value is the number stored in the image itself; it could be any many different formats (integer, float) and represent a number of different things (land cover, population, brightness). The display value is the integer value that your display uses to depict the source value; this is the color (or shade of grey) you actually see on your monitor. Let's assume that your monitor displays in 8-bit, unsigned integer color, where 0 is black, 255 is white, and there are three color sources: red, green, and blue. Image data types and ranges vary by sensors, and most sensors are designed to capture a relatively wide range of brightness values (to avoid losing data).

4.9.2. Consider the example in Figure 4.3. The figure shows the histogram of an example image. A histogram is a representation of pixel value distribution within an image—it shows how often a pixel value (x-axis) occurs within the scene (y-axis). In this example, the source pixel values are stored in an 8-bit, unsigned format (0-255), similar to that of your display; however, the values of the pixels in the image only range between 84 and 153. This range only covers about a quarter of the total available values in your display, so it is likely that if you displayed this image using its source values as display values, it would be hard to distinguish between features in the scene, and it might look generally washed out and grey.

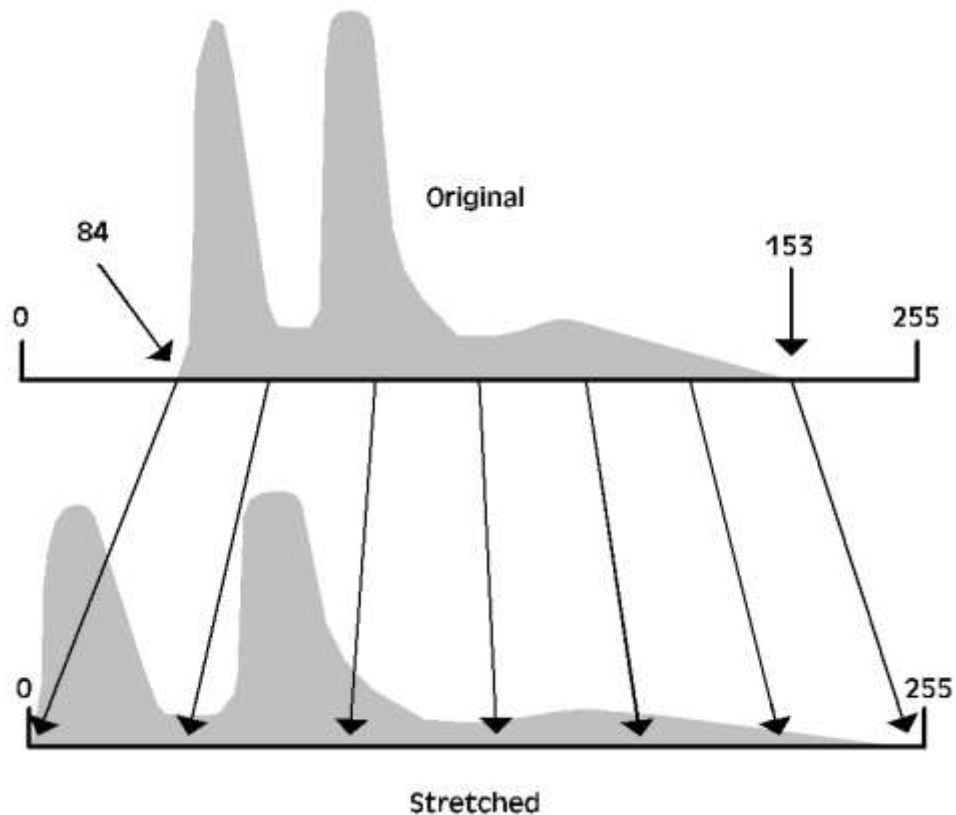


Figure 4.3. A linear stretch involves identifying the minimum and maximum brightness values in the image histogram and applying a transformation to stretch this range to fill the full range across 0 to 255

4.9.3. Figure 4.3 shows the outcome of a linear contrast stretch, reassigning the minimum image value (84) to the minimum display value (0), the maximum image value (153) to the maximum display value (255), and reassigning intermediate values to the range in between using a linear fit. An example of what these respective images might look like can be seen in Figure 4.4. Example histograms for a color display may be seen in Figure 4.5 and Figure 4.6; note that for color displays, the dynamic range or the range between the lowest and highest source values may be different in each band. Many different methods for contrast stretching exist, and most software packages allow you to manually design stretches if you so wish. A few common methods are described below:

4.9.3.1. Linear Stretch (described above). The linear stretch is sometimes referred to as a min-max stretch and involves remapping the lowest value in an image to the lowest value in the display, the highest value in an image to the highest value in the display, and distributing the intermediate values based on a linear fit. This works well for data that does not contain outliers (as outliers will dramatically reduce contrast because they, by definition, fall far from the mean value of the image). Example histograms and imagery shown in Figure 4.5 and Figure 4.6, respectively.

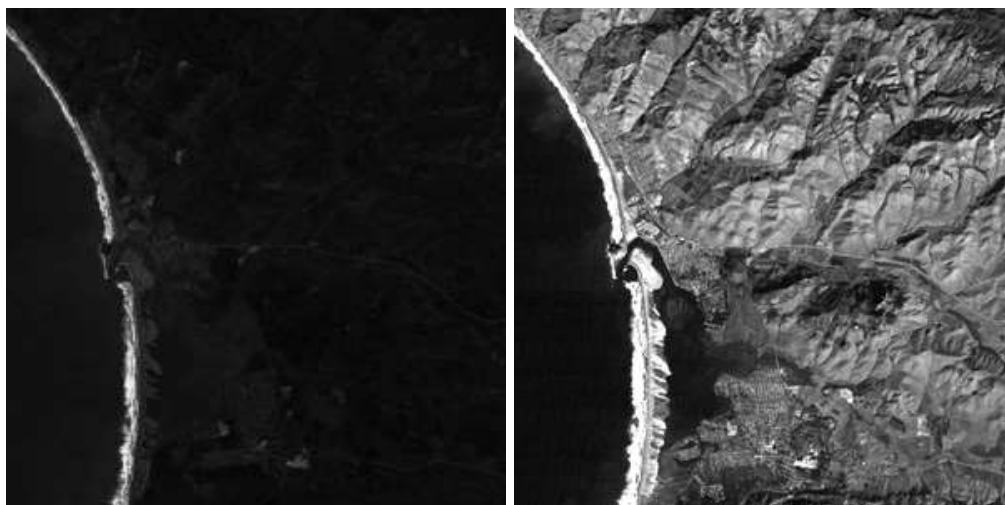


Figure 4.4. Contrast in an image before (left) and after (right) a linear contrast stretch

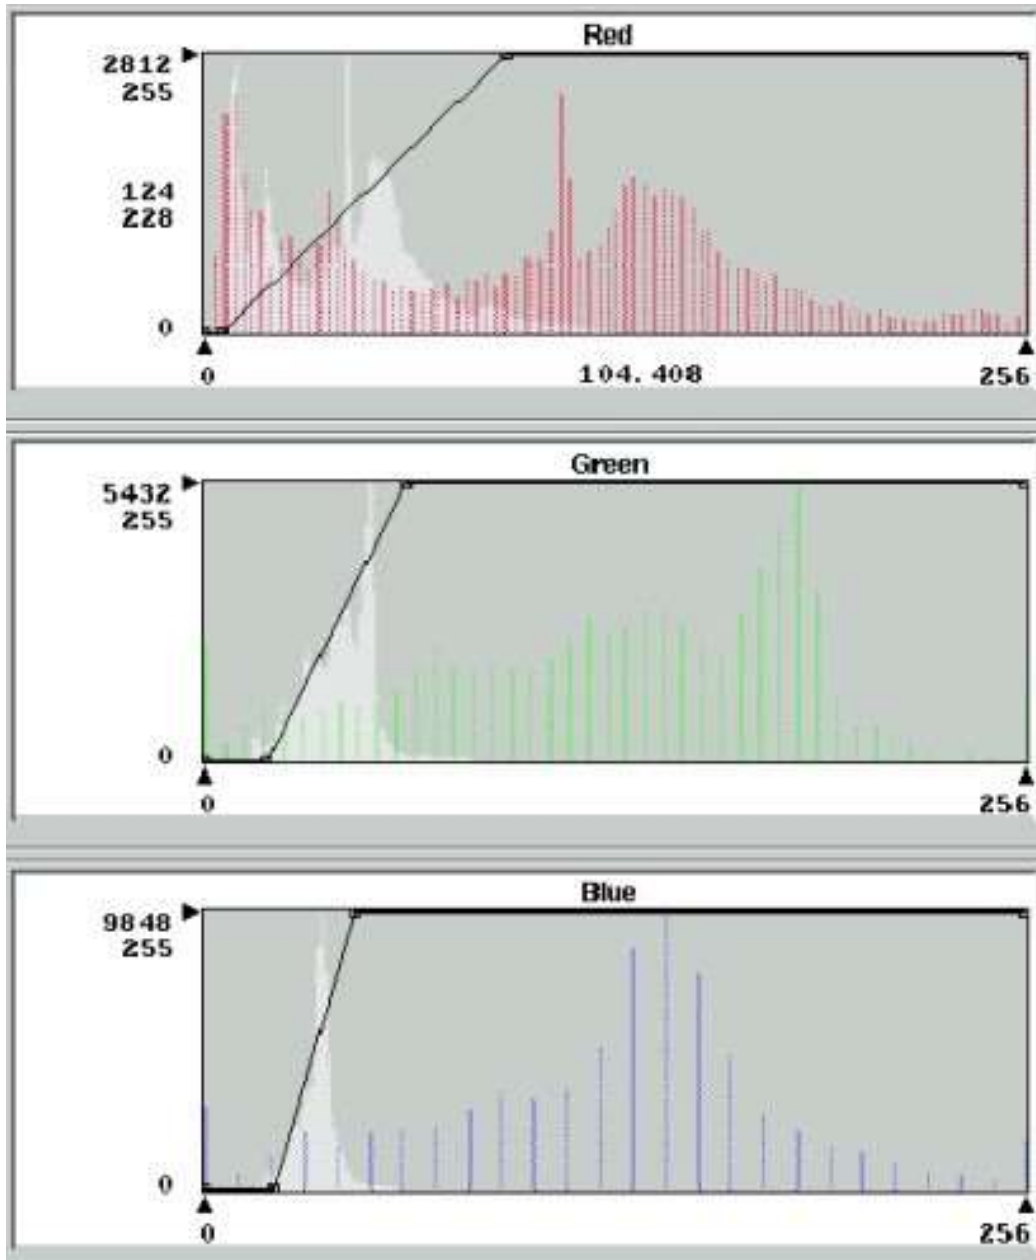



Figure 4.5. Pixel population and distribution across the 0 to 255 DN range. All three plots show the pixel distribution before and after a linear stretch function (white denotes pre-stretch distribution and colored elements denote stretched pixel distribution). The stretched histogram shows gaps between the single values due to the discrete number of pixel values in the data set. The top histogram (red) has a bimodal distribution. The middle (green) maintains a skewed distribution, while the last histogram (blue) reveals a normal distribution. The solid black line superimposed in each image indicates the maximum and minimum DN value that is stretched across the entire range.



Figure 4.6. Unenhanced satellite data on left. After a default stretch, image contrast is increased as the DN values are distributed over the 0–255 color range. The resulting scene (shown on the right) has a higher contrast.

4.9.3.2. Histogram Equalization Stretch. Low contrast can still occur when values are spread across the entire range. The low contrast is a result of tight clustering of pixels in one area (Figure 4.7a). Because some pixel values span the intensity range, it is not possible to apply the contrast linear stretch. In Figure 4.7a, the high peak on the low intensity end of the histogram indicates that a narrow range of DNs is used by a large number of pixels. This explains why the image appears dark despite the span of values across the full 0–255 range.

4.9.3.3. Histogram equalization (Figure 4.7b) evenly distributes the pixel values over the entire intensity range (see steps below). The pixels in a scene are numerically arranged into 255 equal-sized groups and display brightness is assigned based on the ordinal number of the group. This method is generally used to improve contrast of very dark or very bright pixels in a scene, but often has limited effect on intermediate values (as it effectively flattens peaks in the histogram while emphasizing troughs).

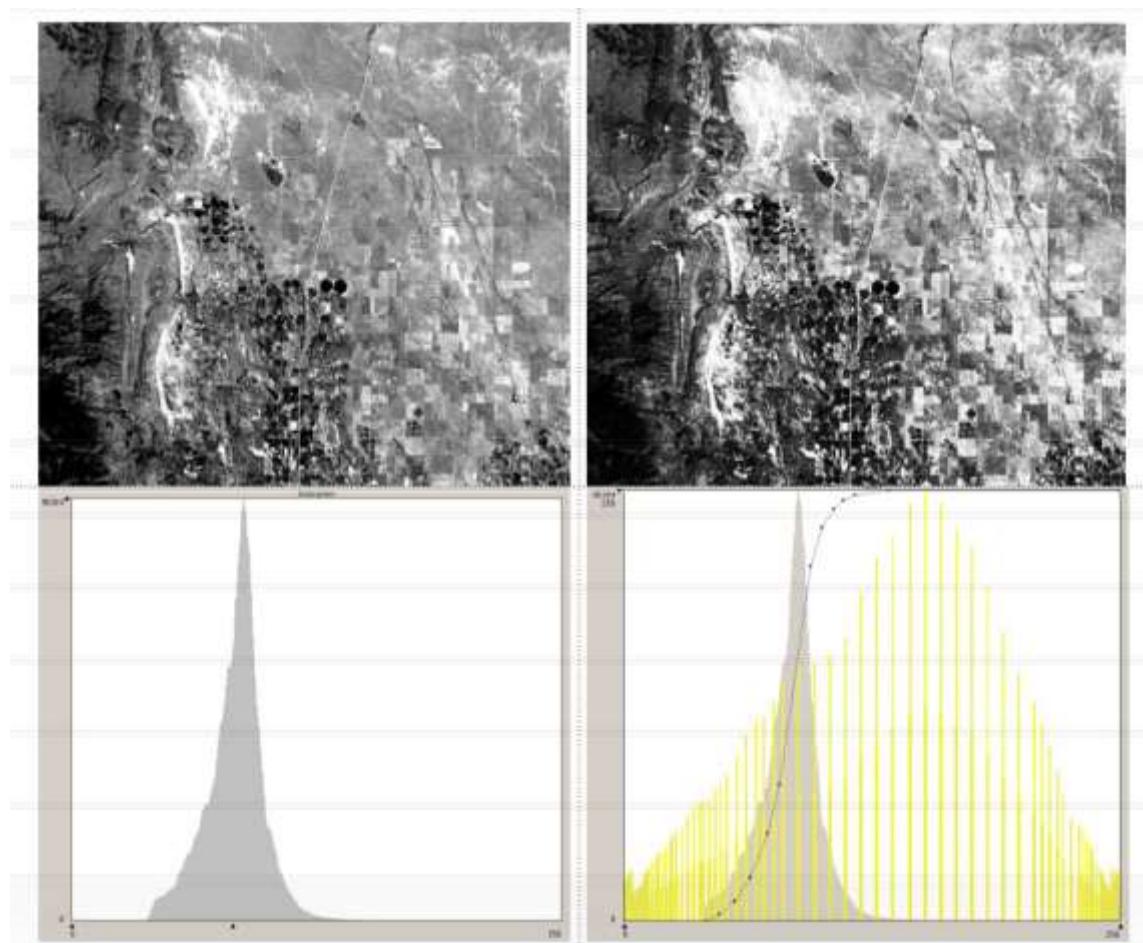

a. Image and its corresponding DN histogram show that the majority of pixels are clustered together (centering approximately on DN value of 100).

b. After histogram equalization stretch the pixels are reassigned new values and spread out across the entire value range. The data maximum is subdued while the histogram leading and trailing edges are amplified, the resulting image has an overall increase in contrast.

Figure 4.7. Example histograms from a histogram equalization stretch

4.9.3.4. Logarithmic Stretch. Another type of enhancement stretch uses a logarithmic algorithm. This type of enhancement improves contrast among values on the lower end of the image distribution. Contrast among values on the upper end of the image distribution is generally sacrificed.

4.9.3.5. Manual Enhancement. Some software packages will allow users to define an arbitrary enhancement. This can be done graphically or numerically. Manually adjusting the enhancement allows the user to reduce the signal noise in addition to reducing the contrast in unimportant pixels. Note that the processes described above do not alter the spectral radiance of the pixel raw data. Instead, the output display of the radiance is modified by a computed algorithm to improve image quality.

4.9.4. Band Arithmetic. While contrast stretching provides many valuable display options, sometimes fundamentally changing or combining data sets is necessary to enhance interpretation. Remote sensing software provides tools to do calculations on a per-pixel basis across an image, which has many important applications.

4.9.4.1. Band Ratio. Band ratio is a commonly used band arithmetic method in which values of one data set (band) are divided by those of another. Band ratios are used to highlight specific relationships between two spectral regions. For example, consider an image with a grassy field next to an artificial turf field. In a true color image, the fields appear to be similar. In a band ratio of IR and green bands of the same scene, the grassy field would appear very bright, while the artificial turf field would be grey or dark (artificial turf is low reflectance in the IR).

4.9.4.2. Another application of band ratios is reducing the effects of shadows within an image. Shadows reduce the brightness of pixels equally across all bands because they are blocking the light source in the image. Because of this, shadowed and unshadowed pixels have the similar values in band ratio, while being very different individually. See Table 4.1 for an example.

4.9.4.3. Band ratios can also be used to highlight temporal change by computing a ratio between two images of the same band at two different times. In such an image, unchanged pixels would appear grey (within the dynamic range of the image), and pixels that experienced a change during that time period would be shown as darker greys or whiter greys, depending on the magnitude and nature of the change.

Table 4.1
Minimizing the effects of shadows using a band ratio

Tree type	Light conditions	Band A (DN)	Band B (DN)	Band A/B (ratio) (DN)
Deciduous Trees	In sunlight	48	50	0.96
	In shadow	18	19	0.95
Coniferous Trees	In sunlight	31	45	0.69
	In shadow	11	16	0.69

4.9.4.4. Normalized Difference Ratios. Normalized difference ratios highlight the difference between two spectral bands. To minimize artifacts caused by differencing images, the results are normalized using the original values. The generalized equation for a normalized difference ratio is $ND = (DN2 - DN1)/(DN2 + DN1)$, where DN1 and DN2 are raster data sets or sensor bands. Common products utilizing normalized difference ratios are the Normalized Difference Vegetation Index (NDVI), where DN1 is a red band and DN2 is an IR band, and the

Normalized Difference Snow Index (NDSI), where DN1 is a green band and DN2 is a SWIR band.

4.9.5. Spatial Filters. It is occasionally advantageous to reduce the detail or exaggerate particular features in an image. This can be done by a convolution method creating an altered or “filtered” output image data file. Numerous spatial filters have been developed and can be automated within software programs. A user can also develop his or her own spatial filter to control the output data set. Presented below is a short introduction to the method of convolution and a few commonly used spatial filters.

4.9.5.1. Convolution is a mathematical operation used to change the spatial frequency of digital data in the image. It is used to suppress noise in the data or to exaggerate features of interest. The operation is performed with the use of a spatial kernel. A kernel is an array of DN values that form a matrix with odd numbered rows and columns (Table 4.2). The kernel values, or coefficients, are used to average each pixel relative to its neighbor across the image. The output data set will represent the averaging effect of the kernel coefficients. As a spatial filter, convolution can smooth or blur images, thereby reducing image noise. In feature detection, such as an edge enhancement, convolution works to exaggerate the spatial frequency in the image. Kernels can be reapplied to an image to further smooth or exaggerate spatial frequency.

4.9.5.2. Low pass filters apply a small gain to the input data (Table 4.2a). The resulting output data will decrease the spatial frequency by de-emphasizing relatively bright pixels. Two types of low pass filters are the simple mean and center-weighted mean methods (Table 4.2a and b). The resultant image will appear blurred. Alternatively, high pass frequency filters (Table 4.2c) increase image spatial frequency. These types of filters exaggerate edges without reducing image details (an advantage over the Laplacian filter discussed below).

4.9.5.3. The Laplacian filter detects discrete changes in spectral frequency and is used for highlighting edge features in images. This type of filter works well for delineating linear features, such as geologic strata or urban structures. The Laplacian is calculated by an edge enhancement kernel (Table 4.2d and e); the middle number in the matrix is much higher or lower than the adjacent coefficients. This type of kernel is sensitive to noise and the resulting output data will exaggerate the pixel noise.

Table 4.2

Variety in 9-Matrix Kernel Filters Used in a Convolution Enhancement. Each graphic shows a kernel, an example of raw DN data array, and the resultant enhanced data array

	Raw Data	Output Data
a. Low Pass: simple mean kernel. <div> <div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>10</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> </div>
b. Low Pass: center weighted mean kernel. <div> <div>1</div><div>1</div><div>1</div> <div>1</div><div>2</div><div>1</div> <div>1</div><div>1</div><div>1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>10</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>3</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>2</div><div>2</div><div>2</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div><div>1</div> </div>
c. High Pass kernel. <div> <div>-1</div><div>-1</div><div>-1</div> <div>-1</div><div>8</div><div>-1</div> <div>-1</div><div>-1</div><div>-1</div> </div>	<div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>15</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> <div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div><div>10</div> </div>	<div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-5</div><div>-5</div><div>-5</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-5</div><div>40</div><div>-5</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-5</div><div>-5</div><div>-5</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> </div>
d. Direction Filter: north-south component kernel. <div> <div>-1</div><div>-2</div><div>-1</div> <div>2</div><div>4</div><div>2</div> <div>-1</div><div>-2</div><div>-1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> </div>	<div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>-4</div><div>8</div><div>-4</div><div>0</div><div>0</div> </div>
e. Direction Filter: East-west component kernel. <div> <div>-1</div><div>-2</div><div>-1</div> <div>2</div><div>4</div><div>2</div> <div>-1</div><div>-2</div><div>-1</div> </div>	<div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> <div>1</div><div>1</div><div>1</div><div>2</div><div>1</div><div>1</div><div>1</div> </div>	<div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> <div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div><div>0</div> </div>

4.9.5.4. A smoothing convolution filter can be applied to the image in advance to reduce the edge filter's sensitivity to data noise. The Laplacian filter measures the changes in spectral frequency or pixel intensity. In areas of the image where the pixel intensity is constant, the filter assigns a DN value of 0. Where there are changes in intensity, the filter assigns a positive or negative value to designate an increase or decrease in the intensity change. The resulting image will appear black and white, with white pixels defining the areas of changes in intensity.

4.9.6. Scatter plots. The correlation between bands can be visualized in scatter plots generated by the software. The scatter plots graph the DN value of one band relative to another (Figure 4.8). Bands that are highly correlated will produce plots with a linear relationship and little deviation from the line. Bands that are not well correlated will lack a linear relationship. Clustering of different spectral species in a scatter plot indicates that a particular band combination may be useful for interpretation or for use in a band ratio. The ability to easily delineate spectral species is called separability and is utilized both for manual interpretation and also for classification (discussed below).

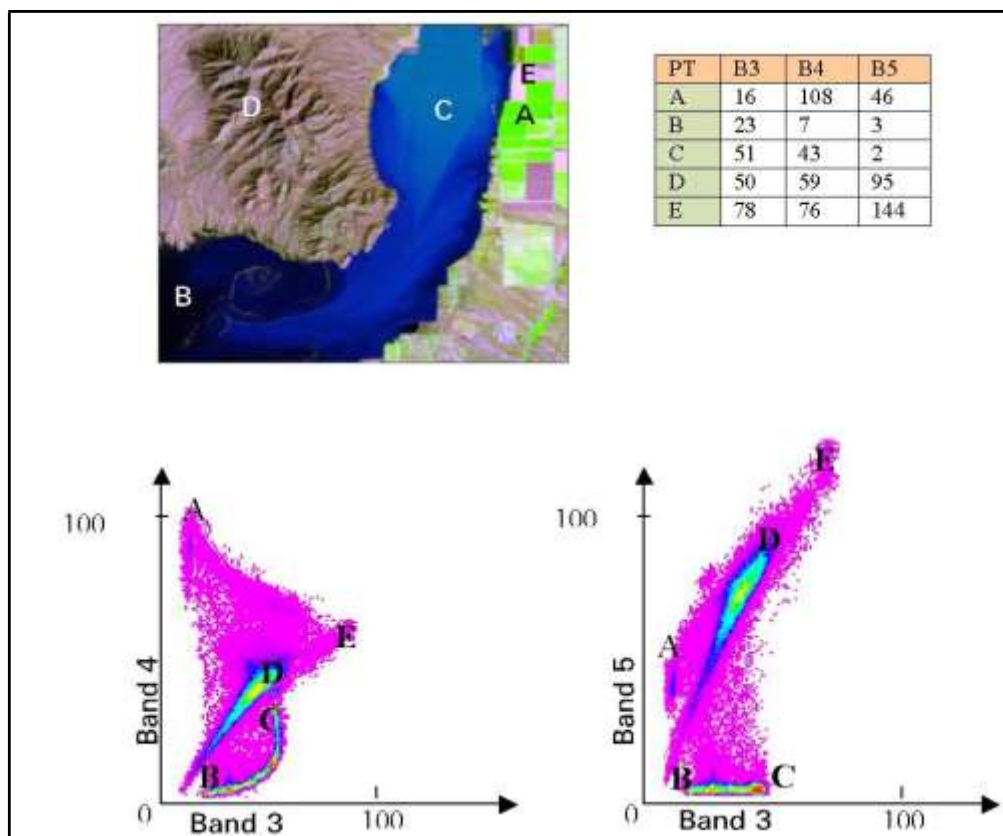


Figure 4.8. Landsat TM band 345 RGB color composite with accompanying image scatter plots.

The scatter plots map band 3 relative to bands 4 and 5 onto a feature space graph. The data points in the plot are color coded to display pixel population. The table provides the pixel count for five image features in bands 3, 4, and 5. A is agricultural land, B is deep (partially clear) water, C is sediment laden water, D is undeveloped land, E fallow fields.

4.9.7. Principal Components. Principal component (PC) analysis is a technique that highlights spectral covariance within a scene by transforming the axes used to display the scene. The transformation is accomplished by rotating the horizontal axis of the scatter plot so that it is parallel to a least squares regression line that estimates the data. This transformed axis is known as PC1, or Principal Component 1.

4.9.8. A second axis, PC2, is drawn perpendicular to PC1, and its origin is placed at the center of the PC1 range (Figure 4.9). The DN values are then re-plotted on the newly transformed axes. Each principal component output can be viewed as its own greyscale raster or combined into a color composite. PC1 captures ~90% of the variance in a scene with each subsequent principal component display less (PC2 ~5%, PC3 ~3%, and so on; Figure 4.10). For a complete discussion of the technique, see Jensen (1996).

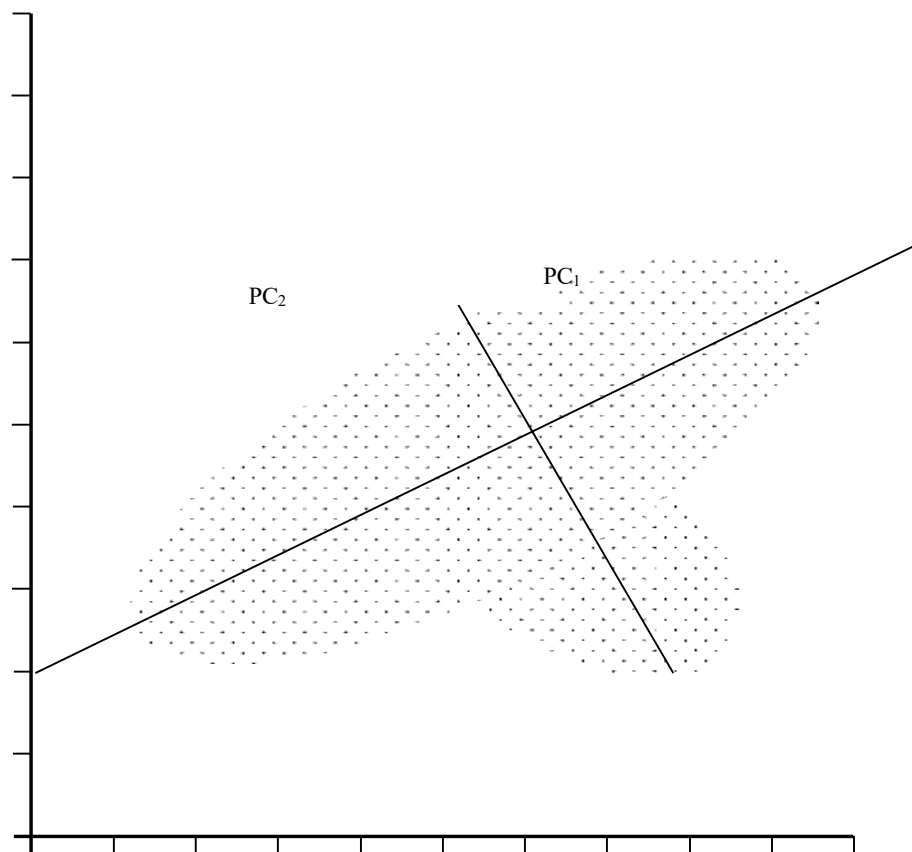


Figure 4.9. Idealized PC analysis. Two datasets are plotted against each other (one on each axis) to highlight their spectral variance. The first principle component (PC1) is the line describing the largest amount of variance. Its midpoint is the mean value of the dataset. Stretching the image such that its dynamic range and relative values match that of PC1 produces the most contrast, based on variance, seen in the image. Subsequent principle components are created by creating axes orthogonal to the previous PC and highlight increasingly lower variance dimensions.

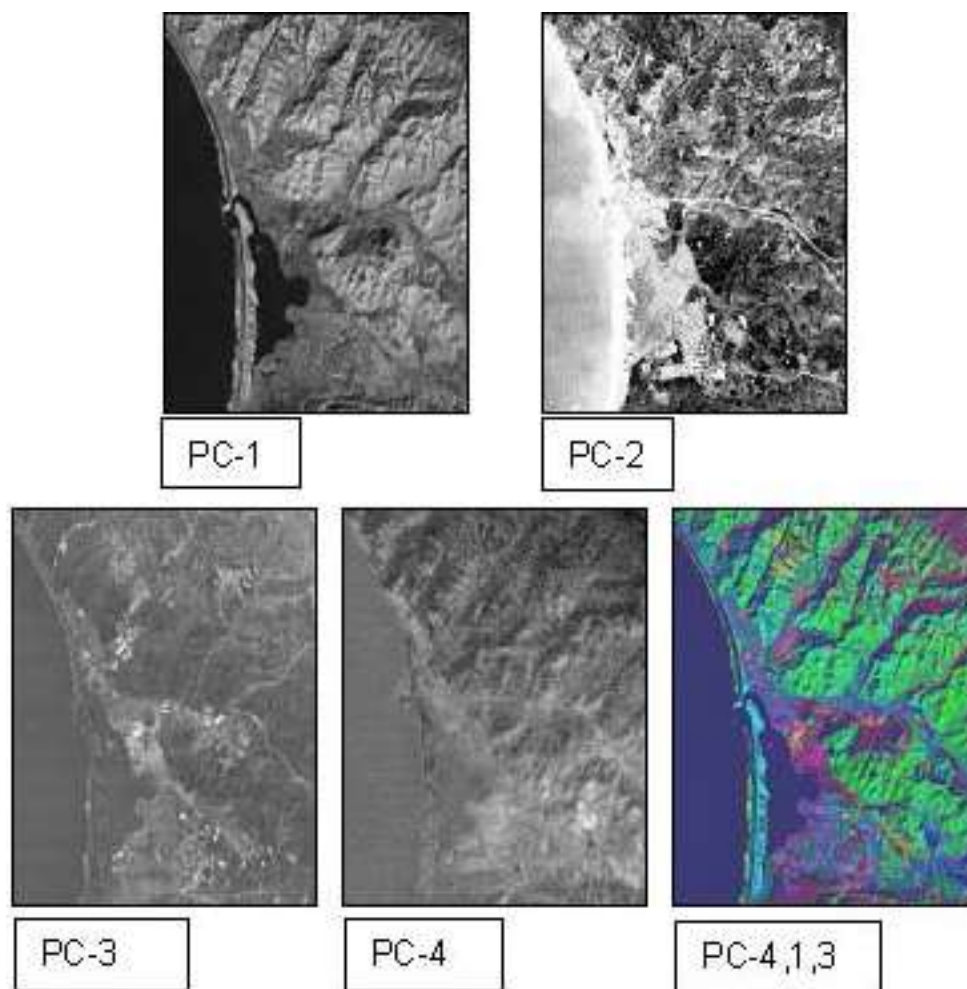


Figure 4.10. PC-1 contains most of the variance in the data, each successive PC-transformation isolates less and less variation in the data

4.9.9. Image Classification. Raw digital data can be sorted and categorized into thematic or classified maps. Thematic maps allow the analyst to simplify the image view by assigning pixels into classes with similar spectral values (Figure 4.11). The process of categorizing pixels into broader groups is known as image classification. The advantage of classification is it allows for cost-effective mapping of the spatial distribution of similar objects (e.g., tree types in forest scenes); a subsequent statistical analysis can then follow.

4.9.10. Thematic maps are developed by two types of classifications, supervised and unsupervised. Both types of classification rely on two primary methods, training and classifying. Training is the designation of representative pixels that define the spectral signature of the object class. Training site or training class is the term given to a group of training pixels. Classifying procedures use the training class to classify the remaining pixels in the image.

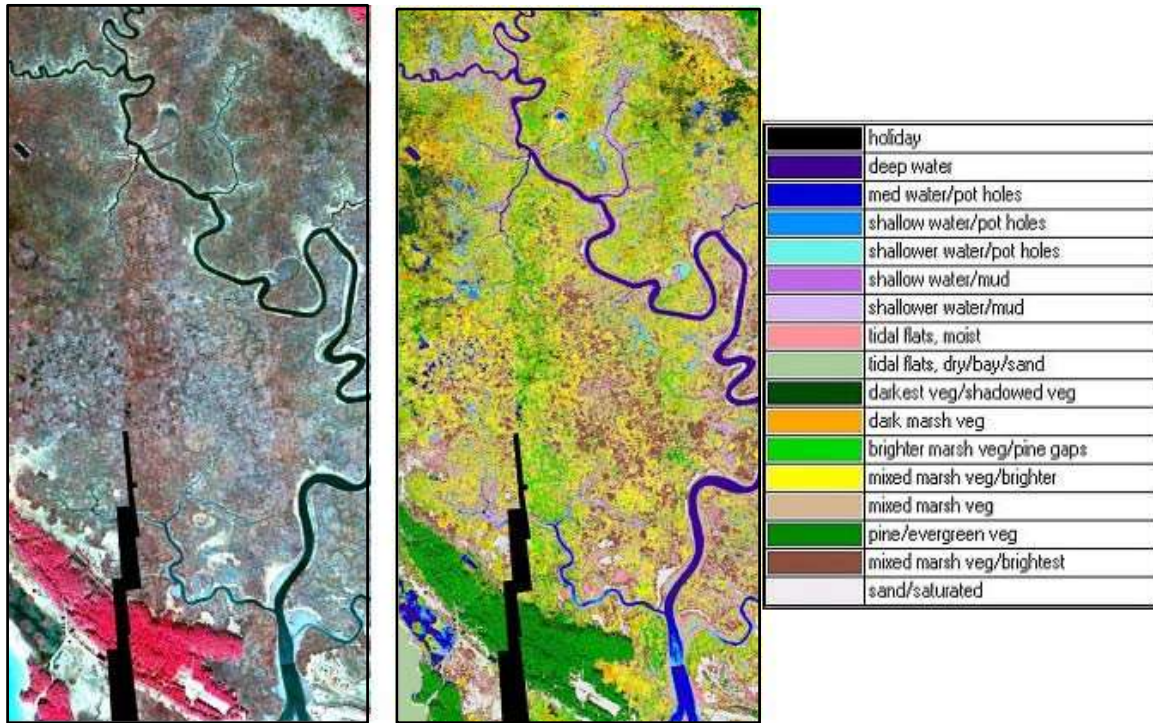


Figure 4.11. Landsat image (left) and its corresponding thematic map (right) with 17 thematic classes; the black zigzag at bottom of image is the result of shortened flight line over-lap (Campbell, 2003)

4.9.10.1. Supervised Classification. In a supervised classification, the user creates training data that the classification algorithm uses to segment the scene. Training data can be generated from spectral libraries or from visual interpretation of the scene itself. Clusters of pixels, representing thematic classes such as “Forest” or “Water,” are delineated by the user and then used as inputs to a classification algorithm. The most common classification algorithms are minimum-distance-to-means, parallelepiped, and maximum likelihood. An example thematic map can be seen in Figure 4.11 and its associated pixel counts in Figure 4.12.

SORT #	CLASS NAME	COLOR	TRAINING	CLASSIFIED	% TOTAL
1	Unclassified			25,207,732	68.86%
2	ROAD	Red1	77	0	0.00%
3	AG	Green1	1642	0	0.00%
4	LP	Red1	4148	2,164,089	5.91%
5	LPO	Blue1	5627	1,562,180	4.27%
6	LPH	Maroon1	4495	2,170,395	5.93%
7	MHW-low	Aquamarine	888	329,360	0.90%
8	CUT	Chartreuse	1219	1,055,063	2.88%
9	MHW-high	Sienna1	3952	1,566,698	4.28%
10	MORT	Green3	1703	4,651	0.01%
12	juncus-low-density	Red1	52	37,808	0.10%
13	juncus-high-density	Blue1	65	102,174	0.28%
13	juncus-panicum-mix	Cyan1	53	0	0.00%
14	juncus-mixed-clumps-field	Magenta1	29	3	0.00%
16	g1=hd-scol+background+w	Green1	32	610,283	1.67%
17	g2=md-scol+background	Yellow1	29	952	0.00%
18	g4=md-scol+spartina+mud	Maroon1	36	0	0.00%
19	g3=md-	Purple1	50	0	0.00%
20	g5=ld-scol+mud	Aquamarine	56	617	0.00%
21	g1=md-spal+w	Red1	66	4,789	0.01%
22	g2=hd-spal+w	Green1	52	141,060	0.39%
23	g3=hd-spal+w+sppa	Cyan1	29	803,145	2.19%
24	g4=md-spal+w+sppa	Magenta1	44	0	0.00%
25	g5=hd-spal+mud	Red1	25	25	0.00%
26	g6=mixed-spal	Chartreuse	28	6,555	0.02%
26	g7=md-spal+lit+mud	Thistle1	36	6	0.00%
28	g8=md-mixed-spal	Blue4	85	0	0.00%
29	g1=hd-sppa+mix	Red1	37	74	0.00%
30	g2=hd-sppa+mud	Blue1	40	0	0.00%
31	g3=mhd-sppa+spal+background	Cyan1	32	939	0.00%
32	g4=lmd-sppa+mix+background	Magenta1	160	0	0.00%
33	g9=ld-sppa+spal+mud	Blue4	28	520,290	1.42%
34	g10=ld-sppa+mix+background	Cyan3	45	0	0.00%
35	g11=ld-sppa+w+mix	Green2	32	1,255	0.00%
37	Total			11082411.00	

Figure 4.12. Classification training data of 35 landscape classification features “Training” provides the pixel count after training selection; classification provides the image pixel count after a classification algorithm is performed. This data set accompanies Figure 4.11, the classified image. (Campbell, 2003).

a. Minimum-Distance-to-Means. Minimum-distance-to-means is a simple computation that classifies pixels based on their distance from the mean of the training class. It is determined by plotting the pixel brightness and calculating its Euclidean distance to the unassigned pixel. Pixels are assigned to the training class for which it has a minimum distance. The user

designates a minimum distance threshold for an acceptable distance; pixels with distance values above the designated threshold will be classified as unknown.

b. **Parallelepiped.** In a parallelepiped computation, unassigned pixels are grouped into a class when their brightness values fall within a range of the training mean. An acceptable DN range is established by setting the maximum and minimum class range to plus and minus the standard deviation from the training mean. The pixel brightness value simply needs to fall within the class range, and is not based on its Euclidean distance. It is possible for a pixel to have a brightness value close to a class and not fall within its acceptable range. Likewise, a pixel may be far from a class mean, but fall within the range and therefore be grouped with that class. This type of classification can create training site overlap, causing some pixels to be misclassified.

c. **Maximum Likelihood.** Maximum likelihood classifiers calculate probability surfaces based on covariance around class means. A probability threshold is established for designating classes, and for any given pixel, if it falls within the probability threshold for a class, it is assigned to that class. This method is functionally similar to the minimum-distance-to-mean classifier, but the distance to probability relationship is not necessarily linear. These methods offer different levels of customization in standard software and produce somewhat different results. Choosing a classification algorithm will vary by application. Example outputs of the three classification algorithms can be seen in Figure 4.13.

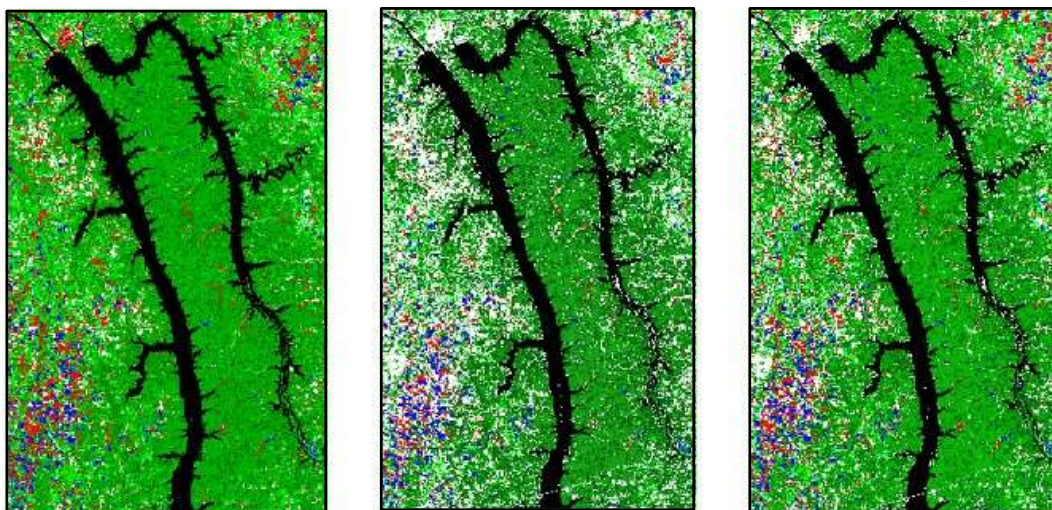


Figure 4.13. Example classification method outputs from left to right: minimum distance from mean, parallelepiped, and maximum likelihood

4.9.10.2. **Unsupervised Classification.** Unsupervised classification utilizes algorithms to identify similar pixels and automatically separate them into thematic classes. As opposed to supervised classification, where much of the user input occurs at the beginning of the process, most of the effort required in unsupervised classification involves interpreting the results after the process has been completed. In most software packages, the user designates: (1) the number

of classes, (2) the maximum number of iterations or refinements to the spectral classes that the algorithm will perform, (3) the maximum number of times a pixel can be moved from one cluster to another with each iteration, (4) the minimum distance from the mean, and (5) the maximum standard deviation allowable. Default values for these parameters often exist, but producing a favorable output might require some trial and error.

4.9.10.3. A variety of clustering algorithms exist, but they all operate in a similar way; in the beginning of the process, each pixel in an image is randomly assigned to an output class (based on the user-specified number of classes). The distance (in n-dimensional, spectral space, where n is the number of bands) from each pixel to the center of its designated class is calculated (similar to minimum-distance-to-means). Once the mean values of each class are established, pixels are reclassified based on the class they are closest to (again based on user input thresholds). This process is repeated (up to the maximum number of iterations) or until a particular pixel has stopping changing classes (or changed too many times—this could occur if a pixel lies near the boundary of two spectrally similar classes).

4.9.10.4. Once the number of iterations is exceeded or no more pixels are changing classes, the algorithm stops. At this point, the user must determine what thematic data (such as land cover) each of the generated classes represents. The outputs of the algorithm are referred to as spectral classes. Depending on the intensity and quality of the classification, as well as the intended application, a user may want to merge multiple spectral classes into a single information class for display in a final product. Similarly, if a spectral class includes multiple information classes (as determined by the user) the algorithm can be re-run on an individual class or an individual area of interest to improve the classification. Classification is an iterative process, and the “right answer” is often highly dependent on the user and the application.

Assessing Error. If a reference map or field data exists with which to assess the accuracy of a classification, said accuracy is often described by an error matrix (

4.9.10.5. Table 4.3). The matrix establishes the level of errors due to omission (exclusion error), commission (inclusion error), and can tabulate an overall total accuracy. The error matrix lists the number of pixels found within a given class. The rows list the pixels classified by the image software. The columns list the number of pixels in the reference data (or reported from field data). Omission error calculates the probability of a pixel being accurately classified; it is a comparison to a reference. Commission determines the probability that a pixel represents the class for which it has been assigned. The total accuracy is measured by calculating the proportion correctly classified pixels relative to the total tested number of pixels (Total = total correct/total tested).

Table 4.3
Omission and Commission Accuracy Assessment Matrix (Jensen 1996)

Reference Data						
Classification	Residentia	Commercial	Wetland	Forest	Water	Raw Total
Residential	70	5	0	13	0	88
Commercial	3	55	0	0	0	58
Wetland	0	0	99	0	0	99
Forest	0	0	4	37	0	41
Water	0	0	0	0	121	121
Column Total	73	60	103	50	121	407
Overall Accuracy = 382/407 = 93.86%						
<u>Producer's Accuracy</u> (measure of omission error) Residential= 70/73 = 96–4% omission error Commercial= 55/60 = 92–8% omission error Wetland= 99/103 = 96–4% omission error Forest= 97/50 = 74–26% omission error Water= 121/121 = 100–0% omission error			<u>User's Accuracy</u> (measure of commission error) Residential= 70/88 = 80–20% omission error Commercial= 55/58 = 95–5% omission error Wetland= 99/99 = 100–0% omission error Forest= 37/41 = 90–10% omission error Water= 121/121 = 100–0% omission error			
Data are the result of an accuracy assessment of Landsat TM data (Jensen 1986)						

4.10. Image Mosaics, Image Subsets, and Multiple Image Analysis.

4.10.1. Image Mosaics. It is not uncommon for a study area to include areas beyond the range of an individual scene. In such a case, it will be necessary to collect adjacent scenes and mosaic or piece them together. It is preferable to choose scenes with data collected during the same season or general timeframe and under similar weather conditions. Images can only be properly pieced together if their data are registered in the same projection and datum. It will be important to assess the registration of all images before attaching the scenes together. If any of the images are misregistered, this will lead to gaps in the image or it will create pixel overlay. (Figure 4.1414)

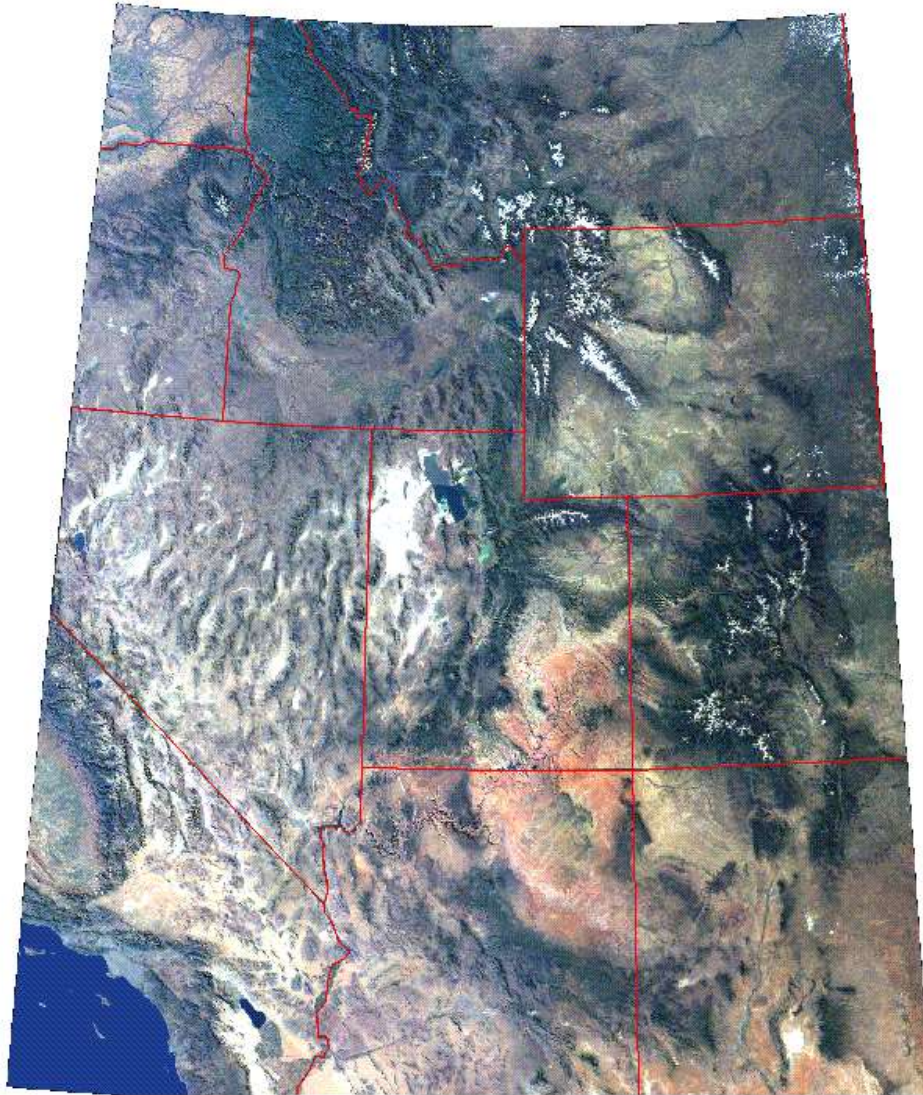


Figure 4.14. Multi-image mosaic of Western United States centered on the state of Utah. Mosaic seams are invisible in this scene, an indication of good radiometric and geometric corrections. The skewed and curved margins are an artifact of the rectification and mosaic process.

4.10.2. Image Mosaic and Image Subset. The mosaic process is a common feature in image processing programs. It is best to perform image enhancements prior to piecing separate scenes together. Once the images are pieced together, the resulting image may be large and include areas outside the study region. It is good practice to take a subset of this larger scene to reduce the size of the image file. This will make subsequent image processing faster.

4.10.3. To do this, use the clip or subset function in a software program. The clip function will need to know the corner coordinates of the subset (usually the upper left and lower right). Some software may require this procedure to be repeated for each individual band of data. The

subset should be named and saved as a separate file or files. Note: An image subset may also be required if the margins of a newly registered scene are skewed or if the study only requires a small portion of one scene. Reduction of the spatial dimensions of a scene reduces the image file size, simplifies image classification, and prepares the image for map production.

4.10.4. Multiple-Image Temporal Analysis. It is possible to combine bands from different images or data sets. This allows a user to perform a change detection analysis. The process of “layering” multi-temporal data involves loading a composite of bands from different images of the same scene. For example, a study assessing urban development in a forested area would benefit from examining a band combination that included Band 3 data in the red plane, and Band 3 data of a later image in the green plane. If the spectral signature of the scene has changed and is detectable within the resolution of the data, then changes in the scene will be highlighted.

4.10.5. This image can then be classified and the areas of change can be statistically assessed. To perform this task accurately, it is important that both images are registered properly. Misregistration will lead to an offset in the image, which leaves brightly colored lines of pixels. Be sure to choose images whose data were collected under similar conditions, such as the same season, time of day, and prevailing weather (namely, minimum cloud cover).

4.11. DEMs. A DEM is a digital display of cartographic elements, particularly topographic features (Figure 4.15). DEMs utilize two primary types of data, DTMs and Digital Surface Models (DSMs). A DTM represents elevation points of the ground, while a DSM is the elevation of points at the surface, which includes the top of buildings and trees, in addition to terrain. A DEM incorporates elevation data and projects it relative to a coordinate reference point. (See the USGS National Map website at <http://nationalmap.gov/index.html> for more information on DEM, DTM, and DSMs.)



Figure 4.15. DEM. The brightness values in this image represent elevation data. Dark pixels correspond to low elevations while the brightest pixels represent higher elevations.

4.12. Advanced Topics in Image Processing. Remote sensing software facilitates a number of advanced image processing methods. These advanced methods include the processing of hyperspectral data, thermal data, and radar data.

4.12.1. Hyperspectral Data. Hyperspectral image processing techniques manage narrow, continuous bands of spectral data. Many hyperspectral systems maintain over 200 bands of spectral data. The narrow bands, also known as channels, provide a high level of detail and resolution. This high resolution facilitates the identification of specific objects, thereby improving classification (Figure 4.16). The advantage of hyperspectral imaging lies in its ability to distinguish individual objects that would be otherwise grouped in broadband multi-spectra imagery. Narrow bands are particularly useful for mapping resources such as crop and mineral types. The narrow, nearly continuous bands create large data sets, which require advance software and hardware to store and manipulate the data.

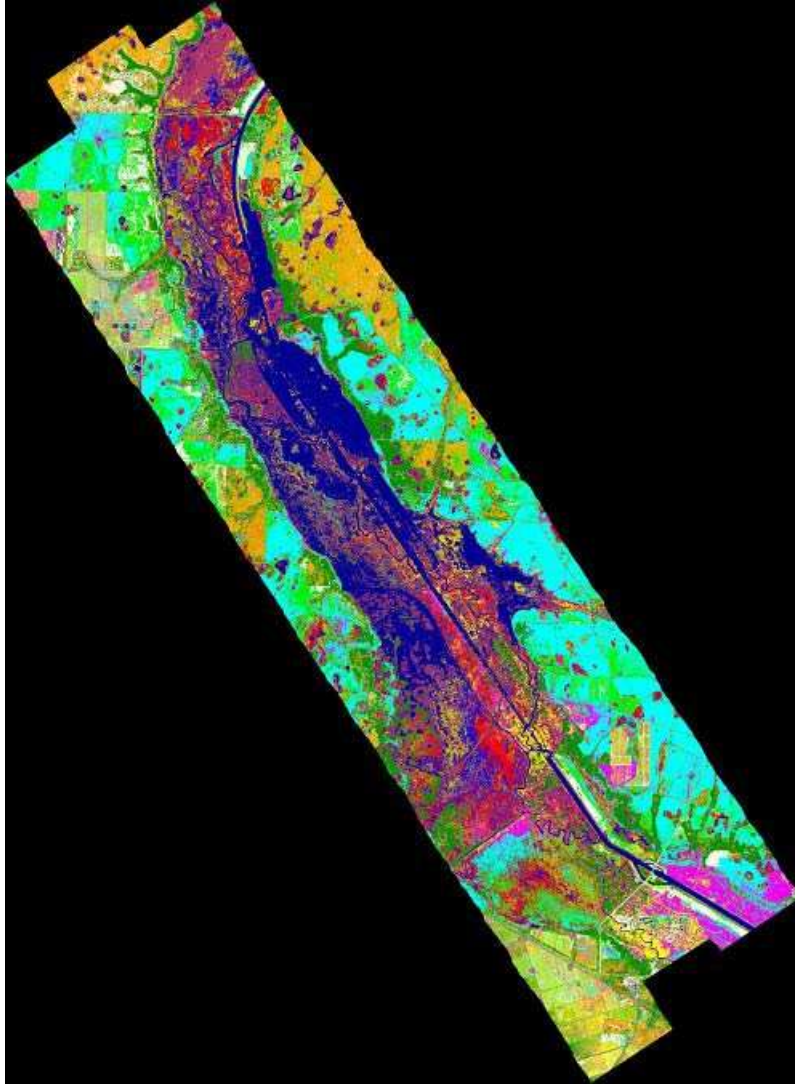


Figure 4.16. Hyperspectral classification image of the Kissimmee River in Florida (Classifications of 28 vegetation communities are based on a supervised classification)

4.12.2. Thermal Data. Thermal image processing techniques are used to image objects by the analysis of their emitted energy (Figure 4.17). The thermal band wavelength ranges are primarily 8 to 14 μm and 3 to 5 μm . The analysis of thermal data is typically used in projects that evaluate surface temperatures, such as oceans and ice sheets, volcano studies, and the emission of heat from manmade objects such as pipelines or buildings.

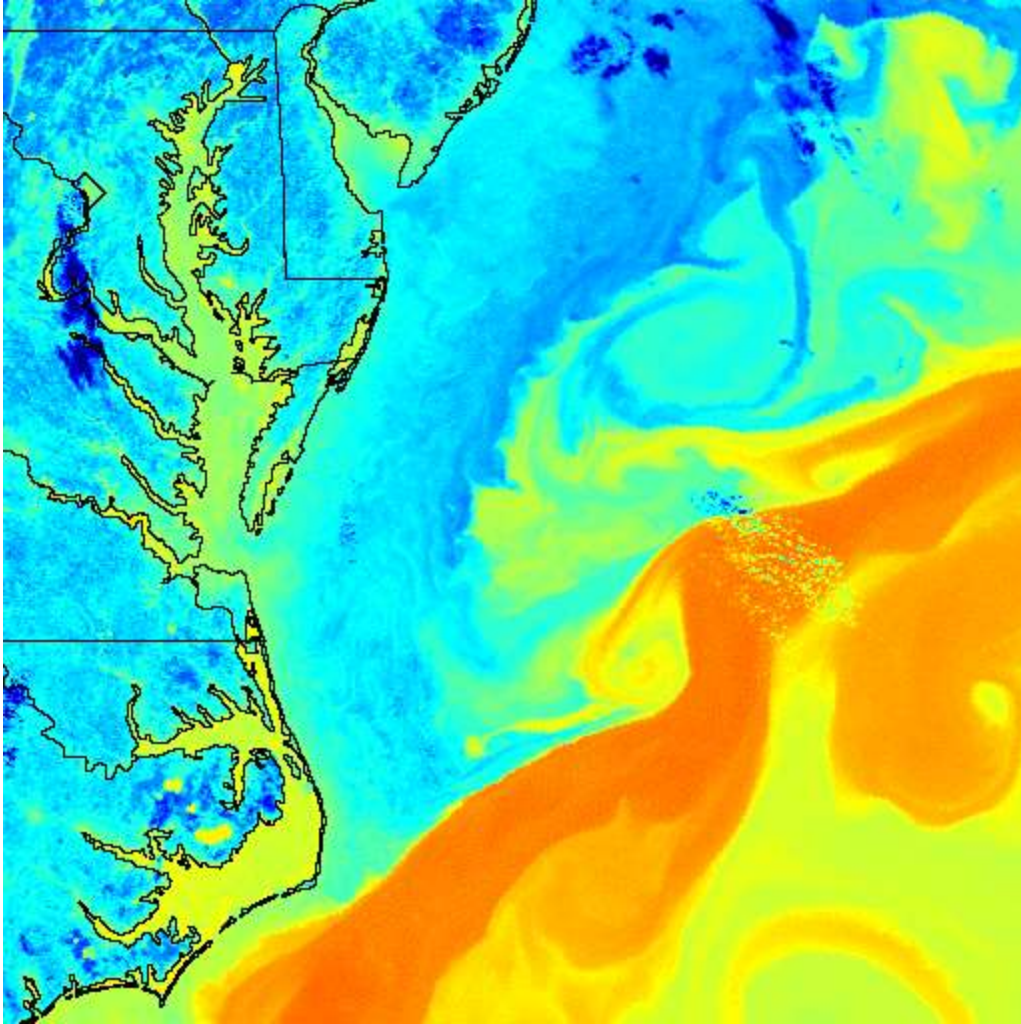


Figure 4.17. Close-up of the Atlantic Gulf Stream; ocean temperature and current mapping was performed with AVHRR thermal data and the temperatures have been classified and color-coded. Yellow = water 23°C (73°F), green = 14C° (57°F), blue = 5°C (41°F)

4.12.3. Radar. Radar (radio detection and ranging) systems are able to penetrate cloud cover in certain wavelengths. This technology is useful for imaging day or night surface features during periods of intense cloud cover, such as storms and smoke from fire, sand, or dust storms (Figure 4.18).



Figure 4.18. A Synthetic Aperture Radar Radarsat image (10-meter resolution) centered on St. Louis, Missouri; the Illinois River (upper left), Mississippi River (large channel in center), and the Missouri River (smaller channel in center) are the main features in this image) (Tracy 2003)

This page intentionally left blank

Glossary

Abbreviations and Terms

Absolute temperature

Temperature measured on the Kelvin scale, whose base is absolute zero, i.e., -273 °C (0 °C is expressed as 273 °K).

Active remote sensing

Remote sensing methods that provide their own source of electromagnetic radiation to illuminate the terrain. Radar is one example.

Antenna

Device that transmits and receives microwave and radio energy in radar systems.

Aperture

Opening in a remote sensing system that admits electromagnetic radiation to the film in radar systems.

Areal

Relating to or involving an area.

Artifact

A feature on an image, which is produced by the optics of the system or by digital image processing, and sometimes masquerades as a real feature.

Atmosphere

Layer of gases that surrounds some planets.

Atmospheric correction

Image-processing procedure that compensates for effects of selectivity scattered light in multispectral images.

Atmospheric window

Wavelength interval within which the atmosphere readily transmits electromagnetic radiation.

Attitude

Angular orientation of remote sensing system with respect to a geographic reference system.

Background

Area on an image or the terrain that surrounds an area of interest or target.

Backscatter

In radar, the portion of the microwave energy scattered by the terrain surface directly back toward the antenna.

Band

A wavelength interval in the electromagnetic spectrum. For example, in Landsat images the bands designate specific wavelength intervals at which images are acquired.

Bathymetry

Configuration of the seafloor.

Beam

A focused pulse of energy.

Bilinear

The term bilinear is referring to a bilinear interpolation. This is simply an interpolation with two variables instead of one.

Bin

One of a series of equal intervals in a range of data, most commonly employed to describe the divisions in a histogram.

Binary

Based upon the integer two. Binary Code is composed of a combination of entities that can assume one of two possible conditions (0 or 1). An example in binary notation of the digits 111 would represent $(1 \times 2) + (1 \times 2) + (1 \times 2) = 4 + 2 + 1 = 7$.

Bit

Contraction of binary digit, which in digital computing represents an exponent of the base 2.

Blind spot

The point of the optic nerve to the retina where no radiation is detected by the eye.

Bits Per Inch (BPI)

The tape density to which the digital data were formatted.

Brightness

Magnitude of the response produced in the eye by light.

Brute Force Radar

See real-aperture radar.

Band Sequential (BSQ)

BSQ is a CCT tape format that stores each band of satellite data in one image file for all scanlines in the imagery array. The CCT headers are recorded on each band.

Byte

A group of eight bits of digital data.

Calibration

Process of comparing an instrument's measurements with a standard.

Calorie

Amount of heat required to raise the temperature of 1g of water by 1°C.

Camouflage detection photographs

Another term for IR color photograph.

Cardinal point effect

In radar, very bright signatures caused by optimally oriented corner reflectors, such as buildings.

Cartographic

Pertaining to cartography, the art or practice of making charts or maps.

Change-detection images

An image prepared by digitally comparing scenes acquired at different times. The gray tones or colors of each pixel record the amount of difference between the corresponding pixels of the original images.

Channels

A range of wavelength intervals selected from the electromagnetic spectrum.

Charge-coupled detector (CCD)

A device in which electrons are stored at the surface of a semiconductor.

Chlorosis

Yellowing of plant leaves resulting from an imbalance in the iron metabolism caused by excess concentrations of copper, zinc, manganese, or other elements in the plant.

Chromatic vision

The perception by the human eye of changes in hue.

CIR

Color infrared.

Circular scanner

Scanner in which a faceted mirror rotates about a vertical axis to sweep the detector IFOV in a series of circular scan lines on the terrain.

Classification

Process of assigning individual pixels of an image to categories, generally based on spectral reflectance characteristics.

Coastal zone color scanner (CZCS)

A satellite-carried multi-spectral scanner designed to measure chlorophyll concentrations in the oceans.

Coherent radiation

Electromagnetic radiation whose waves are equal in length and are in phase, so that waves at different points in space act in unison, as in laser and synthetic aperture radar.

Color composite image

Color image prepared by projecting individual black-and-white multispectral images, each through a different color filter. When the projected images are superposed, a color composite image results.

Color ratio composite image

Color composite image prepared by combining individual ratio images for a scene using a different color for each ratio image.

Complementary colors

Two primary colors of light (one additive and the other subtractive) that produce white light when added together. Red and cyan are complementary colors.

Conduction

Transfer of electromagnetic energy through a solid material by molecular interaction.

Cones

Receptors in the retina, which are sensitive to color. There are cones sensitive to the red, green, and blue components of light.

Context

The known environment of a particular feature on an image.

Contrast

The ratio between the energy emitted or reflected by an object and its immediate surroundings.

Contrast enhancement

Image-processing procedure that improves the contrast ratio of images. The original narrow range of digital values is expanded to utilize the full range of available digital values.

Contrast ratio

On an image, the reflectance ratio between the brightest and darkest parts of an image.

Contrast stretching

Expanding a measured range of digital numbers in an image to a larger range, to improve the contrast of the image and its component parts.

Convection

Transfer of heat through the physical movement of matter.

Corner reflector

Cavity formed by two or three smooth planar surfaces intersecting at right angles.

Electromagnetic waves entering a corner reflector are reflected directly back toward the source.

Cross-polarized

Describes a radar pulse in which the polarization direction of the return is normal to the polarization direction of the transmission. Cross-polarized images may be HV (horizontal transmit, vertical return) or VH (vertical transmit, horizontal return).

Cross-track scanner

Scanner in which a faceted mirror rotates about a horizontal axis to sweep the detector IFOV in a series of parallel scan lines oriented normal to the flight direction.

Cubic convolution

A high order resampling technique in which the brightness value of a pixel in a corrected image is interpolated from the brightness values of the 16 nearest pixels around the location of the corrected pixel.

Cut off

The digital number in the histogram of a digital image, which is set to zero during contrast stretching. Usually this is a value below which atmospheric scattering makes a major contribution.

Cycle

One complete oscillation of a wave.

Dangling ARC

An arc having the same polygon on both its left and right sides and having at least one node that does not connect to any other arc. See dangling node.

Dangling node

The dangling endpoint of a dangling arc. Often identifies that a polygon does not close properly, that arcs do not connect properly, or that an arc was digitized past its intersection with another arc. In many cases, a dangling node may be acceptable. For example, in a street centerline map, cul-de-sacs are often represented by dangling arcs.

Datum

In surveying, a reference system for computing or correlating the results of surveys. There are two principal types of datums: vertical and horizontal. A vertical datum is a level surface to which heights are referred. In the United States, the generally adopted vertical datum for leveling operations is the national geodetic vertical datums of 1929 (differing slightly from mean sea level). The horizontal datum, used as a reference for position, is defined by: the latitude and longitude of an initial point, the direction of a line between this point and a specified second point, and two dimensions which define the spheroid. In the United States, the initial point for the horizontal datum is located at Meade's Ranch in Kansas.

DEM (Digital Elevation Models)

The U.S. Geological Survey produces five primary types of digital elevation model data. They are:

7.5-minute DEM (30- x 30-m data spacing, cast on Universal Transverse Mercator (UTM) projection or 1- x 1-arc-second data spacing). Provides coverage in 7.5- x 7.5-minute blocks. Each product provides the same coverage as a standard USGS 7.5-minute map series quadrangle. Coverage: Contiguous United States, Hawaii, and Puerto Rico.

Degree DEM (3- x 3-arc-second data spacing). Provides coverage in 1-x 1-degree blocks. Two products (three in some regions of Alaska) provide the same coverage as a standard USGS 1-x 2-degree map series quadrangle. The basic elevation model is produced by or for the Defense Mapping Agency (DMA), but is distributed by USGS in the DEM data record format. Coverage: United States

30-minute DEM (2- x 2-arc-second data spacing). Consists of four 15-x 15-minute DEM blocks. Two 30-minute DEMs provide the same coverage as a standard USGS 30- x 60-minute map series quadrangle. Saleable units will be 30- x 30-minute blocks, that is, four 15- x 15-minute DEMs representing one half of a 1:100,000-scale map. Coverage: Contiguous United States, Hawaii.

15-minute Alaska DEM (2- x 3-arc-second data spacing, latitude by longitude). Provides coverage similar to a 15-minute DEM, except that the longitudinal cell limits vary from 20 minutes at the southernmost latitude of Alaska to 36 minutes at the northern most latitude limits of Alaska. Coverage of one DEM will generally correspond to a 1:63,360-scale quadrangle.

7.5-minute Alaska DEM (1- x 2-arc-second data spacing, latitude by longitude). Provides coverage similar to a 7.5-minute DEM, except that the longitudinal cell limits vary from 10 minutes at the southernmost latitude of Alaska to 18 minutes at the northernmost latitude limits of Alaska.

Densitometer

Optical device for measuring the density of photographic transparencies.

Density, of images

Measure of the opacity, or darkness, of a negative or positive transparency.

Density, of materials (r)

Ratio of mass to volume of a material, typically expressed as grams per cubic centimeter.

Density slicing

Process of converting the continuous gray tones of an image into a series of density intervals, or slices, each corresponding to a specific digital range. The density slices are then displayed either as uniform gray tones or as colors.

Depolarized

Refers to a change in polarization of a transmitted radar pulse as a result of various interactions with the terrain surface.

Depression angle (y)

In radar, the angle between the imaginary horizontal plane passing through the antenna and the line connecting the antenna and the target.

Descending node

Direction satellite is traveling relative to the Equator. A descending node would imply a southbound Equatorial crossing.

Detectability

Measure of the smallest object that can be discerned on an image.

Detector

Component of a remote sensing system that converts electromagnetic radiation into a recorded signal.

Developing

Chemical processing of an exposed photographic emulsion to produce an image.

Dielectric constant

Electrical property of matter that influences radar returns. Also referred to as complex dielectric constant.

Difference image

Image prepared by subtracting the digital values of pixels in one image from those in a second image to produce a third set of pixels. This third set is used to form the difference image.

Diffuse reflector

Surface that reflects incident radiation nearly equally in all directions.

Digital display

A form of data display in which values are shown as arrays of numbers.

Digital image

An image where the property being measured has been converted from a continuous range of analogue values to a range expressed by a finite number of integers, usually recorded as binary codes from 0 to 255, or as one byte.

Digital image processing

Computer manipulation of the digital-number values of an image.

Digital number (DN)

Value assigned to a pixel in a digital image.

Digitization

Process of converting an analog display into a digital display.

Digitizer

Device for scanning an image and converting it into numerical format.

Directional filter

Mathematical filter designed to enhance on an image those linear features oriented in a particular direction.

Distortion

On an image, changes in shape and position of objects with respect to their true shape and position.

Diurnal

Daily.

DLG (Digital Line Graph)

A DLG is line map information in digital form. The DLG data files include information about planimetric base categories, such as transportation, hydrography, and boundaries.

Doppler principle

Describes the change in observed frequency that electromagnetic or other waves undergo as a result of the movement of the source of waves relative to the observer.

Doppler radar

The weather radar system that uses the Doppler shift of radio waves to detect air motion that can result in tornadoes and precipitation, as previously-developed weather radar systems do. It can also measure the speed and direction of rain and ice, as well as detect the formation of tornadoes sooner than older radars.

Doppler shift

A change in the observed frequency of EM or other waves caused by the relative motion between source and detector. Used principally in the generation of synthetic-aperture radar images.

DOQQ

Digital ortho-quarter quadrangle

Drainage Basin

Geographic area or region containing one or more drainage areas that discharge run-off to a single point.

DTM (Digital Terrain Model)

A DTM is a land surface represented in digital form by an elevation grid or lists of three-dimensional coordinates.

Dwell time

Time required for a detector IFOV to sweep across a ground resolution cell.

Edge

A boundary in an image between areas with different tones.

Edge enhancement

Image-processing technique that emphasizes the appearance of edges and lines.

Electromagnetic radiation

Energy propagated in the form of and advancing interaction between electric and magnetic fields. All electromagnetic radiation moves at the speed of light.

Electromagnetic spectrum

Continuous sequence of electromagnetic energy arranged according to wavelength or frequency.

Emission

Process by which a body radiates electromagnetic energy. Emission is determined by kinetic temperature and emissivity.

Emissivity (e)

Ratio of radiant flux from a body to that from a blackbody at the same kinetic temperature and emissivity.

Emittance

A term for the radiant flux of energy per unit area emitted by a body. (Now obsolete).

Emulsion

Suspension of photosensitive silver halide grains in gelatin that constitutes the image-forming layer on photographic film.

Energy flux

Radiant flux.

Enhancement

Process of altering the appearance of an image so that the interpreter can extract more information.

Ephemeris

A table of predicted satellite orbital locations for specific time intervals. The ephemeris data help to characterize the conditions under which remotely sensed data are collected and are commonly used to correct the sensor data prior to analysis.

ETC

Earth-terrain camera.

Evaporative cooling

Temperature drop caused by evaporation of water from a moist surface.

Exitance

The radiant flux.

False color image

A color image where parts of the non-visible EM spectrum are expressed as one or more of the red, green, and blue components, so that the colors produced by the Earth's surface do not correspond to normal visual experience. Also called a false-color composite (FCC). The most commonly seen false-color images display the very-near infrared as red, red as green, and green as blue.

False color photograph

Another term for IR color photograph.

Far range

The portion of a radar image farthest from the aircraft or spacecraft flight path.

Fiducial marks

A set of four marks located in the corners or edge-centered, or both, of a photographic image. These marks are exposed within the camera onto the original film and are used to define the frame of reference for spatial measurements on aerial photographs. Opposite fiducial marks connected, intersect at approximately the image center of the aerial photograph.

Filter, digital

Mathematical procedure for modifying values of numerical data.

Filter, optical

A material that, by absorption or reflection, selectivity modifies the radiation transmitted through an optical system.

Flight path

Line on the ground directly beneath a remote sensing aircraft or spacecraft. Also called flight line.

Fluorescence

Emission of light from a substance following exposure to radiation from an external source.

F-number

Representation of the speed of a lens determined by the focal length divided by diameter of the lens. Smaller numbers indicate faster lenses.

Focal length

In cameras, the distance from the optical center of the lens to the plane at which the image of a very distant object is brought into focus.

Foreshortening

A distortion in radar images causing the lengths of slopes facing the antenna to appear shorter on the image than on the ground. It is produced when radar wave fronts are steeper than the topographic slope.

Format

Size of an image

Forward overlap

The percent of duplication by successive photographs along a flight line.

Fovea

The region around that point on the retina intersected by the eye's optic axis, where receptors are most densely packed. It is the most sensitive part of the retina.

Frequency (v)

The number of wave oscillations per unit time or the number of wavelengths that pass a point per unit time.

F-stop

Focal length of a lens divided by the diameter of the lens's adjustable diaphragm. Smaller numbers indicate larger openings, which admit more light to the film.

GAC (Global Area Coverage)

GAC data are derived from a sample averaging of the full resolution AVHRR data. Four out of every five samples along the scan line are used to compute one average value and the data from only every third scan line are processed, yielding 1.1 km by 4 km resolution at the subpoint.

Gamma

This is a unit of magnetic intensity.

GCP

Ground-control point. GCPs are physical points on the ground whose positions are known with respect to some horizontal coordinate system and/or vertical datum. When mutually identifiable on the ground and on a map or photographic image, GCPs can be used to establish the exact spatial position and orientation of the image to the ground. GCPs may be horizontal control points, vertical control points, or both.

Geodetic

Of or determined by geodesy; that part of applied mathematics which deals with the determination of the magnitude and figure either of the whole Earth or of a large portion of its surface. Also refers to the exact location points on the Earth's surface.

Geodetic accuracy

The accuracy with which geographic position and elevation of features on the Earth's surface are mapped. This accuracy incorporates information in which the size and shape of the Earth has been taken into account.

Geographic Information System (GIS)

A data-handling and analysis system based on sets of data distributed spatially in two dimensions. The data sets may be map oriented, when they comprise qualitative attributes of an area recorded as lines, points, and areas often in vector format, or image oriented, when the data are quantitative attributes referring to cells in a rectangular grid usually in raster format. It is also known as a geobased or geocoded information system.

Geometric correction

Image-processing procedure that corrects spatial distortions in an image.

Georegistered

An image that has been geographically referenced or rectified to an Earth model, usually to a map projection. Sometimes referred to as geocoded or geometric registration.

Geostationary

Refers to satellites traveling at the angular velocity at which the Earth rotates; as a result, they remain above the same point on Earth at all times.

Geostationary orbit

An orbit at 41 000 km in the direction of the Earth's rotation, which matches speed so that a satellite remains over a fixed point on the Earth's surface.

Geosynchronous (aka GEO)

Synchronous with respect to the rotation of the Earth. See Geostationary.

Geostationary Operational Environmental Satellite

GOES observes the U.S. and adjacent ocean areas from vantage

Geothermal

Refers to heat from sources within the Earth.

GMT

Greenwich mean time. This international 24-hour system is used to designate the time at which Landsat images are acquired.

GPS (Global Positioning System)

The GPS is a worldwide satellite navigation system that is funded and supervised by the U.S. Department of Defense. GPS satellites transmit specially coded signals. These signals are processed by a GPS receiver that computes extremely accurate measurements, including 3-dimensional position, velocity, and time on a continuous basis.

Gray scale

A sequence of gray tones ranging from black to white.

Grid format

The result of interpolation from values of a variable measured at irregularly distributed points, or along survey lines, to values referring to square cells in a rectangular array. It forms a step in the process of contouring data, but can also be used as the basis for a raster format to be displayed and analyzed digitally after the values have been rescaled to the 0 to 255 range.

Ground-control point

A geographic feature of known location that is recognizable on images and can be used to determine geometric corrections.

Ground range

On radar images, the distance from the ground track to an object.

Ground-range image

Radar image in which the scale in the range direction is constant.

Ground receiving station

Facility that records data transmitted by a satellite, such as Landsat.

Ground resolution cell

Area on the terrain that is covered by the IFOV of a detector.

Ground swath

Width of the strip of terrain that is imaged by a scanner system.

Heat capacity (c)

Ratio of heat absorbed or released by a material to the corresponding Temperature rise or fall. Expressed in calories per gram per degree centigrade. Also called thermal capacity.

Highlights

Areas of bright tone on an image.

High-pass filter

A spatial filter that selectively enhances contrast variations with high spatial frequencies in an image. It improves the sharpness of images and is a method of edge enhancement.

Histogram

A means of expressing the frequency of occurrence of values in a data set within a series of equal ranges or bins, the height of each bin representing the frequency at which values in the data set fall within the chosen range. A cumulative histogram expresses the frequency of all values falling within a bin and lower in the range. A smooth curve derived mathematically from a histogram is termed the probability density function (PDF).

Hypsography

The scientific study of the Earth's topologic configuration above sea

Image striping

A defect produced in line scanner and push-broom imaging devices produced by the non-uniform response of a single detector, or amongst a bank of detectors. In a line-scan image the stripes are perpendicular to flight direction, but parallel to it in a push-broom image.

Incidence angle

In radar, the angle formed between an imaginary line normal to the surface and another connecting the antenna and the target.

Incident energy

Electromagnetic radiation impinging on a surface.

Index of refraction (n)

Ratio of the wavelength or velocity of electromagnetic radiation in a vacuum to that in a substance.

Instantaneous field of view (IV or IFOV)

Solid angle through which a detector is sensitive to radiation. In a scanning system, the solid angle subtended by the detector when the scanning motion is stopped.

Intensity

In the IHS system, brightness ranging from black to white.

Interactive processing

Method of image processing in which the operator views preliminary

Interpretation key

A characteristic or combination of characteristics that enable an object to be identified on an image.

IR

Infrared region of the electromagnetic spectrum that includes wavelengths from 0.7 μ m to 1 mm.

IR color photograph

Color photograph in which the red-imaging layer is sensitive to photographic IR wavelengths, the green-imaging layer is sensitive to red light, and the blue-imaging layer is sensitive to green light. Also known as camouflage detection photographs and false-color photographs.

ISO index

Index of the International Standards Organization, designating film speed in photography. Higher values indicate higher sensitivity.

Isotherm

Contour line connecting points of equal temperature. Isotherm maps are used to portray surface-temperature patterns of water bodies.

Kelvin units

A Kelvin unit refers to a thermometric scale in which the degree intervals are equal to those of the Celsius scale and in which 0 degrees equals -273.15 degrees Celsius (absolute zero).

Kernel

Two-dimensional array of digital numbers used in digital filtering.

Kinetic energy

The ability of a moving body to do work by virtue of its motion. The molecular motion of matter is a form of kinetic energy.

Kinetic temperature

Internal temperature of an object determined by random molecular motion. Kinetic temperature is measured with a contact thermometer.

Lambert Azimuthal Equal Area Projection

Azimuthal Projections are formed onto a plane, which is usually tangent to the globe at either pole, the Equator, or any intermediate point. The Lambert Azimuthal Equal Area Projection is a method of projecting maps on which the azimuth or direction from a given central point to any other point is shown correctly and also on which the areas of all regions are shown in the same proportion of their true areas. When a pole is the central point, all meridians are spaced at their true angles and are straight radii of concentric circles that represent the parallels. This projection is frequently used in one of three aspects: The polar aspect is used in atlases for maps of polar regions and of the Northern and Southern Hemispheres; the equatorial aspect is commonly used for atlas maps of the Eastern and Western Hemispheres; and the oblique aspect is used for atlas maps of continents and oceans.

Lambert Conformal Conic Projection

The Lambert Conformal Conic Projection is derived by the projection of lines from the center of the globe onto a simple cone. This cone intersects the Earth along two standard parallels of latitude, both of which are on the same side of the equator. All meridians are converging straight lines that meet at a common point beyond the limits of the map. Parallels are concentric circles whose center is at the intersection point of the meridians. Parallels and meridians cross at right angles, an essential of conformality. To minimize and distribute scale errors, the two standard parallels are chosen to enclose two-thirds of the north to south map area. Between these parallels, the scale will be too small, and beyond them, too large. If the north to south extent of the mapping is limited, maximum scale errors will rarely exceed one percent. Area exaggeration between and near the standard parallels, is very slight; thus, the projection provides good directional and shape relationships for areas having their long axes running in an east to west belt

Laplacian filter

A form of nondirectional digital filter.

Laser

Light artificially stimulated electromagnetic radiation: a beam of coherent radiation with a single wavelength.

Latitude (aka the geodetic latitude)

The angle between a perpendicular at a location, and the equatorial plane of the Earth.

Layover

In radar images, the geometric displacement of the objects toward the near range relative to their base.

L-band

Radar wavelength region from 15 to 30 cm.

Level 1b

Level 1b is considered raw quality controlled data configured into discrete data sets and to which Earth location and calibration information have been appended, but not applied.

LiDAR

Light intensity detection and ranging, which uses lasers to stimulate fluorescence in various compounds and to measure distances to reflecting surfaces.

Light

Electromagnetic radiation ranging from 0.4 to 0.7 μm in wavelength that is detectable by the human eye.

Light meter

Device for measuring the intensity of visible radiation and determining the appropriate exposure of photographic film in a camera.

Lineament

Linear topographic or tonal feature on the terrain and on images, maps, and photographs that may represent a zone of structural weakness.

Linear

Adjective that describes the straight line-like nature of features on the terrain or on images and photographs.

Lination

The one-dimensional alignment of internal components of a rock that cannot be depicted as an individual feature on a map.

Line drop out

The loss of data from a scan line caused by malfunction of one of the detectors in a line scanner.

Line-pair

Pair of light and dark bars of equal widths. The number of such line-pairs aligned side by side that can be distinguished per unit distance expresses the resolving power of an imaging system.

Line scanner

An imaging device, which uses a mirror to sweep the ground surface normal to the flight path of the platform. An image is built up as a strip comprising lines of data.

Look angle

The angle between the vertical plane containing a radar antenna and the direction of radar propagation. Complementary to the depression angle.

Look direction

Direction in which pulses of microwave energy are transmitted by a radar system. The look direction is normal to the azimuth direction. Also called range direction.

Look-up table (LUT)

A mathematical formula used to convert one distribution of data to another, most conveniently remembered as a conversion graph.

Longitude

The angular distance from the Greenwich meridian (0 degree), along the equator. This can be measured either east or west to the 180th meridian (180 degrees) or 0 degree to 360 degrees W.

Low-Sun-angle photograph

Aerial photograph acquired in the morning, evening, or winter when the Sun is at a low elevation above the horizon.

Luminance

Quantitative measure of the intensity of light from a source.

Mach band

An optical illusion of dark and light fringes within adjacent areas of contrasted tone. It is a psychophysiological phenomenon, which aids human detection of boundaries or edges.

Median filter

A spatial filter, which substitutes the median value of DN from surrounding pixels for that recorded at an individual pixel. It is useful for removing random noise.

Mercator Projection

Mercator is a conformal map projection, that is, it preserves angular relationships. Mercator was designed and is recommended for navigational use and is the standard for marine charts.

Mercator is often and inappropriately used as a world map projection in atlases and for wall charts where it presents a misleading view of the world because of the excessive distortion of area in the higher latitude areas.

Microwave

Region of the electromagnetic spectrum in the wavelength range of 0.1 to 30 cm.

Mid-infrared (MIR)

The range of EM wavelengths from 8 to 14 μm dominated by emission of thermally generated radiation from materials; also known as thermal infrared.

Mie scattering

The scattering of EM energy by particles in the atmosphere with comparable dimensions to the wavelength involved.

Minimum ground separation

Minimum distance on the ground between two targets at which they can be resolved on an image.

Mixed pixel

A pixel whose DN represents the average energy reflected or emitted by several types of surface present within the area that it represents on the ground; sometimes called a mixel.

Modulate

To vary the frequency, phase, or amplitude of electromagnetic waves.

Mosaic

Composite image or photograph made by piecing together individual images or photographs covering adjacent areas.

Multiband camera

System that simultaneously acquires photographs of the same scene at different wavelengths.

Multispectral classification

Identification of terrain categories by digital processing of data acquired by multispectral scanners.

Multispectral scanner

Scanner system that simultaneously acquires images of the same scene at different wavelengths.

NAD27 (North American Datum of 1927)

NAD27 is defined with an initial point at Meads Ranch, Kansas, and by the parameters of the Clarke 1866 ellipsoid. The location of features on USGS topographic maps, including the definition of 7.5-minute quadrangle corners, are referenced to the NAD27.

NAD83 (North American Datum of 1983)

NAD83 is an Earth-centered datum and uses the Geodetic Reference System 1980 (GRS 80) ellipsoid, unlike NAD27, which is based on an initial point (Meade's Ranch, Kansas). Using recent measurements with modern geodetic, gravimetric, astrodynamical, and astronomical instruments, the GRS 80 ellipsoid has been defined as a best fit to the worldwide geoid. Because the NAD83 surface deviates from the NAD27 surface, the position of a point based on the two reference datums will be different.

Nadir

Point on the ground directly in line with the remote sensing system and the center of the Earth.

NDVI (Normalized Difference Vegetation Index)

The NDVI is computed by calculating the ratio of the VI (vegetation Index) The difference between Channel 2 and 1 and the sum of Channels 2 and 1. Thus $NDVI = (Channel\ 2 - Channel\ 1) / (Channel\ 2 + Channel\ 1)$.

Nearest neighbor resampling

When correcting image data points, the nearest neighbor technique assigns for each new pixel that pixel value which is closest in relative location to the newly computed pixel location.

Near infrared (NIR)

The shorter wavelength range of the infrared region of the EM spectrum, from 0.7 to 2.5 μm . It is often divided into very-near infrared (VNIR) covering the range accessible to photographic emulsions (0.7 to 1.0 μm), and the SWIR covering the remainder of the NIR atmospheric window from 1.0 to 2.5 μm .

Near range

Refers to the portion of a radar image closest to the aircraft or satellite flight path.

Negative photograph

Photograph on film or paper in which the relationship between bright and dark tones is the reverse of that of the features on the terrain.

Noise

Random or repetitive events that obscure or interfere with the desired information.

Nondirectional filter

Mathematical filter that treats all orientations of linear features equally.

Non-selective scattering

The scattering of EM energy by particles in the atmosphere which are much larger than the wavelengths of the energy, and which causes all wavelengths to be scattered equally.

Non-spectral hue

A hue which is not present in the spectrum of colors produced by the analysis of white light by a prism or diffraction grating. Examples are brown, magenta, and pastel shades.

Nonsystematic distortion

Geometric irregularities on images that are not constant and cannot be predicted from the characteristics of the imaging system.

Oblique photograph

Photograph acquired with the camera intentionally directed at some angle between horizontal and vertical orientations.

Orbit

Path of a satellite around a body such as the Earth, under the influence of gravity.

Orthophotograph

A vertical aerial photograph from which the distortions due to varying elevation, tilt, and surface topography have been removed, so that it represents every object as if viewed directly from above.

Orthophotoscope

An optical-electronic device, which converts a normal vertical aerial photograph to an orthophotograph.

Ortho-correction

Correction applied to satellite imagery to account for terrain-induced distortion.

Overlap

Extent to which adjacent images or photographs cover the same terrain, expressed as a percentage.

Panchromatic film

Black and white film that is sensitive to all visible wavelengths.

Parallax

Displacement of the position of a target in an image caused by a shift in the observation system.

Parallax difference

The difference in the distance on overlapping vertical photographs between two points, which represent two locations on the ground with different elevations.

Parallel-polarized

Describes a radar pulse in which the polarization of the return is the same as that of the transmission. Parallel-polarized images may be HH (horizontal transmit, horizontal return) or VV (vertical transmit, vertical return).

Pass

In digital filters, refers to the spatial frequency of data transmitted by the filter. High-pass filters transmit high-frequency data; low-pass filters transmit low-frequency data.

Passive microwaves

Radiation in the 1 mm to 1 m range emitted naturally by all materials above absolute zero.

Pattern

Regular repetition of tonal variations on an image or photograph.

Photodetector

Device for measuring energy in the visible-light band.

Photographic IR

Short-wavelength portion (0.7 to 0.9 μm) of the IR band that is detectable by IR color film or IR black-and-white film.

Photographic UV

Long-wavelength portion of the UV band (0.3 to 0.4 μm) that is transmitted through the atmosphere and is detectable by film.

Photomosaic

Mosaic composed of photographs.

Photon

Minimum discrete quantity of radiant energy.

Photopic vision

Vision under conditions of bright illumination.

Picture element

In a digitized image, the area on the ground represented by each digital number. Commonly contracted to pixel.

Pitch

Rotation of an aircraft about the horizontal axis normal to its longitudinal axis that causes a nose-up or nose-down attitude.

Pixel

Contraction of picture element.

Planck's Law

An expression for the variation of emittance of a blackbody at a particular temperature as a function of wavelength.

Point spread function (PSF)

The image of a point source of radiation, such as a star, collected by an imaging device. A measure of the spatial fidelity of the device.

Polarization

The direction of orientation in which the electrical field vector of electromagnetic radiation vibrates.

Polar orbit

An orbit that passes close to the poles, thereby enabling a satellite to pass over most of the surface, except the immediate vicinity of the poles themselves.

Polarized radiation

Electromagnetic radiation in which the electrical field vector is contained in a single plane, instead of having random orientation relative to the propagation vector. Most commonly refers to radar images.

Positive photograph

Photographic image in which the tones are directly proportional to the terrain brightness.

Precision

Precision is a statistical measurement of repeatability that is usually expressed as a variance or standard deviation, root mean square or RMS, of repeated measurements. These are expressed as x, y coordinates of arcs, label points, and tics in either single or double precision in ARC/INFO. Single-precision coordinates have up to seven significant digits of precision. This allows for a level of accuracy of approximately 10 meters for a region whose extent is 1,000,000 meters across. Double-precision coordinates have up to 15 significant digits; this allows for the precision necessary to represent any desired map accuracy at a global scale.

Previsual symptom

A vegetation anomaly that is recognizable on IR film before it is visible to the naked eye or on normal color photographs. It results when stressed vegetation loses its ability to reflect photographic IR energy and is recognizable on IR color film by a decrease in brightness of the red hues.

Primary colors

A set of three colors that in various combinations will produce the full range of colors in the visible spectrum. There are two sets of primary colors, additive and subtractive.

Principal component analysis

The analysis of covariance in a multiple data set so that the data can be projected as additive combinations on to new axes, which express different kinds of correlation among the data.

Principal-component (PC) image

Digitally processed image produced by a transformation that recognizes maximum variance in multispectral images.

Principal point

Optical center of an aerial photograph.

Printout

Display of computer data in alphanumeric format.

Probability density function (PDF)

A function indicating the relative frequency with which any measurement may be expected to occur. In remote sensing, it is represented by the histogram of DN in one band for a scene.

Projection

Orderly system of lines on a plane representing a corresponding system of imaginary lines on an adopted terrestrial or celestial datum surface. Also, the mathematical concept of such a system. For maps of the Earth, a projection consists of (1) a graticule of lines representing parallels of latitude and meridians of longitude or (2) a grid.

Pulse

Short burst of electromagnetic radiation transmitted by a radar antenna.

Pulse length

Duration of a burst of energy transmitted by a radar antenna, measured in microseconds.

Pushbroom scanner

An alternate term for an along-track scanner.

Pushbroom system

An imaging device consisting of a fixed linear array of many sensors, which is swept across an area by the motion of the platform, thereby building up an image. It relies on sensors whose response and reading is nearly instantaneous, so that the image swathe can be segmented into pixels representing small dimensions on the ground.

Quantum

The elementary quantity of EM energy that is transmitted by a particular wavelength. According to the quantum theory, EM radiation is emitted, transmitted, and absorbed as numbers of quanta, the energy of each quantum being a simple function of the frequency of the radiation.

Radar

Acronym for radio detection and ranging. Radar is an active form of remote sensing that operates in the microwave and radio wavelength regions.

Radar altimeter

A non-imaging device that records the time of radar returns from vertically beneath a platform to estimate the distance to and hence the elevation of the surface; carried by Seasat and the EAS-ERS-1 platforms.

Radar cross-section

A measure of the intensity of backscattered radar energy from a point target. Expressed as the area of a hypothetical surface, which scatters radar equally in all directions and which would return the same energy to the antenna.

Radar scattering coefficient

A measure of the back-scattered energy from a target with a large area. Expressed as the average radar cross section per unit area in decibels (db). It is the fundamental measure of the radar properties of a surface.

Radar scatterometer

A non-imaging device that records radar energy backscattered from terrain as a function of depression angle.

Radar shadow

Dark signature on a radar image representing no signal return. A shadow extends in the far-range direction from an object that intercepts the radar beam.

Radial relief displacement

The tendency of vertical objects to appear to lean radially away from the center of a vertical aerial photograph. Caused by the conical field of view of the camera lens.

Radian

Angle subtended by an arc of a circle equal in length to the radius of the circle $1 \text{ rad} = 57.3^\circ$.

Radiance

Measure of the energy radiated by an object. In general, radiance is a function of viewing angle and spectral wavelength and is expressed as energy per solid angle.

Radiant energy peak

Wavelength at which the maximum electromagnetic energy is radiated at a particular temperature.

Radiant flux

Rate of flow of electromagnetic radiation measured in watts per square centimeter.

Radiant temperature

Concentration of the radiant flux from a material. Radiant temperature is the kinetic temperature multiplied by the emissivity to the one-fourth power.

Radiation

Propagation of energy in the form of electromagnetic waves.

Radiometer

Device for quantitatively measuring radiant energy, especially thermal radiation.

Random line dropout

In scanner images, the loss of data from individual scan lines in a nonsystematic fashion.

Range

In radar usage this is the distance in the direction of radar propagation, usually to the side of the platform in an imaging radar system. The slant range is the direct distance from the antenna to the object, whereas the distance from the ground track of the platform to the object is termed the ground range.

Range direction

See look direction.

Range resolution

In radar images, the spatial resolution in the range direction, which is determined by the pulse length of the transmitted microwave energy.

Raster

The scanned and illuminated area of a video display, produced by a modulated beam of electrons sweeping the phosphorescent screen line by line from top to bottom at a regular rate of repetition.

Raster format

A means of representing spatial data in the form of a grid of DN, each line of which can be used to modulate the lines of a video raster.

Raster pattern

Pattern of horizontal lines swept by an electron beam across the face of a CRT that constitute the image display.

Ratio image

An image prepared by processing digital multi-spectral data as follows: for each pixel, the value for one band that is divided the value of another. The resulting digital values are displayed as an image.

Rayleigh criterion

In radar, the relationship between surface roughness, depression angle, and wavelength that determines whether a surface will respond in a rough or smooth fashion to the radar pulse.

Rayleigh scattering

Selective scattering of light in the atmosphere by particle that is small compared with the wavelength of light.

Real-aperture radar

Radar system in which azimuth resolution is determined by the transmitted beam width, which is in turn determined by the physical length of the antenna and by the wavelength.

Real time

Refers to images or data made available for inspection simultaneously with their acquisition.

Recognizability

Ability to identify an object on an image.

Rectilinear

Refers to images with no geometric distortion in which the scales in the horizontal and vertical directions are identical.

Redundancy

Information on an image, which is either not, required for interpretation or cannot be seen. Redundancy may be spatial or spectral. The term also refers to multispectral data where the degree of correlation between bands is so high that one band contains virtually the same information as all the bands.

Reflectance

Ratio of the radiant energy reflected by a body to the energy incident on it. Spectral reflectance is the reflectance measured within a specific wavelength interval.

Reflected IR

Electromagnetic energy of wavelengths from 0.7 μm to about 3 μm that consists primarily of reflected solar radiation

Reseau marks

Pattern of small crosses added to photographs.

Return-beam vidicon (RBV)

A system in which images are formed on the photosensitive surface of a vacuum tube; the image is scanned with an electron beam and transmitted or recorded. Landsat 3 used a pair of RBV's to acquire images.

Reflected energy peak

Wavelength (0.5 μm) at which maximum amount of energy is reflected from the Earth's surface.

Reflected IR

It consists primarily of reflected solar radiation.

Reflectivity

Ability of a surface to reflect incident energy.

Refraction

Bending of electromagnetic rays as they pass from one medium into another when each medium has a different index of refraction.

Registration

Process of superposing two or more images or photographs so that equivalent geographic points coincide.

Relief

Vertical irregularities of a surface.

Relief displacement

Geometric distortion on vertical aerial photographs. The tops of objects appear in the photograph to be radially displaced from their bases outward from the photograph's center point.

Remote sensing

Collection and interpretation of information about an object without being in physical contact with the object.

Resampling

The calculation of new DN for pixels created during geometric correction of a digital scene, based on the values in the local area around the uncorrected pixels.

Resolution

Ability to separate closely spaced objects on an image or photograph. Resolution is commonly expressed as the most closely spaced line- pairs per unit distance that can be distinguished. Also called spatial resolution.

Resolution target

Series of regularly spaced alternating light and dark bars used to evaluate the resolution of images or photographs.

Resolving power

A measure of the ability of individual components. And of remote sensing systems, to separate closely spaced targets.

Reststrahlen band

In the IR region, refers to absorption of energy as a function of silica content.

Return

In radar, a pulse of microwave energy reflected by the terrain and received at the radar antenna. The strength of a return is referred to as return intensity.

Ringings

Fringe-like artifacts produced at edges by some forms of spatial-frequency filtering.

Rods

The receptors in the retina that are sensitive to brightness variations.

Roll

Rotation of an aircraft that causes a wing-up or wing-down attitude.

Roll compensation system

Component of an airborne scanner system that measures and records the roll of the aircraft. This information is used to correct the imagery for distortion due to roll.

Rough criterion

In radar, the relationship between surface roughness, depression angle, and wavelength that determines whether a surface will scatter the incident radar pulse in a rough or intermediate fashion.

Roughness

In radar, the average vertical relief of a small-scale irregularities of the terrain surface. Also called surface roughness

RMSE (Root Mean Square Error)

The RMSE statistic is used to describe accuracy encompassing both random and systematic errors. The square of the difference between a true test point and an interpolated test point divided by the total number of test points in the arithmetic mean. The square root of this value is the root mean square error.

Satellite

An object in orbit around a celestial body.

Saturation

In the IHS system, represents the purity of color. Saturation is also the condition where energy flux exceeds the sensitivity range of a detector.

Scale

Ratio of distance on an image to the equivalent distance on the ground.

Scan line

Narrow strip on the ground that is swept by IFOV of a detector in a scanning system.

Scanner

An imaging system in which the IFOV of one or more detectors is swept across the terrain.

Scanner distortion

Geometric distortion that is characteristic of cross-track scanner images.

Scan skew

Distortion of scanner images caused by forward motion of the aircraft or satellite during the time required for scanning completion.

Scattering

Multiple reflections of electromagnetic waves by particles or surfaces.

Scattering coefficient curves

Display of scatterometer data in which relative backscatter is shown as a function of incidence angle.

Scatterometer

Nonimaging radar device that quantitatively records backscatter of terrain as a function of incidence angle.

Scene

Area on the ground that is covered by an image or photograph.

Scotopic vision

Vision under conditions of low illumination, when only the rods are sensitive to light. Visual acuity under these conditions is highest in the blue part of the spectrum.

Sensitivity

Degree to which a detector responds to electromagnetic energy incident on it.

Sensor

Device that receives electromagnetic radiation and converts it into a signal that can be recorded and displayed as either numerical data or an image.

Shaded relief

Shading added to an image that makes the image appear to have three-dimensional aspects. This type of enhancement is commonly done to satellite images and thematic maps utilizing digital topographic data to provide the appearance of terrain relief within the image.

Sidelap

Extent of lateral overlap between images acquired on adjacent flight lines.

Side-looking airborne radar (SLAR)

An airborne side scanning system for acquiring radar images.

Side-scanning sonar

Active system for acquiring images of the seafloor using pulsed sound waves.

Signal

Information recorded by a remote sensing system.

Signal-to-noise ratio (S/N)

The ratio of the level of the signal carrying real information to that carrying spurious information as a result of defects in the system.

Skylight

Component of light that is strongly scattered by the atmosphere and consists predominantly of shorter wavelengths.

Slant range

In radar, an imaginary line running between the antenna and the target.

Slant-range distance

Distance measured along the slant range.

Slant-range distortion

Geometric distortion of a slant-range image.

Slant-range image

In radar, an image in which objects are located at positions corresponding to their slant-range distances from the aircraft path. On slant-range images, the scale in the range direction is compressed in the near-range region.

SLAR

Side-looking airborne radar.

SMMR

Scanning Multichannel Microwave Radiometer, carried by Nimbus-7.

Smooth criterion

In radar, the relationship between surface roughness, depression angle, and wavelength that determines whether a surface will scatter the incident radar pulse in a smooth or intermediate fashion.

Sonar

Acronym for sound navigation ranging. Sonar is an active form of remote sensing that employs sonic energy to image the seafloor.

Spatial-frequency filtering

The analysis of the spatial variations in DN of an image and the separation or suppression of selected frequency ranges.

Specific heat

The ratio of the heat capacity of unit mass of a material to the heat capacity of unit mass of water.

Spectral hue

A hue that is present in the spectral range of white light and is analyzed by a prism or diffraction grating.

Spectral reflectance

Reflectance of electromagnetic energy at specified wavelength intervals.

Spectral sensitivity

Response, or sensitivity, of a film or detector to radiation in different spectral regions.

Spectral vegetation index

An index of relative amount and vigor of vegetation. The index is calculated from two spectral bands of AVHRR imagery.

Spectrometer

Device for measuring intensity of radiation absorbed or reflected by a material as a function of wavelength.

Spectroradiometer

A device that measures the energy reflected or radiated by materials in narrow EM wavebands.

Spectrum

Continuous sequence of electromagnetic energy arranged according to wavelength or frequency.

Specular

Refers to a surface that is smooth with respect to the wavelength of incident energy.

Stefan-Boltzmann constant

$5.68 \times 10^{-12} \text{ W} \cdot \text{m}^2 \cdot \text{K}^{-4}$.

Stefan-Boltzmann Law

States that radiant flux of a blackbody is equal to the temperature to the fourth power times the Stefan-Boltzmann constant.

Stereo base

Distance between a pair of correlative points on a stereo pair that are oriented for stereo viewing.

Stereo model

Three-dimensional visual impression produced by viewing a pair of overlapping images through a stereoscope.

Stereo pair

Two overlapping images or photographs that may be viewed stereoscopically.

Stereopsis

The ability for objects to be perceived in three dimensions as a result of the parallax differences produced by the eye base.

Stereoscope

Binocular optical device for viewing overlapping images or diagrams. The left eye sees only the left image, and the right eye sees only the right image.

Subscene

A portion of an image that is used for detailed analysis.

Subtractive primary colors

Yellow, magenta, and cyan. When used as filters for white light, these colors remove blue, green and red light, respectively.

Sunglint

Bright reflectance of sunlight caused by ripples on water.

Sun-synchronous

Earth satellite orbit in which the orbit plane is nearly polar and the altitude is such that the satellite passes over all places on Earth having the same latitude twice daily at the same local Sun time.

Sun-synchronous orbit

A polar orbit where the satellite always crosses the Equator at the same local solar time.

Supervised classification

Digital-information extraction technique in which the operator provides training-site information that the computer uses to assign pixels to categories.

Surface phenomenon

Interaction between electromagnetic radiation and the surface of a material.

Surface roughness

See roughness.

Synthetic-aperture radar (SAR)

Radar system in which high azimuth resolution is achieved by storing and processing data on the Doppler shift of multiple return pulses in such a way as to give the effect of a much longer antenna.

System

Combination of components that constitute an imaging device.

Target

Object on the terrain of specific interest in a remote sensing investigation.

Terrain

Surface of the Earth.

Texture

Frequency of change and arrangement of tones on an image.

Thematic Data

Thematic data layers in a data set are layers of information that deal with a particular theme. These layers are typically related information that logically go together. Examples of thematic data would include a data layer whose contents are roads, railways, and river navigation routes.

Thermal inertia (P)

Measure of the response of a material to temperature changes, expressed in calories per square centimeter per square root of second.

Thermal IR

IR region from 3 to 14 μm that is employed in remote sensing. This spectral region spans the radiant power peak of the Earth.

Tone

Each distinguishable shade of gray from white to black on an image.

Training site

Area of terrain with known properties or characteristics that is used in supervised classification.

Travel time

In radar, the time interval between the generation of a pulse of microwave energy and its return from the terrain.

Unsupervised classification

Digital information extraction technique in which the computer assigns pixels to categories with no instructions from the operator.

Universal Transverse Mercator Projection (UTM)

UTM is a widely used map projection that employs a series of identical projections around the world in the mid-latitude areas, each spanning six degrees of longitude and oriented to a meridian. This projection is characterized by its conformality; that is, it preserves angular relationships and scale plus it easily allows a rectangular grid to be superimposed on it. Many worldwide topographic and planimetric maps at scales ranging between 1:24,000 and 1:250,000 use this projection.

Ultraviolet (UV)

Ultraviolet region of the electromagnetic spectrum ranging in wavelengths from 0.01 to 0.4m.

Variance

A measure of the dispersion of the actual values of a variable about its mean. It is the mean of the squares of all the deviations from the mean value of a range of data.

Vector

Any quantity, which has both magnitude and direction, as opposed to scalar that has only magnitude.

Vector data

Vector data, when used in the context of spatial or map information, refers to a format where all map data is stored as points, lines, and areas rather than as an image or continuous tone picture. These vector data have location and attribute information associated with them.

Vector format

The expression of points, lines, and areas on a map by digitized Cartesian coordinates, directions, and values.

Vegetation anomaly

Deviation from the normal distribution or properties of vegetation. Vegetation anomalies may be caused by faults, trace elements in soil, or other factors.

Vertical exaggeration

In a stereo model, the extent to which the vertical scale appears larger than the horizontal scale.

Visible radiation

Energy at wavelengths from 0.4 to 0.7mm that is detectable by the human eye.

Watt (W)

Unit of electrical power equal to rate of work done by one ampere under a potential of one volt.

Wavelength

Distance between successive wave crests or other equivalent points in a harmonic wave.

Wien's displacement law

Describes the shift of the radiant power peak to shorter wavelengths as temperature increases.